

POWERING PROFESSIONALS SINCE 1898

AEG



AEG-POWERTOOLS.EU

WHEN WE SAY THEY LAST, **WE MEAN IT.**



BEST IN CLASS DURABILITY. UNMATCHED POWER. PROFESSIONAL PERFORMANCE.

We're prepared to put our money where our mouth is when it comes to our range of AEG power tools. That's why we've extended the warranties across our entire power tool range. With an incredible 6 year tool warranty and 3 year guarantee for batteries and chargers, trade professionals trust the legendary durability of AEG.



WEMEANN



CORDLESS SYSTEMS

| PRO18V RANGE | 6-43 |
|-------------------------------|-------|
| PRO18V DRILLING AND FASTENING | 8-20 |
| Percussion Drills | 8-11 |
| Drill Drivers | 12-14 |
| Impact Drivers | 15-16 |
| SDS-Plus Hammers | 17 |
| Impact Wrench | 18-20 |
| PRO18V METALWORKING | 21-24 |
| Cut Off Tool | 21 |
| Angle Grinder | 22-24 |
| PRO18V SAWING | 25-29 |
| Circular Saws | 25 |
| Reciprocating Saws | 26-27 |
| Mitre Saw | 27 |
| Jigsaw | 28 |
| Chainsaw | 29 |
| PRO18V SANDING & | |
| WOODWORKING | 29-31 |
| Planer | 29 |
| Router | 30 |
| Sanders | 30-31 |
| Multi-Tool | 31 |
| PRO18V SPECIALITY | 32-38 |
| Drywall Screwdriver | 32 |
| Nail Guns | 32-33 |
| Caulk Gun | 33-34 |
| Compressors and Inflators | 34-35 |
| Radio | 36 |
| Vacuum | 36 |
| Blowers | 37 |
| USB Charger | 38 |
| PRO18V LIGHTING | 38-39 |
| PRO18V BATTERIES | 40-43 |
| 18V BATTERIES | 38-39 |
| 18V KITS | 42 |
| 18V CHARGERS | 43 |

| 2V POWER | 44-50 |
|-------------------------|-------|
| 6.6V Inline Screwdriver | 50 |
| DMNI PRO | 51-54 |
| TEST AND MEASURING | 55-58 |
| Self-levelling Lasers | 55-58 |
| aser Distance Measurer | 58 |

CORDED SYSTEMS

| AC HAMMER AND DRILLING RANGE | 59-68 |
|------------------------------|--------|
| SDS Plus | 60-62 |
| SDS Max | 62-64 |
| Percussion Drills | 66-67 |
| Diamond Drill | 68 |
| Wall Chaser | 68 |
| Screwdriver | 68 |
| AC METAL WORKING RANGE | 69-76 |
| Small Angle Grinders | 70-71 |
| Large Angle Grinders | 72-73 |
| Die Grinders | 74 |
| Polisher | 75 |
| Right Angle Sander | 76 |
| Metal Chop saw | 76 |
| AC WOODWORKING RANGE | 77-88 |
| AC Multi Tool | 78 |
| Circular Saws | 78-79 |
| Jigsaws | 79-81 |
| Router | 82 |
| Planer | 82 |
| Reciprocating Saws | 83 |
| Sanders | 84-85 |
| Heat Guns | 86 |
| Mitre Saws | 86-87 |
| Mitre Saw Leg stand | 88 |
| Dust Extraction | 88 |
| ACCESSORIES RANGE | 89-103 |
| Batteries & Chargers | 90 |
| Accessories | 91-104 |
| Storage | 105 |
| NOTES 1 | 06-107 |

PRO TOOLS. ONE BATTERY. CHOOSE A STARTER PACK PRO 18v (1)NEW NEW CHOOSE YOUR 2 PRO 18 LESS PRO HLESS PRO 18 18V COMPACT BRUSHLESS PERCUSSION DRILL 18V COMPACT 18V SUBCOMPACT NEW NEW PRO 18v BRUSHLESS PRO 18v BRUSHLESS PRO 18v BRUSHLESS PRO 18v BRUSHLESS 18V BRUSHLESS 18V BRUSHLESS PERCUSSION DRILL 18V BRUSHLESS 18V COMPACT 18V COMPACT 18V BRUSHLESS SDS-PLUS DRILL 18V PERCUSSION DRILL 18V DRILL DRIVER NEW NEW 17 PRO 18v BRUSHLESS PRO 18v B PRO 18v BRUSHLESS PRO 18v BRUSHLESS PRO 18v BRUSHLESS 18V BRUSHLESS OIL PULSE IMPACT DRIVER 18V BRUSHLESS DRYWALL SCREWDRIVER 18V COMPACT 18V BRUSHLESS 18V SUBCOMPACT IMPACT DRIVER 18V BRUSHLESS 6 MODE IMPACT DRIVER 18V COMPACT SDS 18V IMPACT DRIVER



PRO

USHLESS

18V BRUSHLESS 6 MODE IMPACT WRENCH

RSS18C127RA

HLESS

PRO 18v BRUS

18V 16GA BRUSHLESS NAIL GUN

PRO 18v BRUSHLESS

18V 18GA BRUSHLESS NAIL GUN

> ALL BATTERIES **100%** BACKWARDS COMPATIBLE



NEW

PRO

18V BRUSHLESS CIRCULAR SAW

PRO 18 BRUSHLESS

18V BRUSHLESS SUBCOMPACT IMPACT WRENCH

NEW

PRO 18 BRUSHLESS

18V 6 MODE HIGH TORQUE 1/2" IMPACT WRENCH



18V CIRCULAR SAW

*Register within 30 days of purchase. See online for more details. AEG is a registered trademark used under license from AB Electrolux (publ)



18V CIRCULAR SAW

NEW





1

NEW

DUAL BATTERY CHARGER

BL1418

NEW

18V 2.0AH PROLITHIUM-ION™ BATTERY L1820S

18V 4.0AH PROLITHIUM-ION™

NEW

BATTERY

L1840S



18V 4.0AH **PROLITHIUM-ION™** BATTERY

L1840R

18V 5.0AH **PROLITHIUM-ION™** BATTERY

L1850R

BATTERY

L1830RHD

18V 3.0AH HIGH 18V 6.0AH HIGH **DEMAND LITHIUM**

DEMAND LITHIUM

L1890RHD

18V 9.0AH HIGH

DEMAND LITHIUM

L1860RHD

1.

AEG



PRO 18v BRUSHLESS SUBCOMPACT

COMPACT WITHOUT COMPROMISE

The most compact 18V tools AEG has ever made. Users want a product that delivers the performance to complete application, durability to withstand jobsite and compact size/ weight for ease of use.

The new SUBCOMPACT range from AEG **Powertools range** delivers more impact in, 12V size with 18V pow










POWERFUL

visit aeg-powertools.eu/subcompact to find out more details

NEW MOTOR TECHNOLOGY **AT ITS CORE**

At the core of our new subcompact tools is new motor technology,

allowing our tools to be smaller and more compact. We've changed the design of our motor, flipping it inside out to allow for more magnets generating more torque output. Giving us a 60% smaller motor but with 40% more magnets, creating the same power as previous 18V tools, but in a much smaller package.

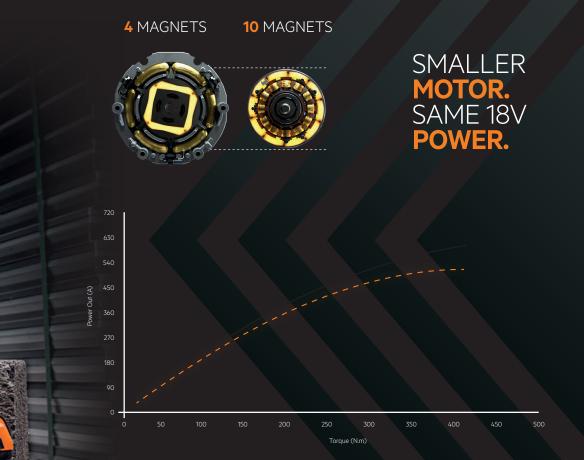

d

UP TO 30% MORE

vs equivalent 18V AEG products

The ultimate in productivity. Subcompact tools provide the trade professional with easy to use, compact tools, without compromising on performance.

As part of the PRO18V range, AEG Subcompact offers the same relentless runtime and class leading power in a compact size, allowing you to switch to smaller tools with no need for new chargers or batteries

18V BRUSHLESS PERCUSSION DRILL

- PROFLUX™ Brushless Motor for more power, and reduced length of the tool
- Only 202mm in length for perfect ergonomics
- 140Nm with Pro Lithium Ion HD batteries
- Extra long side handle for perfect handling of the tool and working in total safety
- 2 speed gearbox 0-500 / 0-2.000rpm
- 13mm metal chuck with carbide tips for the heaviest applications
- Microtexture overmould for the best handling on the market
 LED light on the foot print to illuminate the work surface
- LED light on the foot print to illuminate the work surface
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



BSB 18BL

| | BSB 18BL-0 | BSB 18BL LI-602C |
|---|---------------|------------------|
| Battery type | Li-ion | Li-ion |
| Battery pack capacity (Ah) | - | 6,0 |
| No. of batteries supplied | 0 | 2 |
| Charger supplied | - | 85 min |
| Max. drilling wood/ steel/ masonry (mm) | 100 / 13 / 20 | 100 / 13 / 20 |
| Chuck capacity (mm) | 13 | 13 |
| Max. torque (Nm) | 140 | 140 |
| No load speed (rpm) | 500 - 2000 | 500 - 2000 |
| Max. percussion rate (bpm) | 32.000 | 32.000 |
| Weight with battery pack (kg) | 2,5 | 2,5 |
| Supplied in | Gift box | Kitbox |
| Article Number | 4935464099 | 4935464100 |
| EAN Code | 4058546220440 | 4058546220457 |



4 058546 2204

18V BRUSHLESS PERCUSSION DRILL

- PROFLUX[™] Brushless Motor for more power, more runtime in a smaller tool
- Removable 13mm ratchet chuck for the heaviest applications
- 75Nm with a (4.0Ah) battery for maximum torque which delivers complete power
- 2 speed 0-550 / 0-2100rpm
- Only 151mm without the chuck and with chuck 193mm in length
- 1/2" HEX reception under the chuck, 25mm screwdriving bit can be held in the reception while the chuck is mounted
- Offset and right angle attachment are sold as accessories
- New microtexture overmould for the best handling on the market
- LED light on the foot print to illuminate the work surface
- 3 mode selector ease of use between applications
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool
- Supplied with a side handle and a 13mm removable chuck



| | BSB 18CBL-0 | BSB 18CBL LI-402C |
|---|--------------------|--------------------|
| Battery type | Li-ion | Li-ion |
| Battery pack capacity (Ah) | - | 4,0 |
| No. of batteries supplied | 0 | 2 |
| Charger supplied | - | 80 min |
| Max. drilling wood/ steel/ masonry (mm) | 45 / 13 / 14 | 45 / 13 / 14 |
| Chuck capacity (mm) | 1,5 - 13 | 1,5 - 13 |
| Max. torque (Nm) | 75 | 75 |
| No load speed (rpm) | 0 - 550 / 0 - 2100 | 0 - 550 / 0 - 2100 |
| Max. percussion rate (bpm) | 7150 / 27.300 | 7150 / 27.300 |
| Weight with battery pack (kg) | 1,8 | 2,1 |
| Supplied in | Gift box | Kitbox |
| Article Number | 4935451082 | 4935448463 |
| EAN Code | 4002395811083 | 4002395259373 |





BSB 18CBL-0

BSB 18CBL

18V SUB COMPACT BRUSHLESS PERCUSSION DRILL

BSB 18SBL


- Compact and powerful Sub Compact brushless motor technology delivers up to 65Nm of torque
- Sub Compact design provides ultimate user productivity and ergonomics
- 26.000 bpm percussion mode for concrete and masonary drilling up to 13mm
- Lightweight tool at only 1.3Kg with PRO18V 2.0Ah pack
- Only 165mm in length allows tool to fit into tight spaces
- 2 speed gear box, 0 450 rpm & 0 1750 rpm
- 24 stage clutch for ultimate control when in screwing applications
- 13mm Metal chuck
- PRO18V system compatibility



| | BSB 18SBL-0 | BSB 18SBL-202C |
|-------------------------------|---------------------|----------------|
| Battery type | Li-ion | Li-ion |
| Battery pack capacity (Ah) | - | 2 |
| No. of batteries supplied | 0 | 2 |
| Charger supplied | No charger supplied | 40 min |
| Chuck capacity (mm) | 13 | 13 |
| Max. torque (Nm) | 65 | 65 |
| Max. percussion rate (bpm) | 24.600 | 26.000 |
| Weight with battery pack (kg) | 1.4 | 1.4 |
| Supplied in | Gift box | Kitbox |
| Article Number | 4935478456 | 4935478455 |
| EAN Code | 4058546346478 | 4058546346461 |





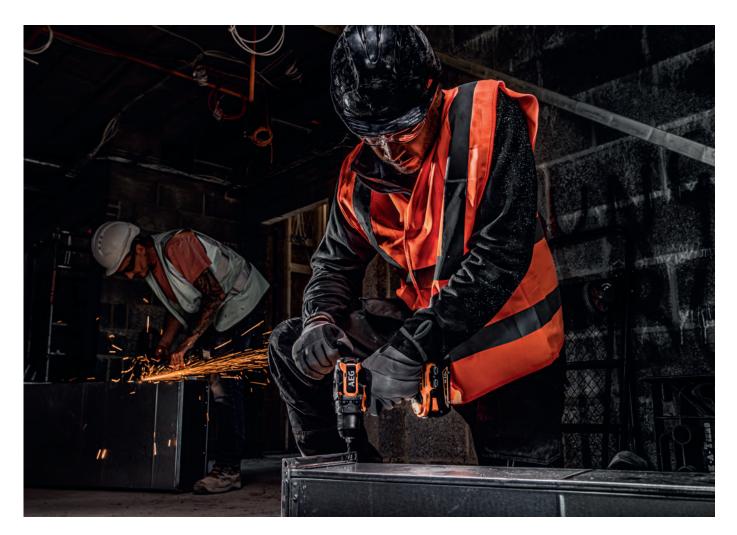

18V BRUSHLESS PERCUSSION DRILL

- PROFLUX™ Brushless Motor for more power, and reduced length of the tool
- Brushless motor delivers torque up to 65Nm (4.0Ah)
- Only 183mm in length
- 2 speeds 0-500 / 0-1950rpm
- Robust mode selector with By-Pass
- LED for work place illumination
- 13mm metal chuck for improved durability
- Compatible with AEG PROLITHIUMION[™] battery technology featuring overload protection for maximum durability of battery and tool



| | BSB 18C2BL LI-202C | BSB 18C2BL LI-402C | |
|---|--------------------|--------------------|--|
| Battery type | Li-ion | Li-ion | |
| Battery pack capacity (Ah) | 2,0 | 4,0 | |
| No. of batteries supplied | 2 | 2 | |
| Charger supplied | 40 min | 100 min | |
| Max. drilling wood/ steel/ masonry (mm) | 40 / 13 / 13 | 40 / 13 / 13 | |
| Chuck capacity (mm) | 13 | 13 | |
| Max. torque (Nm) | 65 | 65 | |
| No load speed (rpm) | 0 - 500 / 0 - 1950 | 0 - 500 / 0 - 1950 | |
| Max. percussion rate (bpm) | 25.350 | 25.350 | |
| Weight with battery pack (kg) | 1,8 | 2,0 | |
| Supplied in | Kitbox | Kitbox | |
| Article Number | 4935464096 | 4935464097 | |
| EAN Code | 4058546220419 | 4058546220426 | |
| | | | |

18V PERCUSSION DRILL

- 206mm in length and only 161mm without the chuck
- 60Nm maximum torque delivers complete power
- 2 speeds 0-450 / 0-1800rpm
- 13mm metal removable chuck for improved durability and more versatility
- Robust mode selector with By-Pass
- LED for work place illumination
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool





BSB 18C2X



| | BSB 18C2X LI-202C | |
|---|--------------------|--|
| Battery type | Li-ion | |
| Battery pack capacity (Ah) | 2,0 | |
| No. of batteries supplied | 2 | |
| Charger supplied | 40 min | |
| Max. drilling wood/ steel/ masonry (mm) | 45 / 13 / 14 | |
| Chuck capacity (mm) | 13 | |
| Max. torque (Nm) | 50 | |
| No load speed (rpm) | 0 - 450 / 0 - 1800 | |
| Max. percussion rate (bpm) | 23.400 | |
| Weight with battery pack (kg) | 1,74 | |
| Supplied in | Kitbox | |
| Article Number | 4935459424 | |
| EAN Code | 4058546010850 | |



BSB 18C2 BL

18V PERCUSSION DRILL

BSB 18C2

- Small, compact & powerful for high torque applications
- Only 191 mm in length
- 60 Nm maximum torque delivers complete power
- 2 speeds 0-450 / 0-1800 rpm
- Robust mode selector with By-Pass
- LED for work place illumination
- Forward and reverse
- 13mm Metal chuck for improve durability
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool



| | BSB 18C2LI-202C |
|---|--------------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | 2,0 |
| No. of batteries supplied | 2 |
| Charger supplied | 40 min |
| LED | Yes |
| Max. drilling wood/ steel/ masonry (mm) | 45 / 13 / 14 |
| No load speed (rpm) | 0 - 450 / 0 - 1800 |
| Max. torque (Nm) | 60 |
| Weight with battery pack (kg) | 1,71 |
| Supplied in | Kitbox |
| Article Number | 4935459722 |
| EAN Code | 4058546028947 |

18V PERCUSSION DRILL

- Compact and lightweight Percussion Drill delivering up to 60Nm of torque
- 2 speed gear box, 0 500 rpm & 0 1900 rpm
- Percussion mode provides up to 30400 bpm for fast drilling into masonary
- Lightweight tool at only 1.4Kg with PRO18V 2.0Ah battery
- 24 stage clutch for ultimate control when in screwing applications
- 13mm professional chuck
- PRO18V system compatibility



NEW

| BSB 18G4-0 | BSB 18G4-202C |
|---------------|--|
| Li-ion | Li-ion |
| - | 2,0 |
| 2 | 2 |
| - | 60 min |
| 54 / 13 / 13 | 54 / 13 / 13 |
| 13 | 13 |
| 60 | 60 |
| 0 - 500 | 0 - 500 |
| 0 - 1900 | 0 - 1900 |
| 30,400 | 30,400 |
| 1,65 | 1,65 |
| Gift box | Kitbox |
| 4935478632 | 4935478631 |
| 4058546348250 | 4058546348243 |
| | Li-ion - 2 - 54 / 13 / 13 13 60 0 - 500 0 - 1900 30,400 1,65 Gift box 4935478632 |





18V BRUSHLESS DRILL DRIVER

- PROFLUX™ Brushless Motor for more power, more runtime in a more compact tool
- Only 176mm in length for an extremely compact and perfectly balanced drill driver
- 75Nm with a (4.0Ah) battery for maximum torque delivers complete power
- 2 speeds 0-550 / 0-2100rpm
- 13mm ratchet chuck for withstanding the heaviest applications and a perfect torque transmission to the accessory
- New microtexture overmould for the best handling on the market
- LED light on the foot print to illuminate the work surface
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durabilty of
- battery and tool
- Supplied with a side handle



| | BS 18CBL LI-202C |
|--------------------------------|--------------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | 2,0 |
| No. of batteries supplied | 2 |
| Charger supplied | 40 min |
| Max. drilling wood/ steel (mm) | 45 / 13 |
| Chuck capacity (mm) | 1,5 - 13 |
| Max. torque (Nm) | 75 |
| No load speed (rpm) | 0 - 550 / 0 - 2100 |
| Weight with battery pack (kg) | 1,8 |
| Supplied in | Kitbox |
| Article Number | 4935448768 |
| EAN Code | 4002395294572 |

18V SUB COMPACT BRUSHLESS DRILL DRIVER

- Compact and powerful Sub Compact brushless motor technology delivers up to 65Nm of torque
- Sub Compact design provides ultimate user productivty and ergonomics
- Lightweight tool at only 1.3Kg with PRO18V 2.0Ah pack
- Only 157mm in length allows tool to fit into tight spaces
- 2 speed gear box, 0 450 rpm & 0 1750 rpm
- 24 stage clutch for ultimate control when in screwing applications
- 13mm Metal chuck
- PRO18V system compatibility





| | BS 18SBL-202C |
|---|---------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | 2,0 |
| No. of batteries supplied | 2 |
| Max. drilling wood/ steel/ masonry (mm) | 40 13 |
| Chuck capacity (mm) | 13 |
| Max. torque (Nm) | 65 |
| No load speed (rpm) | 0-450, 0-1750 |
| Weight with battery pack (kg) | 1,3 |
| Supplied in | Kitbox |
| Article Number | 4935472277 |
| EAN Code | 4058546339234 |



BS 18CBL

18V BRUSHLESS DRILL DRIVER

BS 18C2BL

- PROFLUX™ Brushless Motor for more power, and reduced length of the tool
- Brushless motor delivers torque up to 65Nm (4.0Ah)
- Only 176mm in length
- 2 speeds 0-500 / 0-1950rpm
- Robust mode selector with By-Pass
- LED for work place illumination
- 13mm metal chuck for improved durability
- Compatible with AEG PROLITHIUMION[™] battery technology featuring overload protection for maximum durability of battery and tool



| BS 18C2BL LI-202C | BS 18C2BL LI-402C | |
|--------------------|--|---|
| Li-ion | Li-ion | |
| 2,0 | 4,0 | |
| 2 | 2 | |
| 40 min | 80 min | |
| 40 / 13 | 40 / 13 | |
| 13 | 13 | |
| 65 | 65 | |
| 0 - 500 / 0 - 1950 | 0 - 500 / 0 - 1950 | |
| 1,7 | 1,9 | |
| Kitbox | Kitbox | |
| 4935464094 | 4935464095 | |
| 4058546220396 | 4058546220402 | |
| | Li-ion 2,0 2 40 min 40 / 13 13 65 0 - 500 / 0 - 1950 1,7 Kitbox 4935464094 | Li-ion Li-ion 2,0 4,0 2 2 40 min 80 min 40 / 13 40 / 13 13 13 65 65 0 - 500 / 0 - 1950 0 - 500 / 0 - 1950 1,7 1,9 Kitbox Kitbox 4935464094 4935464095 |





18V COMPACT DRILL DRIVER

- Changeable chuck for different attachments or screwdriving without the chuck for hard to reach areas
- 202mm in length and only 158mm without the chuck
- 60Nm (4.0Ah) maximum torque delivers complete power
- 2 speeds 0-450 / 0-1800rpm
- 13mm metal removable chuck for improved durability and more versatility
- Robust mode selector with By-Pass
- LED for work place illumination
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



Δ

| | BS 18C2X LI-202C | |
|--------------------------------|--------------------|--|
| Battery type | Li-ion | |
| Battery pack capacity (Ah) | 2,0 | |
| No. of batteries supplied | 2 | |
| Charger supplied | 30 min | |
| Max. drilling wood/ steel (mm) | 45 / 13 | |
| Chuck capacity (mm) | 13 | |
| Chuck type | Removable | |
| Max. torque (Nm) | 60 | |
| No load speed (rpm) | 0 - 450 / 0 - 1800 | |
| Weight with battery pack (kg) | 1,7 | |
| Supplied in | Kitbox | |
| Article Number | 4935459423 | |
| EAN Code | 4058546010843 | |



BS 18C2X

18V COMPACT DRILL DRIVER

- Small, compact & powerful for high torque applications
- Only 187mm in length
- 60Nm (4.0Ah) maximum torque delivers complete power
- 2 speeds 0-450 / 0-1800rpmRobust mode selector with By-Pass
- LED for work place illumination
- 13mm metal chuck for improved durability
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BS18C2 LI-202C |
|--------------------------------|--------------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | 2,0 |
| No. of batteries supplied | 2 |
| Charger supplied | 40 min |
| Max. drilling wood/ steel (mm) | 45 / 13 |
| Max. torque (Nm) | 50 |
| No load speed (rpm) | 0 - 450 / 0 - 1800 |
| Weight with battery pack (kg) | 1,68 |
| Supplied in | Kitbox |
| Article Number | 4935459721 |
| EAN Code | 4058546028930 |

18V DRILL DRIVER

- Compact and lightweight Drill Driver delivering up to 60Nm of torque
- 2 speed gear box, 0 500 rpm & 0 1900 rpm
- Lightweight tool at only 1,60Kg with PRO18V 2.0Ah battery
- 24 stage clutch for ultimate control when in screwing applications
- 13mm proffesional chuck
- PRO18V system compatibility







| | BS 18G4-202C |
|--------------------------------|-------------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | 2,0 |
| No. of batteries supplied | 2 |
| Charger supplied | 60 min |
| Max. drilling wood/ steel (mm) | 54 / 13 |
| Chuck capacity (mm) | 13 |
| No load speed (rpm) | 0 - 500 / 0 -1800 |
| Weight with battery pack (kg) | 2.02 |
| Supplied in | Kitbox |
| Article Number | 4935478630 |
| EAN Code | 4058546348236 |



BS 18C2



Compact and powerful Sub Compact brushless motor technology delivers up to 200Nm of torque

3 Speed gear box provides ultimate control through all applications
Sub Compact design provides ultimate user productivty and ergonomics

Lightweight tool at only 1.3Kg with PRO18V 2.0Ah packOnly 119mm in length allows tool to fit into tight spaces

1/4" Hex receptionPRO18V system compatibility

BSS 18SBL

NEW

| | BSS 18SBL-0 | |
|-------------------------------|---------------|--|
| Battery type | Li-ion | |
| No. of batteries supplied | 0 | |
| Max. torque (Nm) | 200 | |
| No load speed (rpm) | 0-2900 | |
| Impact rate (ipm) | 0-4200 | |
| Tool reception | %" Нех | |
| Weight with battery pack (kg) | 1,3 | |
| Supplied in | Gift box | |
| Article Number | 4935472278 | |
| EAN Code | 4058546339241 | |

BSS 18SBL-0



18V BRUSHLESS 6-MODE IMPACT DRIVER

- Powerful 280Nm of torque for high-torque driving
- Intuitive 6-mode selection panel for a wide range of torque options to cover many applications
- Speeds 1,2 & 3 behave like a standard impact driver increasing in speed and power
- Autostop Mode shuts the tool off after impact to prevent material and fasterner damage
- Pulse mode starts with slow bursts of movement to help remove rusted or damaged screws
- Self tapping mode will slow the tool down once the screw has cut through top material to ensure a secure fixing
- PROFLUX Brushless Motor with Coretek Technologies delivers market leading power and runtime
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool

| | BSS 18B6-0 |
|-------------------------------|------------------------------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | - |
| No. of batteries supplied | 0 |
| Max. torque (Nm) | 280 |
| No load speed (rpm) | 50 - 750 / 210 - 2100 / 280 - 3000 |
| Impact rate (ipm) | 0 - 4000 |
| Tool reception | ½" Hex |
| Weight with battery pack (kg) | 1,72 |
| Supplied in | Gift box |
| Article Number | 4935472013 |
| EAN Code | 4058546324094 |

BSS 18B6





18V OIL PULSE IMPACT DRIVER

- New Oil Pulse Technology reduces the noise of the impact to only 73dB
- Compact and ergonomic with only 152mm overall length
- Easy carriage with the belt clip, user can work hands free even on a ladder
- PROFLUX™ Brushless Motor Technology allows extreamly fast driving applications up to M14 Capacity
- 3-Speed powerful gearbox delivers up to 2400rpm
- 100% backwards compatible with all 18V Battery packs



| | BSS 18OP-0 |
|-------------------------------|--------------------------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | - |
| No. of batteries supplied | 0 |
| Max. torque (Nm) | 22 / 54 / 73 |
| No load speed (rpm) | 0 - 1000 / 0 - 1800 / 0 - 2400 |
| Impact rate (ipm) | 0 - 550 / 0 - 1300 / 0 - 1700 |
| Tool reception | ¼" Hex |
| Weight with battery pack (kg) | 1,38 |
| Supplied in | Gift box |
| Article Number | 4935451631 |
| EAN Code | 4002395140985 |
| | |

18V IMPACT DRIVER

- Compact and lightweight Impact Driver delivering up to 200Nm of torque
- Single Speed gear box providing up to 2900 rpm and 3800 ipm for faster driving
- Lightweight tool at only 1,55Kg with PRO18V 2.0Ah battery
- 1/4" Hex reception
- PRO18V system compatibility







| | BSS 18C2-0 |
|-------------------------------|---------------|
| Battery type | Li-ion |
| No. of batteries supplied | 0 |
| Max. torque (Nm) | 200 |
| No load speed (rpm) | 0 - 2900 |
| Impact rate (ipm) | 0 - 3600 |
| Tool reception | ¼" Hex |
| Weight with battery pack (kg) | 1,55 |
| Supplied in | Gift box |
| Article Number | 4935478633 |
| EAN Code | 4058546348267 |
| | |



BSS 180P

18V 4-MODE SDS-PLUS COMPACT HAMMER

BBH 18C

- Compact and powerful 4-mode SDS plus optimised for fixing applications up to 16mm
- Ergonomic design with pistol grip reduces user fatigue in over head and one handed applications
- Optimised striker mechanism provides maximum productivity in common drill sizes (5.5-10mm)
- Dedicated chiselling mode allows for removal of light materials whilst minimising damage to surrounding material
- Replaceable dust mesh prevents motor damage caused by dust ingress
- Belt clip included for user storage
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BBH 18C-0 | BBH 18CLI-202C | |
|---|---------------|----------------|--|
| Battery type | Li-ion | Li-ion | |
| Battery pack capacity (Ah) | - | 2,0 | |
| No. of batteries supplied | 0 | 2 | |
| Charger supplied | - | 50 min | |
| Max. drilling wood/ steel/ masonry (mm) | 13 / 10 / 16 | 13 / 10 / 16 | |
| Blow energy (EPTA)(J) | 1,5 | 1,5 | |
| No load speed (rpm) | 0 - 1300 | 0 - 1300 | |
| Full load hammer action (bpm) | 0 - 5500 | 0 - 5500 | |
| Weight with battery pack (kg) | 2,5 | 2,5 | |
| Supplied in | Gift box | Kitbox | |
| Article Number | 4935464984 | 4935464985 | |
| EAN Code | 4058546229290 | 4058546229306 | |

18V BRUSHLESS SDS-PLUS ROTARY HAMMER

- L-shape brushless SDS hammer for drilling into concrete up to 26mm
- 2.5 Joule impact energy delivers high performance
- PROFLUX™ Brushless Motor for a better efficiency
- 4-modes for greater versatility
- Hammer action stop for rotary drilling in wood and metal
- Rafter hook for holding the tool on a ladder
- Anti vibration handle for more comfort while working
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool

| | BBH 18BL-0 | BBH 18BL LI-401C | BBH 18BL LI-502C |
|---|---------------|------------------|------------------|
| Battery type | Li-ion | Li-ion | Li-ion |
| Battery pack capacity (Ah) | - | 4,0 | 5,0 |
| No. of batteries supplied | 0 | 1 | 2 |
| Charger supplied | - | 80 min | 90 min |
| Max. drilling wood/ steel/ masonry (mm) | 30 / 13 / 26 | 30 / 13 / 26 | 30 / 13 / 26 |
| Blow energy (EPTA)(J) | 2,5 | 2,5 | 2,5 |
| No load speed (rpm) | 0 - 1400 | 0 - 1400 | 0 - 1400 |
| Full load hammer action (bpm) | 0 - 4800 | 0 - 4800 | 0 - 4800 |
| Weight with battery pack (kg) | - | 3,08 | 3,08 |
| Supplied in | Gift box | Kitbox | Kitbox |
| Article Number | 4935464751 | 4935471045 | 4935464753 |
| EAN Code | 4058546226961 | 4058546286736 | 4058546226985 |





BBH 18BL-0



Δ

BBH 18CLI-202C



BBH 18C-0



18V BRUSHLESS 6-MODE IMPACT WRENCH

- Powerful 300Nm of torque for the toughest jobs
- 6-mode torque selection to cover multiple applications
- Speeds 1,2 & 3 behave like a standard impact wrench increasing in speed and power
- Autostop mode 1 will shut the tool off after impact at 70Nm +- 10%
- Autostop mode 2 will shut the tool off after impact at 120Nm +- 10%
- Autostop mode 3 will shut the tool off after impact at 160Nm +- 10%
- PROFLUX Brushless Motor with Coretek Technologies delivers market leading power and runtime
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool

| | BSS 18C12ZB6-0 |
|-------------------------------|----------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | - |
| No. of batteries supplied | 0 |
| Max. torque (Nm) | 300 |
| No load speed (rpm) | 0 - 3000 |
| Impact rate (ipm) | 0 - 4000 |
| Tool reception | ½" square |
| Weight with battery pack (kg) | 1,92 |
| Supplied in | Gift box |
| Article Number | 4935472012 |
| EAN Code | 4058546324087 |

18V BRUSHLESS IMPACT WRENCH

- ½" brushless impact wrench
- Only 196mm overall length
- PROFLUX™ Brushless Motor Technology allows extremely fast driving applications
- 500Nm maximum torque/ 360Nm in second speed/ 270Nm in first speed
- Delivers 0-3500 impacts per minute for increased productivity
- $\frac{1}{2}$ Square reception and delivered with $\frac{1}{2}$ hex adaptor for screwdriving
- 4-Speed Gearbox, 3-Speeds plus Auto Stop Mode
- Built in triple LED for perfect illumination of the work surface without any shadow effect

| BSS 18C 12ZBL-0 | BSS 18C 12ZBL LI-402C |
|-----------------|---|
| Li-ion | Li-ion |
| - | 4.0 |
| 0 | 2 |
| - | 80 min |
| 500 | 500 |
| 1400 - 2750 | 1400 - 2750 |
| 0 - 3500 | 0 - 3500 |
| ½" square | 1⁄2" square |
| 2,3 | 3,02 |
| Gift box | Kitbox |
| 4935459426 | 4935459427 |
| 4058546010874 | 4058546010881 |
| | Li-ion - 0 - 500 1400 - 2750 0 - 3500 % [*] square 2,3 Gift box 4935459426 |

BSS 18C12ZB6





BSS 18C 12Z BL





18V BRUSHLESS 6 MODE HIGH TORQUE IMPACT WRENCH

- Industry leading power delivers up to 1550Nm of fastening torque
- 6 Mode torque selection gives users ultimate control through all applications
- 2100Nm of maximum break away torque for increased power on fastener removal
- Speeds 1, 2 & 3 increase in speed and power subject to application and fastener size
- AUTOSTOP mode 1 shuts to the tool off after impact at 200Nm +-10%
- AUTOSTOP mode 2 shuts to the tool off after impact at 790Nm +-10%
- AUTOSTOP mode 3 shuts to the tool off after impact at 1230Nm +-10% • 1/2" Square reception





| BSS 18HTF12B6-0 |
|-----------------|
| Li-ion |
| |
| 0 |
| • |
| 1550 |
| 0-1800 |
| 0-2300 |
| ½" square |
| 3,6 |
| Gift box |
| 4935472245 |
| 4058546326418 |
| |





18V SUB COMPACT BRUSHLESS IMPACT WRENCH

- Compact and Powerful Sub Compact brushless motor technology delivers up to 280Nm of torque
- 3 Speed gear box and Autostop provides ultimate control through all applications
- Sub Compact design provides ultimate user productivity and ergonomics
- Lightweight tool at only 1.4Kg with PRO18V 2.0Ah pack
- Only 113mm in length allows tool to fit into tight spaces
 AUTOSTOP shuts tool off after impact to prevent fastener damage
- 1/2" Square reception
- PRO18V system compatibility



| BSS 18S12BL-0 |
|---------------|
| Li-ion |
| · |
| 0 |
| - |
| 280 |
| 0-2800 |
| 0-3800 |
| ½" square |
| Gift box |
| 4935472278 |
| 4058546339241 |
| |



- Only 203mm overall length
- 360Nm maximum torque
- Delivers 0-3200 impacts per minute for increased productivity
- Industrial metal gearbox and gears for extended life
- 1/2" Square reception and delivered with 1/4" hex adaptor for screwdriving
- · Built in Triple LED for perfect illumination of the work surface without any shadow effect








| | BSS 18C 12Z-0 | BSS 18C 12Z Li-402C |
|-------------------------------|---------------|---------------------|
| Battery type | Li-ion | Li-ion |
| Battery pack capacity (Ah) | - | 4,0 |
| No. of batteries supplied | 0 | 2 |
| Charger supplied | - | 80 min |
| Max. torque (Nm) | 360 | 360 |
| No load speed (rpm) | 0 - 2900 | 0 - 2900 |
| Impact rate (ipm) | 0 - 3200 | 0 - 3200 |
| Tool reception | ½" square | ½" square |
| Weight with battery pack (kg) | 2,3 | 2,3 |
| Supplied in | Gift box | Kitbox |
| Article Number | 4935446449 | 4935446456 |
| EAN Code | 4002395136247 | 4002395136254 |





BSS 18S12BL

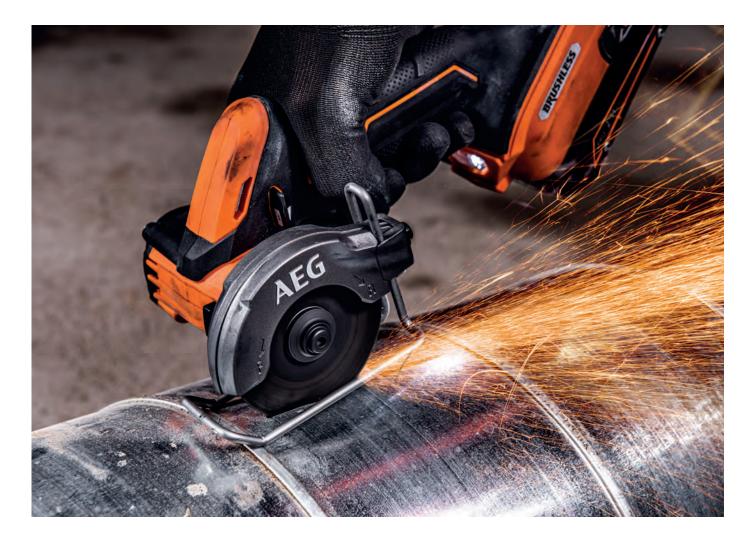

18V SUB COMPACT BRUSHLESS MULTI-MATERIAL CUT OFF TOOL

BMMS 18SBL

- Compact and Powerful Sub Compact brushless motor technology delivers up to 20.000 rpm
- Ergonomically designed for best control and one-handed use
- Lightweight and compact cut -off tool, weighing only 1.2kg with 2Ah battery pack
- 76mm blade diameter providing 16mm depth of cut
- Forward/reverse blade rotational selection and easy to adjust guard
- LED light provides a bright illumination of the work surface
- Capability to cut metal, masonary, Plastic and plasterboard materials
- PRO18V system compatibility



| | BMMS 18SBL-0 | |
|-------------------------------|---------------|--|
| Battery type | Li-ion | |
| Battery pack capacity (Ah) | - | |
| No. of batteries supplied | 0 | |
| Charger supplied | - | |
| Arbor size (mm) | 10 | |
| Blade diameter (mm) | 76 | |
| Blade speed (rpm) | 20.000 | |
| Max. cutting capacity (mm) | 16 | |
| Weight with battery pack (kg) | 1,2 | |
| Supplied in | Gift box | |
| Article Number | 4935472280 | |
| EAN Code | 4058546339265 | |
| | | |



NEW

18V 125MM BRUSHLESS ANGLE GRINDER WITH PADDLE SWITCH

BEWS 18-125RI P)

- Powerful 18V PROFLUX™ Brushless Motor with 11.000rpm for faster cutting
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool
- LED warning light, to indicate overload protection
- Built-in fuel gauge on the battery
- Best safety with disc break and anti kick-back function
- AVS side handle for more safety and comfort
- Supplied with a FIXTEC flange nut and keyless grinding guard for faster adjustment
- CORETEK™ Intelligent Electronics constantly monitors the communication between the PRO Li-ion battery pack and the PROFLUX™ brushless motor to deliver constant speed and power



| BEWS 18-125BLPX-0 | BEWS 18-125BLPX-602C |
|-------------------|--|
| Li-ion | Li-ion |
| - | 6,0 |
| 0 | 2 |
| - | 85 min |
| 11.000 | 11.000 |
| 26 | 26 |
| M 14 | M 14 |
| 2,5 | 2,9 |
| Gift box | Kitbox |
| 4935464419 | 4935464422 |
| 4058546223649 | 4058546223670 |
| | - 0 - 11.000 26 M 14 2,5 Gift box 4935464419 |



18V 115MM BRUSHLESS ANGLE GRINDER WITH PADDLE SWITCH

- Powerful 18V PROFLUX™ Brushless Motor with 11.000rpm for faster cutting
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durabilty of
- battery and tool
- LED warning light, to indicate overload protection
- Built-in fuel gauge on the battery
- Best safety with disc break and anti kick-back function.
- AVS side handle for more safety and comfort
- Supplied with a FIXTEC flange nut and keyless grinding guard for faster adjustment
- CORETEK™ Intelligent Electronics constantly monitors the communication between the PRO Li-ion battery pack and the PROFLUX™ brushless motor to deliver constant speed and power

| LPX-602C |
|----------|
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| 87 |
| |





BEWS 18-115BLPX



18V 125MM BRUSHLESS ANGLE GRINDER WITH SLIDE SWITCH

BEWS 18-125BL

• Powerful 18V PROFLUX™ Brushless Motor with 11.000rpm for faster cutting

- LED warning light, to indicate overload protection
- Built-in fuel gauge on the battery
- CORETEK™ Intelligent Electronics constantly monitors the communication between the PRO Li-ion battery pack and
- the $\mathsf{PROFLUX}^{\mathsf{M}}$ brushless motor to deliver constant speed and power
- Keyless grinding guard for faster adjustment
- Line Lock Out feature for more safety
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BEWS 18-125BL-0 | BEWS 18-125BL-502C |
|-------------------------------|-----------------|--------------------|
| Battery type | Li-ion | Li-ion |
| Battery pack capacity (Ah) | - | 5,0 |
| No. of batteries supplied | 0 | 2 |
| Charger supplied | - | 90 min |
| No load speed (rpm) | 11.000 | 11.000 |
| Max. cutting depth (mm) | 26 | 26 |
| Spindle size | M14 | M14 |
| Weight with battery pack (kg) | 2,4 | 2,6 |
| Supplied in | Gift box | Kitbox |
| Article Number | 4935464414 | 4935464417 |
| EAN Code | 4058546223595 | 4058546223625 |





18V 115MM BRUSHLESS ANGLE GRINDER WITH SLIDE SWITCH

- Powerful 18V PROFLUX™ Brushless Motor with 11.000rpm for faster cutting
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of
- battery and tool
- LED warning light, to indicate overload protection
- Built-in fuel gauge on the battery
- CORETEK™ Intelligent Electronics constantly monitors the communication between the PRO Li-ion battery pack and the PROFLUX™ brushless motor to deliver constant speed and power
- Keyless grinding guard for faster adjustment



| | BEWS 18-115BL-0 | BEWS 18-115BL-502C |
|-------------------------------|-----------------|--------------------|
| | BEWS 10-TISBL-0 | BEWS 10-113BL-502C |
| Battery type | Li-ion | Li-ion |
| Battery pack capacity (Ah) | - | 5,0 |
| No. of batteries supplied | 0 | 2 |
| Charger supplied | - | 90 min |
| No load speed (rpm) | 11.000 | 11.000 |
| Max. cutting depth (mm) | 21 | 21 |
| Spindle size | M14 | M14 |
| Weight with battery pack (kg) | 2,4 | 2,4 |
| Supplied in | Gift box | Kitbox |
| Article Number | 4935464415 | 4935464418 |
| EAN Code | 4058546223601 | 4058546223632 |





18V BRUSHLESS ANGLE GRINDER

BEWS 18-230BL

- The first 18V dual battery 230mm Grinder on the market
- Dual 18V battery system but one battery is enough to operate
- Brushless motor enables up to 5.500rpm
- Best safety with disc break and anti kick-back function
- Perfect handling with the rotating back handle with anti-vibration system
- LED warning for overload and line lock-out
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BEWS 18-230BL-0 | BEWS 18-230BL LI-402B |
|-------------------------------|-----------------|-----------------------|
| Battery type | Li-ion | Li-ion |
| Battery pack capacity (Ah) | - | 4.0 |
| No. of batteries supplied | 0 | 2 |
| Charger supplied | - | 80 min |
| No load speed (rpm) | 5500 | 5500 |
| Max. cutting depth (mm) | 68 | 68 |
| Spindle size | M14 | M14 |
| Weight with battery pack (kg) | 7,2 | 5,5 |
| Supplied in | Gift box | Tool bag |
| Article Number | 4935459735 | 4935464670 |
| EAN Code | 4058546029074 | 4058546226152 |





18V CIRCULAR SAW

- Light weight, compact and well balanced circular saw
- Fast cutting speed of 3700 RPM
- Metal upper guard and aluminium base plate for durability
- Safety trigger lock prevents accidental start up
- Spindle lock for fast blade change
- 50°bevel capacity
- PRO18V system compatibility



| BKS 18C2-0 |
|---------------|
| Li-ion |
| 0 |
| 20 |
| 3700 |
| 25,5 |
| 52 |
| 3,52 |
| Gift box |
| 4935478635 |
| 4058546348281 |
| - |



18V BRUSHLESS CIRCULAR SAW

- PROFLUX™ Brushless Motor delivers high speed and high power
- Ultra compact circular saw (341mm OAL)
- Improved visibility with LED light and dust blower
- Magnesium guard and die cast shoe keep the tool extremely light
- Supplied with a 190mm TCT blade with 24 carbide teeth for a perfectly clean and fast cut
- Electronic motor brake, saw blade stops within seconds
- Lock off switch for safety
- Spindle lock for fast blade changing
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool

| | BKS 18BL-0 | |
|-------------------------------|---------------|--|
| Battery type | Li-ion | |
| No. of batteries supplied | 0 | |
| Blade diameter (mm) | 190 | |
| Bevel capacity (°) | 56° | |
| Max. cutting depth 45° (mm) | 45 | |
| Max. cutting depth 90° (mm) | 64 | |
| No load speed (rpm) | 3800 | |
| Arbor size (mm) | 30 | |
| Weight with battery pack (kg) | 3,6 | |
| Supplied in | Gift box | |
| Article Number | 4935451537 | |
| EAN Code | 4002395146345 | |





BKS 18C2

18V BRUSHLESS RECIPROCATING SAW

BUS 18BL

- PROFLUX™ Brushless Motor delivers up to 3200spm
- Orbital function on board for cutting without pushing, perfect for overhead work
- 28mm stroke length for the fastest cutting performance on the market
- Quick release blade system, accepts all standard recip saw blades
- Easy and quick adjustable shoe with tool free system
- Fuel gauge on board, always be aware about the remaining power
- LED enables perfect view on the work piece
- Rafter hook for an easy carriage when you are on a ladder
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BUS 18BL-0 |
|---|----------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | • |
| No. of batteries supplied | 0 |
| No load stroke rate (spm) | 3200 |
| Stroke length (mm) | 28 |
| Max. cutting capacity wood/ steel/ plastic (mm) | 255 / 20 / 130 |
| Weight with battery pack (kg) | 3,6 |
| Supplied in | Gift box |
| Article Number | 4935464032 |
| EAN Code | 4058546219772 |



BUS 18CBL

18V BRUSHLESS COMPACT RECIPROCATING SAW

- · Compact and powerful one handed design allows the user to complete heavy duty applications in confined spaces
- Orbital cutting action easily pushes blade through material for fast and aggressive cuts
- Overmoulded motor housing provides maximum grip and safety for two-handed applications
- 19mm stroke length enables the removal of maximum amount of material with every cut
- 3000spm delivers the speed and accuracy required when cutting studs and sheet material
- Quick release blade system for convenient blade change
- PROFLUX™ Brushless Motor with Coretek Technologies delivers market leading power and runtime
- PRO18V system compatibility



| | BUS 18CBL-0 |
|-------------------------------|---------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | • |
| No. of batteries supplied | 0 |
| No load stroke rate (spm) | 0 - 3000 |
| Stroke length (mm) | 19 |
| Weight with battery pack (kg) | 2,81 |
| Supplied in | Gift box |
| Article Number | 4935471984 |
| EAN Code | 4058546298838 |
| | |



18V RECIPROCATING SAW

BUS 18

- Pendulum action for increased performance
- 3600 strokes per minute and 19mm stroke length for fast cutting applications
- Robust bladeclamp for demolition applicationsFIXTEC for fast and easy keyless blade change
- Adjustable shoe
- Saw blade can be turned 180° for various applications
- Variable speed trigger
- Soft-grip
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of
- battery and tool
- Supplied with 2 blades



| BUS 18-0 | |
|---------------|---|
| Li-ion | |
| • | |
| 0 | |
| 0 - 3600 | |
| 19 | |
| 3,5 | |
| Gift box | |
| 4935431370 | |
| 4002395132805 | |
| | Li-ion - 0 0 - 3600 19 3,5 Gift box 4935431370 |



18V BRUSHLESS SLIDE MITRE SAW

- 18V brushless motor designed for superior runtime and performance
- Dual 18V system, for longer runtime
- Dual bevel cut
- Clamp system, for a safer cut
- LED for perfect view on the cutting line and adjustable laser for quick and precise cut
- Blade depth adjustment, Allows for trenching applications
- 254mm Blade, providing fantastic cutting capacities up to 90mm x 305mm
- Only 15,5kg, for easy transportation on the jobsite
- Supplied with 48 tooth blade
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool

| | BPS18-254BL-0 |
|---|---------------|
| Battery type | Li-ion |
| No. of batteries supplied | 0 |
| Blade diameter (mm) | 254 |
| Max. cutting depth (mm) | 90 |
| No load speed (rpm) | 3900 |
| Max. cutting capacity 0 mitre/ 45 bevel [mm] | 39 x 305 |
| Max. cutting capacity 45° mitre/ 45° bevel (mm) | 39 x 215 |
| Max. cutting depth 45° (mm) | 43 |
| Mitre capacity left (°) | 45 |
| Mitre capacity right (°) | 45 |
| LED | Yes |
| Weight with battery pack (kg) | 16,3 |
| Supplied in | Gift box |
| Article Number | 4935459336 |
| EAN Code | 4058546009977 |







18V HEAVY DUTY JIGSAW

- Pendulum action for increased cutting performance •
- Metal gearbox for extended durability
- Professional, die-cast aluminium base plate
- Patented FIXTEC system for fast keyless blade change
- Variable speed trigger
- Ergonomic soft-grip for comfortable use • Electronic motor brake
- Supplied with a plastic shoe cover, an anti splintering device and 2 blades



| | BST 18X-0 |
|--------------------------------------|---------------|
| Battery type | Li-ion |
| No. of batteries supplied | 0 |
| Stroke length (mm) | 26 |
| No load stroke rate (spm) | 0 - 2050 |
| Bevel capacity (°) | 45 |
| Max. cutting capacity soft wood (mm) | 80 |
| Weight with battery pack (kg) | 3,5 |
| Supplied in | Gift box |
| Article Number | 4935413130 |
| EAN Code | 4002395197460 |

18V BRUSHLESS JIGSAW

- Powerful 18V PROFLUX™ Brushless Motor with 3500spm
- Lock on button for usage like a body grip jigsaw
- Patented FIXTEC system for fast keyless blade change and bevel adjustment with snap-in at 0° and 45°
- Variable speed with 5 positions, soft start and constant speed under load
- Adjustable chipping blower to the front and rear
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool







| | BST 18BLX-0 | BST 18BLX LI-402C |
|--------------------------------------|---------------|-------------------|
| Battery type | Li-ion | Li-ion |
| Battery pack capacity (Ah) | - | 4,0 |
| No. of batteries supplied | 0 | 2 |
| Charger supplied | - | 30 min |
| Stroke length (mm) | 25,4 | 25,4 |
| No load stroke rate (spm) | 3500 | 3500 |
| Bevel capacity (°) | 45 | 45 |
| Max. cutting capacity soft wood (mm) | 135 | 135 |
| Max. cutting capacity aluminium (mm) | 20 | 20 |
| Weight with battery pack (kg) | 2,46 | 2,46 |
| Supplied in | Gift box | Kitbox |
| Article Number | 4935459654 | 4935459656 |
| EAN Code | 4058546028268 | 4058546028282 |





BST 18X

18V BRUSHLESS CHAINSAW

ACS18B30

- High-performance brushless motor for higher productivity
- 30cm Oregon® bar runs at 10m/s for best performance
- Mechanical and electronic motor brake for added safety
- Best balance for comfortable use in any orientation
- Large, easy-fill chain oil reservoir for automatic chain lubrication
- Tooled chain tensioning adjustments with on board tool storage
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | ACS18B30-0 | |
|----------------------------|---------------|--|
| Battery type | Li-ion | |
| Battery pack capacity (Ah) | - | |
| No. of batteries supplied | 0 | |
| Charger supplied | - | |
| Chain bar length (cm) | 30 | |
| Chain speed (m/s) | 10 | |
| Supplied in | Gift box | |
| Article Number | 4935471337 | |
| EAN Code | 4058546289652 | |



BHO 18BL

18V BRUSHLESS PLANER

- Powerful brushless motor delivers up to 16000rpm to achieve supreme surface finish across a range of materials
- 82mm reversable cutting blade with 58mm ejection ports maximises material removal
- Patented depth adjustment feature allows user to retract the planer shoe up to -2mm giving perfectly balanced and precise chamfering capability
- · Adjustable cutting depth up to 2mm allows the user to accurally control the amount of material removed with each pass
- Left or right material ejection port to suit user comfort and application
- A lockable kickstand on the base of the tool protects material from accidental damage
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BHO18 BL-0 | |
|-------------------------------|---------------|--|
| Battery type | Li-ion | |
| No. of batteries supplied | 0 | |
| No load speed (rpm) | 14.300 | |
| Planing depth (mm) | 0 - 2,0 | |
| Planing width (mm) | 82 | |
| Rebate depth (mm) | 0 - 12,5 | |
| Weight with battery pack (kg) | 3,32 | |
| Supplied in | Gift box | |
| Article Number | 4935464988 | |
| EAN Code | 4058546229337 | |



18V BRUSHLESS TRIM ROUTER

- One-hand cordless 18V brushless trim router
- Up to 25.000rpm for rounding all types of wood
- Collet size 6mm for the most common accessories on the market
- Spindle Lock enables quick and simple router bit changes
- Built in speed dial, for adjusting the speed for different materials
- Micro adjust dial: For easily adjusting the router depth to the specific material and application
- Magnesium guard for more durability
- Ergonomic slim grip for maximum comfort during extended use
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BOF 18BL-0 |
|-------------------------------|---|
| Battery type | Li-ion |
| No. of batteries supplied | 0 |
| Collet capacity (mm) | 6 |
| Fuel gauge | Yes |
| No load speed (rpm) | 17.000 to 25.000 |
| Plunge capacity (mm) | 32 |
| Speed settings | 7 |
| Weight with battery pack (kg) | 2,31 |
| Supplied in | Gift box |
| Standard equipment | Edge Guide, 6mm Bit + 6,35mm, Round and Square base, wrench |
| Article Number | 4935459584 |
| EAN Code | 4058546027568 |



BHBS 18-75BL

18V BRUSHLESS BELT SANDER

- PROFLUX™ Brushless Motor for more power, more runtime and a more compact tool
- Compct and lightweight Sander
- Variable speed dial to match the speed of the sander with the specific application
- Lock on button for comfortable operating
- Integrated dust absorption (DEK 26 system)
- Accepts up to 457mm belt length and 75mm belt width
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BHBS18-75BL-0 | |
|-------------------------------|---------------|--|
| Battery type | Li-ion | |
| No. of batteries supplied | 0 | |
| Belt length (mm) | 457 | |
| Belt width (mm) | 75 | |
| No load speed (m/min) | 135 - 300 | |
| No load speed (rpm) | 11.000 | |
| Speed settings | 6 | |
| Weight with battery pack (kg) | - | |
| Supplied in | Kitbox | |
| Article Number | 4935459582 | |
| EAN Code | 4058546027544 | |
| | | |



BOF 18BL

18V ORBITAL SANDER

BEX18-125

- Powerful 18V motor 125mm random orbital sander •
- Ideal for working in confined spaces and overhead
- Variable speed for optimum control
- Convenient hook & loop paper fastening
- Very efficient dust extraction, over 8 holes in the base plate
- Dust extraction, with dust bag or absorption system
- Micro texture grip for perfect handling
- Supplied with dust bag and sanding paper
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BEX18-125-0 | |
|-------------------------------|-----------------|--|
| Battery type | Li-ion | |
| Battery pack capacity (Ah) | • | |
| No. of batteries supplied | 0 | |
| Charger supplied | • | |
| No load speed (rpm) | 7000 - 11.000 | |
| Oscillation rate (opm) | 14.000 - 22.000 | |
| Oscillation diameter (mm) | 2,4 | |
| Sanding pad size (mm) | 125 | |
| Weight with battery pack (kg) | • | |
| Supplied in | Gift box | |
| Article Number | 4935451086 | |
| EAN Code | 4002395811120 | |



18V MULTI-TOOL

- Gives more power and more runtime whilst keeping the advantage of cordless portability.
- Tool free interchangeable heads to easily switch between a wide range of applications
- Large 2-finger switch with adjustable speed
- Range of one-handed applications
- Optimum power to weight ratio
- LED for work place illumination
- Built in fuel gauge
- Slim handle design for perfect ergonomics and better vibration absorbtion
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool

| | OMNI 18C LI-202BKIT1X | OMNI 18C - 0KIT1X | |
|-----------------------------------|-----------------------|-------------------|--|
| Battery type | Li-ion | Li-ion | |
| Battery pack capacity (Ah) | 2.0 | - | |
| Charger supplied | 30 min | - | |
| Fuel gauge | Yes | Yes | |
| LED | Yes | Yes | |
| No. of batteries supplied | 2 | 0 | |
| Oscillation angle left/ right (°) | 2 | 2 | |
| Oscillation rate (opm) | 20.000 | 20.000 | |
| Supplied in | Gift box | Gift box | |
| Weight with battery pack (kg) | 1,15 | 1,15 | |
| Article Number | 4935446705 | 4935446706 | |
| EAN Code | 4002395136438 | 4002395136421 | |







OMNI 18C

18V BRUSHLESS DRYWALL SCREWDRIVER

Small lightweight drywall screwdriver with a length of 266mm/ 418mm with collated attachment

- Powerful motor with 5000rpm
- Push drive function for improved runtime and comfort
- Incredible runtime up to 3000 screws with a L1850R Battery
- Fine adjustment nose cone for setting desired countersink levels in single screw applications +/-5 mm
- Quick release $\rlap{\sc M}''$ Hex chuck allows for easy bit change
- Compatible with AEG PROLITHIUMION[™] battery technology featuring overload protection for maximum durability of battery and tool
- Belt clip to hang your tool quickly and easily



| | BTS 18BL-0 | BTS18BL-0KIT1 |
|-------------------------------|---------------|---------------------|
| Battery type | Li-ion | Li-ion |
| Battery pack capacity (Ah) | - | - |
| No. of batteries supplied | 0 | 0 |
| Charger supplied | - | - |
| Tool reception | 14" Hex | ¼" Hex |
| Max. torque (Nm) | 5 | 5 |
| No load speed (rpm) | 5000 | 5000 |
| Standard equipment | - | Collated attachment |
| Weight with battery pack (kg) | 1,87 | 1,87 |
| Supplied in | Gift box | Tool bag |
| Wood screws to (mm) | 25 - 55 | 25 - 55 |
| Article Number | 4935459620 | 4935459621 |
| EAN Code | 4058546027926 | 4058546027933 |

18V 18 GA BRUSHLESS NAIL GUN

- Vacuum Drive Technology provides cordless convenience, eliminating the need for a noisy compressor, bulky air hose or expensive gas cartridges
- Fires 18 Gauge (1.2mm) nails from 15,9 to 55mm long
- 2 firing modes, full sequential mode for precision and contact actuation mode for rapid fastening
- Grip-Light technology engages twin LEDs by grasping the handle
- Tool-less depth and power adjustment helps to protect work surface and allows proper setting of nail heads
- Dry-fire lockout prevents the tool working without nails loaded
- Tool free release lever to remove jammed nails
- Belt hook mounts left or right side for added convenience
- Includes 2 non marking rubber nose caps to prevent damage to work surface
- Up to 1450 Nails runtime using a L1840R battery pack
- Runtime can vary by tool, battery and application
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool







| | B18N18-0 | |
|-------------------------------|---------------|--|
| Battery type | Li-ion | |
| Battery pack capacity (Ah) | - | |
| No. of batteries supplied | 0 | |
| Charger supplied | - | |
| Magazine capacity | 105 | |
| Nail type (mm) | 1,2 | |
| Cycle rate (h) | 2/sec | |
| Weight with battery pack (kg) | 3,6 | |
| Supplied in | Kitbox | |
| Article Number | 4935451535 | |
| EAN Code | 4002395146321 | |



BTS 18BL

18V 16 GA BRUSHLESS NAIL GUN

- Vacuum Drive Technology provides cordless convenience, eliminating the need for a noisy compressor, bulky air hose or expensive gas cartridges
- Fires 16 Gauge (1.6mm) nails from 19 to 65mm long
- 2 firing modes, full sequential mode for precision and contact actuation mode for rapid fastening
- Grip-Light technology engages LED by grasping the handle
- Tool-less depth and power adjustment helps to protect work surface and allows proper setting of nail heads
- Dry-fire lockout prevents the tool working without nails loaded
- Tool free release lever to remove jammed nails
- Belt hook mounts on left or right side for added convenience
- Includes 2 non marking rubber nose caps to prevent damage to work surface

| | B16N18-0 |
|-------------------------------|---------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | • |
| No. of batteries supplied | 0 |
| Charger supplied | |
| Magazine capacity | 105 |
| Nail type (mm) | 1,6 |
| Cycle rate (h) | 2/Sec |
| Weight with battery pack (kg) | 3,0 |
| Supplied in | Kitbox |
| Article Number | 4935451533 |
| EAN Code | 4002395146307 |







18V CAULK GUN WITH 310ML CARTRIDGE CAPACITY

BKP 18C2

- 4000N of force even for high velocity material
- Anti-drip feature prevents unwanted dripping when trigger is released
- Speed dial with 7 speed settings for optimal speed
- Integrated rafter hook for storage when tool not in use
- Spring loaded cartridge holder for easy setup
- PRO18V system compatibility



| BKP 18C2-310-0 |
|----------------|
| Li-ion |
| 0 |
| 4000 |
| 2 |
| Gift box |
| 4935478634 |
| 4058546348274 |
| |



B16N18

18V CAULK GUN WITH 310ML CARTRIDGE CAPACITY

BKP18C

- 4500Nm of force even for high viscosity material
- Anti-drip feature prevents unwanted dripping when trigger is released
- Speed dial with 6 speed settings for optimal speed
- Belt clip for easy storage during working
- Spring loaded cartridge holder for easy setup
- On board fuel gauge on the battery
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| Li-ion O | Li-ion 1 |
|---------------|---------------|
| - | 1 |
| | |
| 2,9 | 2,9 |
| Gift box | Tool bag |
| 4935471246 | 4935471247 |
| 4058546288747 | 4058546288754 |
| | 4935471246 |



DUAL 18V BRUSHLESS COMPRESSOR

- Dual 18V for longer runtime
- 3.8L tank with roll cage for portability and protection
- Pressure regulater knob for accurate pressure adjustments with on board pressure gauge
- Quick connect coupler for easy compatibility
- Oil-free pump design and up to 30.8L/min air flow
- Enough runtime to fire 1,200 brad nails per charge
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BK18-38BL-0 | |
|---------------------|---------------|--|
| Battery supplied | - | |
| Power (kW) | 0,4 | |
| Tank capacity (I) | 3,8 | |
| Max. pressure (bar) | 8,3 | |
| Air flow (I/min) | 30,8 | |
| Supplied in | Gift box | |
| Article Number | 4935471201 | |
| EAN Code | 4058546288297 | |



BK18-38BL

18V HIGH PRESSURE INFLATOR

BK 180

- 18V high pressure inflator suitable for inflating car, light truck and compact equipment tires
- Delivers up to 10.3 Bar / 150 Psi
- Auto mode allows users to pre-select pressure for accurate inflation. Inflator automatically stops when pre-selected pressure is achieved
- Supplied with a sports ball needle, presta valve and high pressure tapered nozzle
- Illuminated LCD displays pressure in BAR & PSi
- Onboard nozzle and hose storage, easily stores hose and attachment. Comes with a plastic locking chuck
- PRO18V system compatibility



| Li-ion 0 23 l/min |
|-------------------------|
| |
| 23 l/min |
| |
| 14 l/min |
| 10,3 / 150 |
| Gift box |
| 1,47 |
| 4935478457 |
| 4058546346485 |
| |



PRO) 18v

BRUSHED INFLATOR

comes with a highly efficient pump and a plastic locking chuck.

ILLUMINATED LCD SCREEN

Displays the pressure both in Bar and PSI for varying user preferences.

AUTO-FILL HIGH PRESSURE INFLATOR

Used to inflate car, truck and van tyres for both commercial and domestic use.

18V HIGH PRESSURE INFLATOR

BK18C-0

NEW

Nozzles Included 1. Presta valve 2. High pressure tapered nozzle 3. Sports ball needle *Hose length = <u>520mm + 30mm chuck*</u>

AEG

FIL

30



18V DAB + DIGITAL JOBSITE RADIO

- Ultra compact AC/DC jobsite Radio 1,1Kg
- 150mm width only, fits on almost all window frames
- New PROLITHIUMION™ 5.0Ah provides over 20 hours runtime
- Back light display allows perfect visibility
- 10 channel pre set for FM/ 10 channel pre set for DAB+
- DAB+ compatible
- Aux Cable Connector (Ipod, Phone)
- Water and debris resistant to withstand tough conditions on the jobsite
 Accepts all 12V stem packs and all PRO18V packs
- 220V-240V 2 pin EU plug transformer included



| | BR 1218C-0 | |
|-------------------------------|---------------|--|
| Battery type | Li-ion | |
| No. of batteries supplied | 0 | |
| Weight with battery pack (kg) | 1,93 | |
| Supplied in | Gift box | |
| Article Number | 4935451539 | |
| EAN Code | 4002395146369 | |



18V HANDHELD DUST EXTRACTOR

- Powerful suction, optimised for quick clean ups
- One-motion detachable tank for easy emptying
- Fully transparent tank to show when emptying is required
- Lock on/off power switch
- Over mould for user comfort
- Compact and lightweight
- Washable pre-filter for superior filtration
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BHSS 18-0 |
|-------------------------------|---------------------|
| | |
| Battery type | Li-ion |
| No. of batteries supplied | 0 |
| Sealed Suction [kPa] | 5,4 |
| Air flow (I/min) | 1068 |
| Tank capacity (I) | 0,67 |
| Filter type | Washable pre filter |
| Weight with battery pack (kg) | 1,5 |
| Supplied in | Gift box |
| Article Number | 4935471983 |
| EAN Code | 4058546298821 |



BR 1218C

18V JOBSITE BLOWER

3GE 18C2

- Compact & Powerful blower for jobsite clean up
- Trigger actuated variable speed
- Lock-on switch ensures user comfort during use
- Reinforced motor housing for durability
- Comes with an additional nozzle piece for inflating/deflating airbed and other inflatables
- PRO18V system compatibility



| | BGE 18C2-0 | |
|-------------------------------|---------------|--|
| Battery type | Li-ion | |
| No. of batteries supplied | 0 | |
| No load speed (rpm) | 18,000 | |
| Air volume (m³/min) | 2,8 | |
| Air speed (km/h) | 257 | |
| Supplied in | Gift box | |
| Weight with battery pack (kg) | 1,62 | |
| Article Number | 4935478458 | |
| EAN Code | 4058546346492 | |
| | | |





18V JOBSITE BLOWER

- Compact & powerful blower for jobsite clean up
- 3-speed setting dial
- Reinforced housing for durability
- Trigger actuated variable speed
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BGE18-0 |
|-------------------------------|------------------------|
| Battery type | Li-ion |
| No. of batteries supplied | 0 |
| No load speed (rpm) | 18 700 / 1300 / 11 500 |
| Air volume (m³/min) | 2,9 |
| Supplied in | Gift box |
| Weight with battery pack (kg) | 1,94 |
| Article Number | 4935464986 |
| EAN Code | 4058546229313 |
| | |



BGE18

18V USB CHARGER

BHJ18C

- Compatible with all PRO18V AEG batteries
- Makes it possible to run the 12V Heated Gear from a PRO18V AEG battery
- USB charging port for MP3 player, mobile phone, digital camera, GPS
- Belt clip for maximum comfortOn/Off switch for USB port
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BHJ18C-0 | |
|-------------------------------|-------------------|--|
| Battery type | Li-ion | |
| No. of batteries supplied | 0 | |
| Weight with battery pack (kg) | 0,71 | |
| Supplied in | Blister packaging | |
| Article Number | 4935459335 | |
| EAN Code | 4058546009960 | |



- High performance torch light, LED's with rotary encoder technology automatically adjusts lighting in high heat conditions
- Handheld design with belt clip makes this unit extremely portable
- Dimming function allows for correct light/concentration level per application
- Rotating head allows for multi directional concentrated light source
- 12V car adaptor included
- Up to 32hrs runtime on low setting from 5.0Ah Battery pack
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool







| | BTL18-0 |
|-------------------------------|---------------|
| Battery type | Li-ion |
| No. of batteries supplied | 0 |
| Bulb type | LED |
| IP protection class | IP24 |
| Lumens | 2100 |
| Supplied in | Gift box |
| Weight with battery pack (kg) | 2,0 |
| Article Number | 4935459659 |
| EAN Code | 4058546028312 |



18V JOBSITE PANEL LIGHT

BPL18

- High performance LED panels with rotary encoder technology automatically adjusts lighting in high heat conditions
- Hybrid design makes this unit versatile for worksite, camping or workshop
- Dimming function allows for correct light level per application
- Multiple hanging positions
- Folding panels enable multi directional lighting capabilities
- Up to 20hrs runtime on low setting from 5.0Ah Battery pack
- Compatible with AEG PROLITHIUMION[™] battery technology featuring overload protection for maximum durability of battery and tool



| | BPL18-0 |
|-------------------------------|--------------------|
| Battery type | Li-ion |
| No. of batteries supplied | 0 |
| Bulb type | LED |
| IP protection class | IP20 |
| Lumens | 2500 |
| Standard equipment | 2,5m AC power cord |
| Supplied in | Gift box |
| Weight with battery pack (kg) | 2,7 |
| Article Number | 4935459661 |
| EAN Code | 4058546028336 |



- AEG compact and lightweight 18V torch light
- High quality LED, which provides 135 lumens
- Swivel head rotates up to 180° which allows the user to direct the light beam at the desired work area
- Rubberized soft grip increases comfort on the job site
- Belt clip mountable
- Extensive runtime up to 25hrs with a 18V 4,0Ah Pro Lithium Ion Battery
- Compatible with all PROLITHIUMION™ 18V batteries







| FL18-0 |
|---------------|
| Li-ion |
| 0 |
| LED |
| IP20 |
| 135 |
| Gift box |
| 1,5 |
| 4932451164 |
| 4002395138333 |
| - |



18V 9,0 AH PROLITHIUM-ION™ HD BATTERY

- The new HD battery technology offers a higher performance level on high demand applications
- AEG Powertools PROLITHIUMION™ technology provides the optimum power battery platform with triple protection
- Thermal overload protection: Protects the battery if temperature gets too high
- Current overload protection: Shuts down the pack in order to protect battery and tool from high current draw
- Individual cell monitoring: Protects individual cells from over discharging •
- Backwards compatible with all AEG 18V tools
- On-board battery fuel gauge helps the user to maximize their battery run-time efficiency
- New HD battery technology, the pack remains cool no matter the application - less risk of overheating
- 9,0Ah power for working all day long without having to recharge your battery. Up to 2x the runtime of our 5,0Ah battery
- Heavy duty pack construction for optimal resistance to jobsite abuses

| | L1890RHD | |
|----------------------------|---------------|--|
| Battery type | Li-ion | |
| Battery pack capacity (Ah) | 9,0 | |
| Voltage (V) | 18 | |
| Weight (kg) | 1,2 | |
| Supplied in | Gift box | |
| Article Number | 4932464231 | |
| EAN Code | 4058546221768 | |

18V 6,0 AH PROLITHIUM-ION™ HD BATTERY

- The new HD battery technology offers a higher performance level on high demand applications
- AEG Powertools PROLITHIUMION™ technology provides the optimum power battery platform with triple protection
- Thermal overload protection: Protects the battery if temperature gets too high
- Current overload protection: Shuts down the pack in order to protect battery and tool from high current draw
- Individual cell monitoring: Protects individual cells from over discharging
- Backwards compatible with all AEG 18V tools •
- On-board battery fuel gauge helps the user to maximize their battery run-time efficiency
- New HD battery technology, the pack remains cool no matter the application less risk of overheating
- Up to 25% more runtime vs. our 5,0Ah battery
- Heavy duty pack construction for optimal resistance to jobsite abuses •



| | L1860RHD |
|----------------------------|---------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | 6,0 |
| Voltage (V) | 18 |
| Weight (kg) | 0,86 |
| Supplied in | Gift box |
| Article Number | 4932464754 |
| EAN Code | 4058546226992 |

18V 3.0 AH PROLITHIUM-ION™ HD BATTERY

- The new HD battery technology offers a higher performance level on high demand applications
- AEG Powertools PROLITHIUMION™ technology provides the optimum power battery platform with triple protection
- Thermal overload protection: Protects the battery if temperature gets too high
- · Current overload protection: Shuts down the pack in order to protect battery and tool from high current draw
- Individual cell monitoring: Protects individual cells from over discharging
- Backwards compatible with all AEG 18V tools

Battery type

Voltage (V)

Weight (kg)

Supplied in

Article Number EAN Code

Battery pack capacity (Ah)

• On-board battery fuel gauge helps the user to maximize his battery run-time efficiency

L1830RHD

4932471051

4058546286798

Li-ion

3,0

18

0.66 Gift box

- New HD battery technology, the pack remains cool no matter the application less risk of overheating
- Up to 25% more runtime vs. our 5.0Ah battery
- Heavy duty pack construction for optimal resistance to jobsite abuses









L1890RHD

L1860RHD

L1830RHD



L1850R

18V 5,0 AH PROLITHIUM-ION™ BATTERY

AEG Powertools PROLITHIUMION™ technology provides the optimum power battery platform with triple protection

- Thermal overload protection: Protects the battery if temperature gets too high
- · Current overload protection: Shuts down the pack in order to protect the battery and tool from high current draw
- Individual cell monitoring: Protects individual cells from over discharging
- Same size and weight as the 4.0Ah but with 25% more runtime
- Backwards compatible with all AEG 18V tools
- On-board battery fuel gauge helps the user to maximize their battery run-time efficiency
- Large heat sink that dissipates heat quicker
- Rubber dampers which absorb movement and prevent damage
- Double spot welds ensure durability during high vibration applications and are more resistant to heat



| | L1850R | |
|----------------------------|-------------------|--|
| Battery type | Li-ion | |
| Battery pack capacity (Ah) | 5,0 | |
| Voltage (V) | 18 | |
| Weight (kg) | 0,75 | |
| Supplied in | Blister packaging | |
| Article Number | 4932451630 | |
| EAN Code | 4002395140978 | |
| | | |

18V 4.0 AH PROLITHIUM-ION™ BATTERY

- AEG 4,0Ah pack provides extended runtime and power in a compact package
- Compatible with all AEG PRO18V powertools
- Light weight and compact design to minimise user fatigue
- Thermal overload protection: Protects battery if temperature gets too high
- Current overload protection: Shuts down the pack in order to protect battery and tool from high current draw
- Individual cell monitoring: Protects individual cells from over discharging
- LED Charge level indicator



| | L1840S | |
|----------------------------|---------------|---------------|
| Battery type | Li-ion | |
| Battery pack capacity (Ah) | 4,0 | |
| Voltage (V) | 18 | |
| Weight (kg) | 0,7 | L1 |
| Supplied in | Gift box | |
| Article Number | 4935478636 | |
| EAN Code | 4058546348298 | 4 10585461348 |
| | | |

18V 2.0 AH PROLITHIUM-ION™ BATTERY

- AEG 2,0Ah pack provides ultimate portability and power in a compact package
- Compatible with all AEG PRO18V powertools
- Light weight and compact design to minimise user fatigue
- Thermal overload protection: Protects battery if temperature gets too high
- Current overload protection: Shuts down the pack in order to protect battery and tool from high current draw
- Individual cell monitoring: Protects individual cells from over discharging
- LED Charge level indicator





NEW



| | | | L18 | 205 |
|---|-------|-----|-----|-----|
| 4 | 05854 | 613 | 392 | 10 |

| | L1820S |
|----------------------------|---------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | 2,0 |
| Voltage (V) | 18 |
| Weight (kg) | 0.42 |
| Supplied in | Gift box |
| Article Number | 4935472275 |
| EAN Code | 4058546339210 |
| | |



L1840S

L1850R

Article Number EAN Code

18V PROLITHIUM-ION™ BATTERY STARTER KIT

- Supplied with 1 x L1820S PROLITHIUM-ION™ 18v battery and 1 x BL18S charger
- AEG Powertools Lithium-Ion technology provides the optimum power Battery platform with triple protection
- Thermal overload protection: Protects Battery if Temperature gets too high •
- Current overload protection: Shuts down the pack in order to protect battery and tool from high current draw Current overload protection: Shuts down the pack in order to protect battery and tool from high current draw
- On-board battery fuel gauge helps the user to maximize battery run-time efficiency



| 4935478933 |
|---------------|
| 4058546362157 |
| |

18V PROLITHIUM-ION™ BATTERY STARTER KIT

- Supplied with 1 x L1820S PROLITHIUM-ION™ 18v battery and 1 x BL18S charger
- AEG Powertools Lithium-Ion technology provides the optimum power Battery platform with triple protection
- Thermal overload protection: Protects Battery if Temperature gets too high
- Current overload protection: Shuts down the pack in order to protect battery and tool from high current draw
- Individual cell monitoring: Protects individual cells from over discharging
- On-board battery fuel gauge helps the user to maximize battery run-time efficiency









SET L1820S



NEW

SET L1840S

14-18V FAST TWIN CHARGER

BL1418

BL1418

BL 18S

4 10585461339227

4 0585460224875

- Power LED: Indicates if the charger is plugged on an energy source
- Evaluate LED: Indicates when the charger is analyzing the battery status
- Defect LED: Blinks when the pack is defective
- Charging LED: Blinks when the battery is charging, stays when the pack is charged
- Temperature LED: Blinks when the pack is too hot or too cold and needs to be cooled or warmed before charging



| BL1418 | |
|---------------|--|
| Li-ion | |
| 14-18v | |
| 0,98 | |
| Gift box | |
| 4932464542 | |
| 4058546224875 | |
| | Li-ion 14-18v 0,98 Gift box 4932464542 |

18V CHARGER

- Compatible with all AEG PRO18V batteries
- LED Charge level indicator with easy to read descriptions
- Battery Fault indicator displays when battery is defective
- Temperature indicator displays if pack is to hot, or to cold to charge
- Power LED indicates if charger is plugged into a power source



| | BL 18S |
|-----------------------------|---------------|
| Charging range | 18V |
| Charge rate (Amps per hour) | 2.0 |
| Weight (kg) | 0,35 |
| Supplied in | Gift box |
| Article Number | 4935472276 |
| EAN Code | 4058546339227 |
| | |

18V CHARGER

- Compatible with all AEG PRO18V batteries
- LED Charge level indicator with easy to read descriptions
- Battery Fault indicator displays when battery is defective
- Temperature indicator displays if pack is to hot, or to cold to charge
- Power LED indicates if charger is plugged into a power source



| | AL 18G |
|-----------------------------|---------------|
| Charging range | 18V |
| Charge rate (Amps per hour) | 2,0 |
| Weight (kg) | 0,65 |
| Supplied in | Gift box |
| Article Number | 4932459891 |
| EAN Code | 4058546030636 |



AEG PRO 120 COMPACT SIZE HEAVY DUT



AEG

SU121

THE PRO/12V RANGE

BBS 12C2

12V 2-SPEED DRILL DRIVER

• Removable chuck system allows the user to keep a 25mm screwdriving bit in the reception when the chuck is installed

- Extremely compact percussion drill 192mm length with the chuck / 155mm without
- Belt clip for easy transportation
- Built in fuel gauge
- High torque 40Nm for a wide range of applications
- Offset and right angle attachments available seperately
- Compatible with AEG PROLITHIUMION[™] battery technology featuring overload protection for maximum durability of battery and tool

| | BBS 12C2 LI-202B | BBS 12C2 Li-202C KIT 1 |
|--------------------------------|--|--|
| Battery type | Li-ion | Li-ion |
| Battery pack capacity (Ah) | 2,0 | 2,0 |
| No. of batteries supplied | 2 | 2 |
| Charger supplied | 40 min | 40 min |
| Max. drilling wood/ steel (mm) | 20 / 10 | 20 / 10 |
| Chuck capacity (mm) | 10 | 10 |
| Max. torque (Nm) | 32 | 40 |
| No load speed (rpm) | 0 - 400 / 0 - 1500 | 0 - 400 / 0 - 1500 |
| Standard equipment | Removable chuck, screwdriving bit, belt clip | Removable chuck, chuck offset attachment, screwdriving bit, belt clip |
| Weight with battery pack (kg) | 1,2 | 1,2 |
| Supplied in | Tool bag | Kitbox |
| Article Number | 4935446693 | 4935446382 |
| EAN Code | 4002395136377 | 4002395136131 |





BSB 12C2

12V 2-SPEED ULTRA COMPACT PERCUSSION DRILL

- Compact hammer drill/driver measuring only 192mm
- Powerful torque of up to 40Nm (4.0Ah) for all driving applications
- FIXTEC spindle lock and keyless 10mm chuck
- 2-speed gearbox for a wide range of applications
- Industrial metal gearbox and gears for superior durability
- Built in fuel gauge and belt clip
- 3 mode selector ease of use between applications

| | BSB 12C2 LI-202B | BSB 12C2 LI-402B | |
|---|--------------------|--------------------|--|
| Battery type | Li-ion | Li-ion | |
| Battery pack capacity (Ah) | 2,0 | 4,0 | |
| No. of batteries supplied | 2 | 2 | |
| Charger supplied | 40 min | 80 min | |
| Max. drilling wood/ steel/ masonry (mm) | 20 / 10 / 10 | 20 / 10 / 10 | |
| Chuck capacity (mm) | 10 | 10 | |
| Max. torque (Nm) | 40 | 40 | |
| No load speed (rpm) | 0 - 400 / 0 - 1500 | 0 - 400 / 0 - 1500 | |
| Max. percussion rate (bpm) | 22.500 | 22.500 | |
| Weight with battery pack (kg) | 1,4 | 1,2 | |
| Supplied in | Tool bag | Tool bag | |
| Article Number | 4935443964 | 4935446696 | |
| EAN Code | 4002395135622 | 4002395136384 | |





12V COMPACT SCREWDRIVER

- 17-stage torque adjustment plus additional drilling stage
- 2-speed gearbox for a wide range of applications
- Built in fuel gauge
- Belt clip
- FIXTEC spindle lock on keyless 10mm chuck
- Electronic switch with variable speed
- Built in LED light illuminates the work surface
- Compatable with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool

| | BS 12C2 LI-152B | BS 12C2 LI-202B | BS 12C2 Li-202C |
|--------------------------------|--------------------|--------------------|--------------------|
| Battery type | Li-ion | Li-ion | Li-ion |
| Battery pack capacity (Ah) | 1,5 | 2,0 | 2,0 |
| No. of batteries supplied | 2 | 2 | 2 |
| Charger supplied | 30 min | 40 min | 40 min |
| Max. drilling wood/ steel (mm) | 20 / 10 | 20 / 10 | 20 / 10 |
| Chuck capacity (mm) | 10 | 10 | 10 |
| Max. torque (Nm) | 34 | 34 | 34 |
| No load speed (rpm) | 0 - 350 / 0 - 1500 | 0 - 350 / 0 - 1500 | 0 - 350 / 0 - 1500 |
| Weight with battery pack (kg) | 1,1 | 1,1 | 1,1 |
| Supplied in | Tool bag | Tool bag | Kitbox |
| Article Number | 4935448464 | 4935448465 | 4935447867 |
| EAN Code | 4002395259380 | 4002395259397 | 4002395135585 |



4







BS 12C2

DC 12C2



12V COMPACT PERCUSSION DRILL

- Compact (188mm OAL) & powerful for completion of all jobsite applications
- 32Nm maximum torque delivers complete power
- 2 speed Gearbox 0-350 / 0-1500rpm
- 24-stage torque adjustment
- 10mm single sleeve chuck with full metal jaws
- 3 mode selector ease of use between functions
- 12V 2.0Ah PROLITHIUMION™ pack delivering higher power and higher runtime

| | BSB 12G3 LI-202C | |
|---|------------------|--|
| Battery type | Li-ion | |
| Battery pack capacity (Ah) | 2,0 | |
| No. of batteries supplied | 2 | |
| Charger supplied | 80 min | |
| Max. drilling wood/ steel/ masonry (mm) | 30 / 10 / 10 | |
| Chuck capacity (mm) | 0,8 - 10 | |
| Max. torque (Nm) | 32 | |
| No load speed gear 1 (rpm) | 0 - 350 | |
| No load speed gear 2 (rpm) | 0 - 1500 | |
| Max. percussion rate (bpm) | 20.250 | |
| Weight with battery pack (kg) | 1,2 | |
| Supplied in | Kitbox | |
| Article Number | 4935451531 | |
| EAN Code | 4002395145683 | |
| | | |

12V COMPACT DRILL DRIVER

- Compact (180mm OAL) & powerful for completion of all jobsite applications
- Up to 32Nm maximum torque delivers complete power
- 2 speed Gearbox delivering 0-350 / 0-1500rpm
- 24-stage torque adjustment for complete control
- 10mm single sleeve chuck with full metal jaws
- 12V 2.0Ah PROLITHIUMION™ pack delivering higher power and higher runtime (202C Version only)
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool

| | BS 12G3 LI-152C | BS 12G3 LI-202C | |
|--------------------------------|--------------------|--------------------|--|
| Battery type | Li-ion | Li-ion | |
| Battery pack capacity (Ah) | 1,5 | 2,0 | |
| No. of batteries supplied | 2 | 2 | |
| Charger supplied | 60 min | 80 min | |
| Max. drilling wood/ steel (mm) | 30 / 10 | 30 / 10 | |
| Chuck capacity (mm) | 0,8 - 10 | 0,8 - 10 | |
| Max. torque (Nm) | 32 | 32 | |
| No load speed (rpm) | 0 - 350 / 0 - 1500 | 0 - 350 / 0 - 1500 | |
| Weight with battery pack (kg) | 1,1 | 1,1 | |
| Supplied in | Kitbox | Kitbox | |
| Article Number | 4935451090 | 4935451091 | |
| EAN Code | 4002395811168 | 4002395811175 | |







12V ULTRA COMPACT DRILL/DRIVER

- Compact pocket drill/screwdriver measuring only 161mm
- Built in fuel gauge
- 17-stage torque adjustment plus additional drilling stage
- Industrial metal gearbox and gears for superior durability
- FIXTEC spindle lock and keyless 10mm chuck
- Electronic switch with variable speed
- Built in LED light illuminates the work surfaces
- Overload protection
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool
 Protect uters

| | BS 12C LI-151B |
|--------------------------------|----------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | 1,5 |
| No. of batteries supplied | 1 |
| Charger supplied | 30 min |
| Max. drilling wood/ steel (mm) | 20 / 10 |
| Chuck capacity (mm) | 10 |
| Max. torque (Nm) | 18,5 |
| No load speed (rpm) | 0 - 575 |
| Weight with battery pack (kg) | 1,0 |
| Supplied in | Tool bag |
| Article Number | 4935433901 |
| EAN Code | 4002395126347 |
| | |



BS 12C



BSB 12G3

12V ULTRA COMPACT IMPACT DRIVER

BSS 12C

- Ultra compact impact driver measuring only 163mm
- 115Nm torque
- Industrial metal gearbox and gears for superior durability
- Built in fuel gauge
- ¼" Hex bit reception
- Ergonomic soft-grip design
- NEW 3 beam LED for total workplace illumination
- Belt clip
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool

| BSS 12C-0 | BSS 12C LI-202C | |
|---------------|--|---|
| Li-ion | Li-ion | |
| - | 2,0 | |
| 0 | 2 | |
| - | 40 min | |
| 115 | 115 | |
| 0 - 2000 | 0 - 2000 | |
| 0 - 3000 | 0 - 3000 | |
| ¼" Hex | 14" Hex | |
| 1,0 | 1,0 | |
| - | Kitbox | |
| 4935446702 | 4935443965 | |
| 4002395136407 | 4002395135639 | - |
| | Li-ion - 0 - 115 0 - 2000 0 - 3000 %" Hex 1,0 - 4935446702 | Li-ion Li-ion - 2,0 0 2 - 40 min 115 115 0 - 2000 0 - 2000 0 - 3000 0 - 3000 ½" Hex ¼" Hex 1,0 1,0 - Kitbox 4935446702 4935443965 |





BBH 12

12V HAMMER

- L-shape SDS hammer for drilling and fixing into concrete up to 13mm
- 0.9 Joule impact energy delivers high performance
- Hammer action stop for rotary drilling in wood and metal
- Built in fuel gauge
- Metal gearbox for extended durability
- Safety clutch for user protection
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of
- battery and tool
- Supplied with a screwdriving bit adaptor

| | BBH 12-0 | BBH 12 LI-202C | BBH 12 LI-401C | BBH 12 LI-402C |
|--|---------------------|----------------|----------------|----------------|
| Battery type | Li-ion | Li-ion | Li-ion | Li-ion |
| Battery pack capacity (Ah) | - | 2,0 | 4,0 | 4,0 |
| No. of batteries supplied | 0 | 2 | 1 | 2 |
| Charger supplied | - | 40 min | 80 min | 80 min |
| Max. drilling wood/ steel/ concrete (mm) | 10 / 8 / 13 | 10 / 8 / 13 | 10 / 8 / 13 | 10 / 8 / 13 |
| Blow energy (EPTA)(J) | 0,9 | 0,9 | 0,9 | 0,9 |
| No load speed (rpm) | 0 - 800 | 0 - 800 | 0 - 800 | 0 - 800 |
| Full load hammer action (bpm) | 0 - 5350 | 0 - 5350 | 0 - 5350 | 0 - 5350 |
| Weight with battery pack (kg) | No charger supplied | 1,6 | 1,8 | 1,8 |
| Supplied in | Gift box | Kitbox | Kitbox | Kitbox |
| Article Number | 4935446699 | 4935443968 | 4935443988 | 4935443991 |
| EAN Code | 4002395136391 | 4002395135646 | 4002395135714 | 4002395135721 |
| | | | | |





12V DRYWALL SCREWDRIVER

- Light and small Drywall Screwdriver weighs only 1,5kg with an OAL of 254mm
- Powerful, 4000rpm motor
- A lock on trigger to work more comfortably and save runtime
- Fine adjustment nose cone for setting desired countersink levels in single screw applications +/-5 mm
- Quick release ¼" Hex chuck allows for easy bit change
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- Bright LED workspace illumination
- Belt clip to hang your tool quickly and easily

| | BTS 12C-0 | BTS 12C LI-202C | BTS 12C LI-302C |
|-------------------------------|---------------|-----------------|-----------------|
| Battery type | Li-ion | Li-ion | Li-ion |
| Battery pack capacity (Ah) | - | 2,0 | 3,0 |
| No. of batteries supplied | 0 | 2 | 2 |
| Charger supplied | - | 40 min | 60 min |
| Max. torque (Nm) | 3 | 3 | 3 |
| No load speed (rpm) | 4000 | 4000 | 4000 |
| Tool reception | ¼" Hex | 14" Hex | ¼" Hex |
| Wood screws to (mm) | 25 - 55 | 25 - 55 | 25 - 55 |
| Weight with battery pack (kg) | - | 1,5 | 1,5 |
| Supplied in | Gift box | Gift box | Gift box |
| Article Number | 4935459624 | 4935459625 | 4935459626 |
| EAN Code | 4058546027964 | 4058546027971 | 4058546027988 |



BTS 12C







12V FLASHLIGHT

- Fantastic power to weight ratio
- Extra long runtime with PROLITHIUMION™ packs
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| BLL 12C | |
|---------------|--|
| LED | |
| 9 | |
| 0,71 | |
| Gift box | |
| 4932352162 | |
| 4002395368150 | |
| | LED 9 0,71 Gift box 4932352162 |



12V MULTI-TOOL

- The 12V multi-tool is a problem solver for the professional user
- 20.000opm enables you to work with all kind of materials
- Speed dial 1-6 for perfect control of the speed
- Lock-on switch for better comfort, no need for constant pushing
- Keyless bladechange is an easy and quick solution
- 1,5°/1,5° L/R oscillation for a clean cut
- Fuel gauge, to be aware of the power remaining
- Unique LED in multi-tool, makes working in dark areas easy
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool



| | BMT12C-0 | BMT12C LI-152B | |
|-------------------------------|----------------------------------|----------------------------------|--|
| Battery type | Li-ion | Li-ion | |
| Battery pack capacity (Ah) | - | 1,5 | |
| Charger supplied | - | 30 min | |
| Standard equipment | 1 x multi-tool head, accessories | 1 x multi-tool head, accessories | |
| Oscillation rate (opm) | 20.000 | 20.000 | |
| Weight with battery pack (kg) | 1,37 | 1,1 | |
| Supplied in | Gift box | Tool bag | |
| Article Number | 4935464030 | 4935464031 | |
| EAN Code | 4058546219758 | 4058546219765 | |
| | | | |





12V 6.0 AH PROLITHIUM-ION™ BATTERY

- AEG Powertools PROLITHIUMION™ technology provides the optimum power battery platform with triple protection
- Thermal overload protection: Protects the battery if temperature gets too high
- · Current overload protection: Shuts down the pack in order to protect the battery and tool from high current draw
- Individual cell monitoring: Protects individual cells from over discharging



L1260

| | L1260 |
|----------------------------|-------------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | 6,0 |
| Voltage (V) | 12 |
| Weight (kg) | 0,46 |
| Supplied in | Blister packaging |
| Article Number | 4932459181 |
| EAN Code | 4002395288564 |

12V 3.0 AH PROLITHIUM-ION™ BATTERY

- AEG Powertools PROLITHIUMION™ technology provides the optimum power battery platform with triple protection
- Thermal overload protection: Protects the battery if temperature gets too high
- Current overload protection: Shuts down the pack in order to protect the battery and tool from high current draw
- Individual cell monitoring: Protects individual cells from over discharging



| | L1230 |
|----------------------------|-------------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | 3,0 |
| Voltage (V) | 12 |
| Weight (kg) | 0,46 |
| Supplied in | Blister packaging |
| Article Number | 4932459180 |
| EAN Code | 4002395288557 |

12V 4.0 AH PROLITHIUM-ION™ BATTERY

- AEG Powertools PROLITHIUMION™ technology provides the optimum power battery platform with triple protection
- Thermal overload protection: Protects the battery if temperature gets too high
- Current overload protection: Shuts down the pack in order to protect the battery and tool from high current draw
- Individual cell monitoring: Protects individual cells from over discharging
- Impact and vibration resistant outer shell to protect and increase the lifetime of each pack



L1240

| | L1240 |
|----------------------------|-------------------|
| Battery type | Li-ion |
| Battery pack capacity (Ah) | 4,0 |
| Voltage (V) | 12 |
| Weight (kg) | 0,46 |
| Supplied in | Blister packaging |
| Article Number | 4932430166 |
| EAN Code | 4002395378272 |



12V 2.0 AH PROLITHIUM-ION™ BATTERY

- AEG Powertools PROLITHIUMION™ technology provides the optimum power battery platform with triple protection
- Thermal overload protection: Protects the battery if temperature gets too high
- Current overload protection: Shuts down the pack in order to protect the battery and tool from high current draw
- Individual cell monitoring: Protects individual cells from over discharging



| L1220 |
|-------------------|
| Li-ion |
| 2,0 |
| 12 |
| 0,24 |
| Blister packaging |
| 4932430165 |
| 4002395378265 |
| |

PRO12V BATTERY CHARGER

- Compatible with all AEG 12V batteries
- Heavy duty durable plastic case
- Dual LED Charge level indicator with easy to read descriptions
- Battery Fault indicator displays when battery is defective



| | LL1240 | |
|-----------------------------|---------------|----------|
| Charge rate (Amps per hour) | 4,0 | |
| Weight (kg) | 0,46 | |
| Article Number | 4932471263 | 4 058546 |
| EAN Code | 4058546288914 | 4 058546 |
| | | |

3.6V INLINE SCREWDRIVER

- In-line or angled handle adjustment
- 10-stage torque selection plus drill stage
- Ergonomic, modern design
- 2-speed full metal gearbox
- ¼" Hex bit reception



SE 3.6

| | SE 3.6 LI-152C |
|---|----------------|
| | 002395 197538 |
| 4 | 002395 197538 |

| | SE 3.6 LI-152C | |
|-------------------------------|----------------|--|
| Battery type | Li-ion | |
| Battery pack capacity (Ah) | 1,5 | |
| No. of batteries supplied | 2 | |
| Charger supplied | 30 min | |
| No load speed (rpm) | 200 / 600 | |
| Weight with battery pack (kg) | 0,6 | |
| Supplied in | Kitbox | |
| Article Number | 4935413165 | |
| EAN Code | 4002395197538 | |

LL1240

LL1240



THIS IS HOW REAL PROS MULTI TASK

AEG-POWERTOOLS.EU

18V MULTI-TOOL

- Gives more power and more runtime whilst keeping the advantage of cordless portability.
- Tool free interchangeable heads to easily switch between a wide range of applications
- Large 2-finger switch with adjustable speed
- Range of one-handed applications
- Optimum power to weight ratio
- LED for work place illumination
- Built in fuel gauge
- Slim handle design for perfect ergonomics and better vibration absorbtion
- Compatible with AEG PROLITHIUMION™ battery technology featuring overload protection for maximum durability of battery and tool

| OMNI 18C LI-202BKIT1X | OMNI 18C - 0KIT1X | |
|-----------------------|---|---|
| Li-ion | Li-ion | |
| 2.0 | - | |
| 30 min | - | |
| Yes | Yes | |
| Yes | Yes | |
| 2 | 0 | |
| 2 | 2 | |
| 20.000 | 20.000 | |
| Gift box | Gift box | |
| 1,15 | 1,15 | |
| 4935446705 | 4935446706 | |
| 4002395136438 | 4002395136421 | |
| | Li-ion 2.0 30 min Yes Yes 2 2 20.000 Gift box 1,15 4935446705 | Li-ion Li-ion 2.0 - 30 min - Yes Yes Yes Yes 2 0 2 2 20000 20.000 Gift box Gift box 1,15 1,15 4935446705 4935446706 |



OMNI 18C LI-152BKIT1 OMNI 18C - OKIT1X

300W MULTI-TOOL

- Tool free interchangeable heads to easily switch between a wide range of applications
- Large 2 finger switch with adjustable speed
- Range of one handed applications
- LED for work place illumination



OMNI 300

| | OMNI 300 KIT1 |
|-----------------------------------|----------------------------------|
| Power input (W) | 300 |
| Oscillation rate (opm) | 20.000 |
| Oscillation angle left/ right (°) | 2,0 |
| Standard equipment | 1 x multi-tool head, accessories |
| Weight (kg) | 2,52 |
| Supplied in | Tool bag |
| Article Number | 4935431790 |
| EAN Code | 4002395194995 |





OMNI KEYLESS MULTI TOOL HEAD

- For applications: cutting, grout removal, rasping, sanding, scraping, polishing
- Keyless blade change system, no more allen key needed for an easy and quick solution
- Full metal head construction for more durability
- Supplied with an adaptor to fit the most common blades on the market

| | OMNI - MTX |
|-----------------------------------|---------------|
| Oscillation angle left/ right (°) | 2/2 |
| Oscillation rate (opm) | 20.000 |
| Article Number | 4935446707 |
| FAN Code | 4002395136414 |

OMNI MULTI-TOOL HEAD

• For applications: sawing, grout removal, rasping, shaving, sanding, scraping, filing, cutting, sharpening, polishing

| | OMNI-MT |
|-----------------------------------|---------------|
| Oscillation angle left/ right (°) | 1,5 |
| Article Number | 4935440700 |
| EAN Code | 4002395134717 |

OMNI ROTARY/DRYWALL CUTTER HEAD

- A problem solver head for the professional user, which will help them to make clean and precise curve plunge cut in drywall. Precise cut in non-ferrous metal, small and precise grinding & sanding jobs
- Up to 24.000rpm clean cut in all materials
- Adjustable depth gauge for having perfect control of the cut
- Multipurpose depth gauge: one end depth gauge, other end key to change the bit. Easy and quick solution, always by the tool, no need to lose time looking for the key
- 3,2mm reception accepts the most common accessories on the market. Can be used: cutting wheel for cutting metal. Grinding wheel for metal. Sanding wheels for wood. Drywall drill bit etc.

| | OMNI - RT |
|----------------------|---------------|
| No load speed (rpm) | 24.000 |
| Collet capacity (mm) | 3175 |
| Article Number | 4935451311 |
| EAN Code | 4002395151295 |

OMNI JIGSAW HEAD

- For applications: cutting wood, laminate, thin metal and plastic
- Keyless blade change system
- Integrated dust blow
- Full metal gear case for maximum durability
- 15mm stroke length for clean and fast cuts

| | OMNI-JS |
|---|---------------|
| Max. cutting capacity wood/ steel/ aluminium (mm) | 40 / 6 / 10 |
| Stroke length (mm) | 15 |
| No load stroke rate (spm) | 0 - 3000 |
| Article Number | 4935440715 |
| EAN Code | 4002395134748 |
| | |

OMNI-MTX





OMNI-MT



OMNI-RT

OMNI-JS



OMNI RECIPROCATING SAW HEAD

- For applications: cutting metal & plastic pipe, wood (interior, garden & exterior), plasterboard
- 13mm stroke length and up to 3000spm for fast cutting application
- Keyless blade change for perfect ergonomics

| | OMNI-RH |
|---------------------------|---------------|
| No load stroke rate (spm) | 0 - 3000 |
| Stroke length (mm) | 13 |
| Article Number | 4935440725 |
| EAN Code | 4002395134762 |

OMNI RIGHT ANGLE DRILLING HEAD

- For applications: drilling wood, metal and plastic, fastening / screwdriving
- Single sleeve 10mm chuck

| 18 / 10 |
|---------------|
| 12 |
| 0 - 550 |
| 4 |
| 4935440705 |
| 4002395134724 |
| |

OMNI RATCHET HEAD

- For applications: fastening / loosening bolts
- ¾ " reception
- 28Nm torque for up to M12 capacity of nuts
- Up to 220rpm in forward / reverse

| OMNI-IR |
|---------------|
| 0 - 220 |
| ¾" square |
| 28 |
| 4935440720 |
| 4002395134755 |
| |

OMNI IMPACT DRIVER HEAD

- For applications: fastening / screwdriving, drilling wood & metal
- Quick release system for easy change of bit

| | OMNI-IH | |
|---------------------|---------------|--|
| Max. torque (Nm) | 62 | |
| Impact rate (ipm) | 0 - 3100 | |
| No load speed (rpm) | 0 - 2000 | |
| Tool reception | ¼" Hex | |
| Article Number | 4935440730 | |
| EAN Code | 4002395134779 | |

OMNI-RH



F

OMNI-RAD



OMNI-IR









NEW





INTRODUCING THE NEW SELF-LEVELLING LASERS

WORK ACCURATELY


SPEED DOESN'T COME AT THE EXPENSE OF ACCURACY.



WORK FASTER YOU CAN'T AFFORD MISTAKES SO WE DON'T MAKE THEM.









AEG



*Register within 30 days of purchase. See online for more details. AEG is a registered trademark used under license from AB Electrolux (publ).



APPLICATION GUIDE

| MODEL | CLR215-B | CLG220-B | CLG220-K | CLG330-K |
|----------------------|------------|----------|---|----------|
| INCLUDES | AEG | AEG | → → → AEG ↓ | AEG |
| VISIBILITY | - * | | | |
| PROJECTION LINES | | | | |
| RANGE | 15m | 20m | 20m | 30m |
| IP | 54 | 54 | 54 | 54 |
| HORIZONTAL LEVELLING | ✓ | * | ✓ * | ✓ |
| VERTICAL ALIGNMENT | ✓ | * | * | ✓ |
| CROSS-LINE | ✓ | ✓ | ✓ | ✓ |
| 90° PROJECTION | | | | |
| PLUMB DOWN | | | | ✓ |





THREE GREEN LINE LASER + PLUMB DOWN

- Projects one bright horizontal line, two bright vertical lines at 90° and a plumb down. All lines can be activated
 individually or simultaneously
- Green Laser technology improves visibility by 4 times in all light conditions, is ideal for all job sites
- Jobsite ready working range up to 30M
- The two vertical lines cross in the ceiling and are aligned with the plumb down, this is ideal for transferring points from the floor to ceiling
- Perfect alignment, accurate to ± 0.2mm/m
- Compact design and IP 54 rated with robust rubber overmold protects the housing
- Includes sturdy rotary magnetic wall mount enabling use in metallic surfaces and can be fixed to any other surface through a hang hole
- Includes green target plate to improve visibility of the laser beam at long distances
- ON/OFF Switch with pendulum lock for secure transportation
- Activate each individual line using the top buttons when the laser is switched OFF/lock
- 1/4" thread for tripod mounting

| AEG AEG | | | | | NE |
|------------|--|----|---|----|----|
| | | AE | G | AE | |

| | CLG330-K |
|--------------------------|--|
| Battery type | Alkaline |
| Range (m) | 30M |
| Laser projection (°) | Horizontal Line, 2 x Vertical Lines, Cross Line, Plumb Down |
| Laser classification | Class 2, < 1 mW |
| Colour of laser line | Green |
| Colour of plumb points | Red |
| Accuracy | ±0.2 mm/m |
| Self-levelling range (°) | 3 |
| Self-levelling time (s) | 3~5 |
| Laser wavelength (nm) | 520±10 |
| Tripod fitting | 1/4" |
| Standard equipment | Rotary Magnetic Wall Mount with ⁵ /s" and ¹ /s ⁴ thread, Green Target Plate, 3 x AAA batteries and a Pouch |
| Supplied in | Gift box |
| Article Number | 4935472255 |
| EAN Code | 4058546339012 |

CI C770 K



NEW

CLG220-K

GREEN CROSS LINE LASER KIT

- Projects a bright horizontal and vertical line simultaneously up to 20M
- Green Laser technology improves visibility by 4 times in all light conditions, is ideal for all job sites
- IP 54 rated with robust rubber overmold protects the housing
- Includes sturdy rotary magnetic wall mount enabling use in metallic surfaces and can be fixed to any other surface through a hang hole
- Includes sturdy ceiling bracket to be used with the magnetic wall mount, perfect when levelling suspended ceilings
- Includes green target plate to improve visibility of the laser beam at long distances
- Quick self-levelling, a continues blinking line will indicate when the laser is out off level
- ON/OFF Switch with pendulum lock for secure transportation
- Incline function can be activated through the top button (M) when the laser is switched OFF/lock



| | CLG220-K |
|--------------------------|--|
| Battery type | Alkaline |
| Range (m) | 20M |
| Laser projection (°) | Horizontal and Vertical line simultaneously |
| Laser classification | Class 2, < 1 mW |
| Colour of laser line | Green |
| Accuracy | ± 0.4 mm/m |
| Self-levelling range (°) | 3 |
| Self-levelling time (s) | 3~5 |
| Laser wavelength (nm) | 520 ± 10 |
| Tripod fitting | 1/4" thread |
| Standard equipment | Rotary Magnetic Wall Mount with ⁵ /6" and ¹ /4" thread, Ceiling Bracket, Green Target Plate, 2 x AA Batteries and Pouch |
| Supplied in | Gift box |
| Article Number | 4935472254 |
| EAN Code | 4058546339005 |



CLG330-K

GREEN CROSS LINE LASER

- Projects a bright horizontal and vertical line simultaneously up to 20M
- Green Laser technology improves visibility by 4 times in all light conditions, is ideal for all job sites
- ON/OFF Switch with lock for secure transportation •
- IP 54 rated with robust rubber overmold protects the housing
- Includes sturdy rotary magnetic wall mount enabling use in metallic surfaces and can be fixed to any other surface through a hang hole
- Quick self-levelling and a continues blinking line will indicate when the laser is out off level 00

| | CLG220-B |
|--------------------------|--|
| Battery type | Alkaline |
| Range (m) | 20M |
| _aser projection (°) | Horizontal and vertical line simultaneous |
| _aser classification | Class 2, < 1 mW |
| Colour of laser line | Green |
| Accuracy | ±0.4mm/m |
| Self-levelling range (°) | 3 |
| Self-levelling time (s) | 3~5 |
| _aser wavelength (nm) | 520±10 |
| Tripod fitting | 1/4" thread |
| Standard equipment | Rotary Magnetic Wall Mount with $^{5}\!/_{6}$ ' and $^{1}\!/_{4}$ thread, 2 x AA Batteries and Pouch |
| Article Number | 4935472253 |

CLG220-B



RED CROSS LINE LASER

- Projects a bright single vertical line, single horizontal line and a cross line for up to 15M •
- IP 54 rated with robust rubber overmold protects the housing
- ON/OFF Switch with pendulum lock for secure transportation
- · Sturdy rotary magnetic wall mount included enabling use in metallic surfaces and can be fixed to any other surface through a hang hole

4058546338992

- Quick self-levelling, a continues blinking line will indicate when the laser is out off level
- Perfect alignment, accurate to ±0.3 mm/m
- ¹/4" thread for tripod mounting

EAN Code

| | CLR215-B |
|--------------------------|--|
| Battery type | Alkaline |
| Range (m) | 15M |
| Laser projection (°) | Single vertical, single horizontal and cross line |
| Laser classification | Class 2, < 1 mW |
| Colour of laser line | Red |
| Accuracy | ±0.3mm/m |
| Self-levelling range (°) | 3 |
| Self-levelling time (s) | 3~5 |
| Laser wavelength (nm) | 635±5nm |
| Tripod fitting | 1/4" |
| Standard equipment | Rotary Magnetic Wall Mount with ⁵ /s" and ¹ /s" thread, 2 x AA Batteries and Pouch |
| Supplied in | Gift box |
| Article Number | 4935472252 |
| EAN Code | 4058546338985 |

LMG 50

CLR215-B

LASER DISTANCE METER

- Point and shoot system one person measuring with only one simple press of a button .
- Area, volume, height and width measurement •
- Pythagoras 3 types
- Large and easy to read 3 line LCD graphical display with automatic white backlight
- · Measuring pin for corner measurement
- Memory recall for last 10 measurements
- IP54 water & dust protection
- Extremely slim LDM
- Rubber overmold for perfect handling
- Large rising buttons with intuitive positioning
- Belt clip makes it easy to carry and to hold in the pocket

| | LMG 50 |
|-------------------------------|-------------------|
| Battery type | 2 x AAA |
| No. of batteries supplied | 2 |
| IP protection class | IP 54 |
| Max. measurement range (m) | 50 |
| Pythagoras function | 3 - point |
| Weight with battery pack (kg) | 1,0 |
| Supplied in | Blister packaging |
| Article Number | 4935447680 |
| EAN Code | 4002395294275 |
| | |







NEW

CLG220-B

NEW

AEG

-

AEG

AC HAMMER RANGE

SDS-PLUS ROTARY HAMMER

- Powerful 800 watt motor
- 24mm drilling capacity in concrete
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanismSoft-grip handle for comfort
- Supplied with a side handle, metal depth gauge and a 4m cable

| | BH 24IE | |
|--|---------------|--|
| Power input (W) | 800 | |
| No load speed (rpm) | 0 - 1500 | |
| Full load hammer action (bpm) | 0 - 4500 | |
| Blow energy (EPTA)(J) | 2,4 | |
| Max. drilling wood/ steel/ concrete (mm) | 30 / 13 / 24 | |
| Tool reception | SDS-Plus | |
| FIXTEC™ | No | |
| Supplied in | Kitbox | |
| Weight (kg) | 2,8 | |
| Article Number | 4935451558 | |
| EAN Code | 4002395145201 | |
| | | |

SDS-PLUS COMBI HAMMER

- Powerful 800 watt motor
- 24mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Safety cluch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and Reverse mechanism
- Soft grip handle for comfort

| | KH 24IE | |
|--|---------------|--|
| Power input (W) | 800 | |
| No load speed (rpm) | 0 - 1500 | |
| Full load hammer action (bpm) | 0 - 4500 | |
| Blow energy (EPTA)(J) | 2,4 | |
| Max. drilling wood/ steel/ concrete (mm) | 30 / 13 / 24 | |
| Tool reception | SDS-Plus | |
| FIXTEC™ | No | |
| Supplied in | Kitbox | |
| Weight (kg) | 2,8 | |
| Article Number | 4935451555 | |
| EAN Code | 4002395144570 | |
| | | |

SDS-PLUS ROTARY HAMMER

- Powerful 800 watt motor
- 24mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- FIXTEC quick change chuck
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort
- Supplied with a side handle, FIXTEC adaptor and keyless chuck, metal depth gauge and a 4m cable

| | KH_24IXE |
|--|---------------|
| Power input (W) | 800 |
| No load speed (rpm) | 0 - 1500 |
| Full load hammer action (bpm) | 0 - 4500 |
| Blow energy (EPTA)(J) | 2,4 |
| Max. drilling wood/ steel/ concrete (mm) | 30 / 13 / 24 |
| Tool reception | SDS-Plus |
| FIXTEC™ | Yes |
| Supplied in | Kitbox |
| Weight (kg) | 2,8 |
| Article Number | 4935451553 |
| EAN Code | 4002395144556 |
| | |



KH 24IE













SDS-PLUS COMBI HAMMER

KH 26E

- Powerful 800 watt motor
- 26mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort
- Supplied with a side handle, metal depth gauge and a 4m cable



| KH 26E | KH 26XE | |
|---------------|---|--|
| 800 | 800 | |
| 0 - 1500 | 0 - 1500 | |
| 0 - 4500 | 0 - 4500 | |
| 2,5 | 2,5 | |
| 30 / 13 / 26 | 30 / 13 / 26 | |
| SDS-Plus | SDS-Plus | |
| No | Yes | |
| Kitbox | Kitbox | |
| 2,6 | 2,8 | |
| 4935428180 | 4935428910 | |
| 4002395194360 | 4002395194681 | |
| | 800 0 - 1500 0 - 4500 2,5 30 / 13 / 26 SDS-Plus No Kitbox 2,6 4935428180 | Note Note 800 800 0 - 1500 0 - 1500 0 - 4500 0 - 4500 2,5 2,5 30 / 13 / 26 30 / 13 / 26 SDS-Plus SDS-Plus No Yes Kitbox Kitbox 2,6 2,8 4935428180 4935428910 |



SDS-PLUS COMBI HAMMER

- Powerful 1010 watt motor
- 28mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for drilling/chiselling in sensitive materials
- FIXTEC quick change tool system
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Soft-grip handle for comfort
- Electronic overload protection
- No load speed limitation
- Supplied with a side handle, FIXTEC adaptor and keyless chuck, metal depth gauge and a 4 m cable



| | KH 28 Super XE |
|--|----------------|
| Power input (W) | 1010 |
| No load speed (rpm) | 0 - 1500 |
| Full load hammer action (bpm) | 0 - 5000 |
| Blow energy (EPTA)(J) | 2,8 |
| Max. drilling wood/ steel/ concrete (mm) | 30 / 13 / 28 |
| Tool reception | SDS-Plus |
| FIXTEC™ | Yes |
| Supplied in | Kitbox |
| Weight (kg) | 2,8 |
| Article Number | 4935428190 |
| EAN Code | 4002395194377 |
| | |



KH 28 Super XE

SDS-PLUS COMBI HAMMER

- Powerful 750 watt motor
- 30mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for controlled drilling in masonry
- FIXTEC quick change tool system
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Hammer action stop for drilling in wood or metal
- Supplied with a side handle, FIXTEC adaptor and keyed chuck, metal depth gauge and a 4m cable

| | PN 3500X | PN 3500 |
|--|---------------|---------------|
| Power input (W) | 750 | 750 |
| No load speed (rpm) | 0 - 970 | 0 - 970 |
| Full load hammer action (bpm) | 0 - 4200 | 0 - 4200 |
| Blow energy (EPTA)(J) | 3,4 | 3,4 |
| Max. drilling wood/ steel/ concrete (mm) | 40 / 16 / 30 | 40 / 16 / 30 |
| Tool reception | SDS-Plus | SDS-Plus |
| FIXTEC™ | Yes | No |
| Supplied in | Kitbox | Kitbox |
| Weight (kg) | 3,6 | 3,4 |
| Article Number | 4935412210 | 4935412152 |
| EAN Code | 4002395198337 | 4002395198306 |

SDS-MAX TRADESMANN CHIPPING HAMMER

- Powerful 1100 watt motor
- 7.5J EPTA blow energy
- 2 mode SDS-Max chipping hammer
- Multi position chisel function gives 12 different positions to optimize working angle
- Robust magnesium gear housing for tough environments
- Low vibration construction enhances usage time per day
- Soft grip side handleSupplied with a side handle and a 4m cable



| | MH 5G |
|-------------------------------|---------------|
| Devues input (M) | 1100 |
| Power input (W) | |
| Full load hammer action (bpm) | 0 - 3000 |
| Blow energy (EPTA)(J) | 7,5 |
| Tool reception | SDS-Max |
| Supplied in | Kitbox |
| Weight (kg) | 5,9 |
| Article Number | 4935443170 |
| EAN Code | 4002395135462 |

SDS-MAX COMBI HAMMER

- Powerful 1100 watt motor
- 7.5J EPTA blow energy
- 40mm drilling capacity in concrete
- Rotary stop for chiselling applications
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- Supplied with a side handle, metal depth gauge, grease and a 4m cable

| | KH 5G |
|---|-------------------------|
| Power input (W) | 1100 |
| No load speed (rpm) | 0 - 450 |
| Full load hammer action (bpm) | 0 - 3000 |
| Blow energy (EPTA)(J) | 7,5 |
| Max. drilling concrete/core bit/tunnel drill bit (m | n) 40 / 105 / 65 |
| Tool reception | SDS-Max |
| Supplied in | Kitbox |
| Weight (kg) | 6,4 |
| Article Number | 4935418160 |
| EAN Code | 4002395133062 |
| | |





PN 3500X





MH 5G

002395

KH 5G

SDS-MAX DEMOLITION HAMMER

• Powerful 1200 watt motor

- 8.5J impact energy for effortless chipping
- Soft hammer mode reduces blow energy for chiselling in sensitive materials
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Soft start for precise start of chiselling
- Service light provides in-time notice in the case of worn out brushes
- Power light indicates if the tool is live
- Supplied with a D front handle, grease and a 6m cable
- MH 5E Power input (W) 1200 Full load hammer action (bpm) 0 - 2840 Blow energy (EPTA)(J) 8.5 Tool reception SDS-Max Supplied in Kitbox Weight (kg) 6.2 Article Number 4935412361 EAN Code 4002395198795

SDS-MAX COMBI HAMMER

- Powerful 1200 watt motor
- 40mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for drilling/chiselling in sensitive materials
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- Service light provides in-time notice in the case of worn out brushes
- Power light indicates if the tool is live
- Supplied with a side handle, metal depth gauge, grease and a 6m cable







| KH 5E Power input (W) 1200 No load speed (rpm) 0 - 300 Full load hammer action (bpm) 0 - 2840 |
|---|
| No load speed (rpm) 0 - 300 |
| |
| Full load hammer action (bpm) 0 - 2840 |
| |
| Blow energy (EPTA)(J) 8,5 |
| Max. drilling concrete/core bit/tunnel drill bit (mm) 40 / 90 / 65 |
| Tool reception SDS-Max |
| Supplied in Kitbox |
| Weight (kg) 6,6 |
| Article Number 4935412326 |
| EAN Code 4002395198603 |



- Powerful 1500 watt motor
- 10.5J impact energy for stronger chipping applications
- Soft hammer mode for reducing the blow energy by working on sensitive materials
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Soft start for precise start of chiseling
- Service lights provide in-time notice in case of worn out brushes
- Power light indicates if the tool is live





MH 7E



| | | MH 7E |
|---|-------|---------------|
| | | |
| 4 | 05854 | 6 0 1 0 8 3 6 |

| | MH 7E |
|-------------------------------|---------------|
| Power input (W) | 1500 |
| Full load hammer action (bpm) | 0 - 2700 |
| Blow energy (EPTA)(J) | 10,5 |
| Tool reception | SDS-Max |
| Supplied in | Kitbox |
| Weight (kg) | 7,3 |
| Article Number | 4935459422 |
| EAN Code | 4058546010836 |
| | |

KH 5E

SDS-MAX CHIPPING HAMMER

- Powerful 1500 watt motor
- 10.5J impact energy for stronger chipping applications
- Soft hammer mode for reducing the blow energy by working on sensitive materials
- 3 mode selector switch (1-Hammer drilling / 2-Chisel lock off), allows to lock chisel in 12 different positions
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Soft start for precise start of chiseling
- Service lights provides in-time notice in case of worn out brushes
- Power light indicates if electricity flows



| | KH 7E |
|-------------------------------|---------------|
| Power input (W) | 1500 |
| No load speed (m/min) | 300 |
| Full load hammer action (bpm) | 0 - 2700 |
| Blow energy (J) | 10,5 |
| Tool reception | SDS-Max |
| Supplied in | Kitbox |
| Weight (kg) | 7,3 |
| Article Number | 4935459609 |
| EAN Code | 4058546027810 |
| | |

SDS-MAX LARGE DEMOLITION HAMMER

- Powerful 1600 watt motor
- 20J impact energy for heavy demolition applications
- Variable speed electronics for control
- No load speed limitation
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Soft start for precise start of chiselling
- Service light provides in-time notice in the case of worn out brushes
- Automatic cut out carbon brushes
- Soft-grip on handles for comfort
- Supplied with a D front handle, grease and a 6m cable



| | PM 10E |
|-------------------------------|---------------|
| Power input (W) | 1600 |
| Full load hammer action (bpm) | 975 - 1950 |
| Blow energy (EPTA)(J) | 20 |
| Tool reception | SDS-Max |
| Supplied in | Kitbox |
| Weight (kg) | 11,0 |
| Article Number | 4935412418 |
| EAN Code | 4002395198832 |

SDS-MAX LARGE COMBI HAMMER

- Powerful 1700 watt motor
- 20J impact energy for heavy demolition applications
- 50mm drilling capacity into concrete
- Variable speed electronics for control
- No load speed limitation
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- Service light provides in-time notice in the case of worn out brushes
- Automatic cut out carbon brushes

| | PN 11E |
|---|---------------|
| Power input (W) | 1700 |
| No load speed (rpm) | 125 - 250 |
| Full load hammer action (bpm) | 975 - 1950 |
| Blow energy (EPTA)(J) | 20 |
| Max. drilling concrete/core bit/tunnel drill bit (mm) | 50 / 150 / 80 |
| Tool reception | SDS-Max |
| Supplied in | Kitbox |
| Weight (kg) | 11,8 |
| Article Number | 4935412440 |
| EAN Code | 4002395198931 |





KH 7E

KH 7E

PM 10E

PN 11E



AEG

AC DRILLING RANGE

AEG

2-SPEED PERCUSSION DRILL

- 1100 watt powerful 2 speed percussion drill
- Anti vibration system for better comfort of use
- Large metal gear case for maximum durability
- 13mm metal chuck

Power input (W)

No load speed (rpm)

Max. torque (Nm)

Chuck type

Supplied in

Weight (kg)

EAN Code

Article Number

Chuck capacity (mm)

Ergonomic soft-grip design for comfort

Max. drilling wood/ steel/ masonry/ concrete (mm)

2-SPEED PERCUSSION DRILL

- 850 watt powerful 2 speed percussion drill
- 10mm shorter than the previous version (235mm OAL)
- Large switch with speed dial for stationary drilling or light mixing
- Large metal gear case for maximum durability
- 13mm metal chuck
- Ergonomic soft-grip design for comfort





4

SB2E 850 R

002395 294152

| | SB2E 850 R |
|---|---------------------|
| Power input (W) | 850 |
| No load speed (rpm) | 0 - 1000 / 0 - 3000 |
| Max. drilling wood/ steel/ masonry/ concrete (mm) | 40 / 13 / 22 / 20 |
| Max. torque (Nm) | 56 |
| Chuck capacity (mm) | 13 |
| Chuck type | Keyless |
| Supplied in | Kitbox |
| Weight (kg) | 2,7 |
| Article Number | 4935447360 |
| EAN Code | 4002395294152 |

SB2E 1100 RV 1100

0 - 1000 / 0 - 3200

40 / 13 / 24 / 22

60

13

Keyless

Kitbox

4935447375

4002395294176

2.9




SB2E 1100 RV

SB2E 750 RX S1

HIGH TORQUE PERCUSSION DRILL

• Compact and powerful 750 watt high torque percussion drill

- 62Nm torque delivers complete power
- IMB Integrated-Metal-Block technology for highest durability and stability
- 2-speed gearbox with synchromesh gear lever
- Variable speed control with speed dial, forward and reverse mechanism
- Easy access to carbon brushes via removal of soft-grip rubber
- Hammer action stop for rotary drilling
- 13mm metal keyless chuck
- Supplied with a side handle, metal depth gauge and a 4m cable

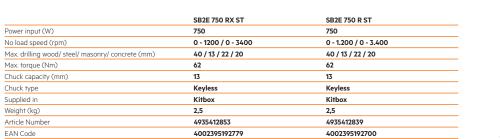

SB2E 750 RX ST SB2



SBE 750 RE

1-SPEED PERCUSSION DRILL

- Compact and powerful 750 watt motor
- Speed dial and lock on trigger button for stationary drilling
- High drilling speed at 3000rpm
- IMB design for more durability
- Reinforced 2 sleeve 13mm chuck
- Rubber overmold with micro texture for a perfect handling



SBE 750 RE

| | SBE 750 RE | SBE 750 RZ | |
|---|-------------------|-------------------|--|
| Power input (W) | 750 | 750 | |
| No load speed (rpm) | 0 - 3000 | 0 - 3000 | |
| Max. drilling wood/ steel/ masonry/ concrete (mm) | 30 / 13 / 20 / 16 | 30 / 13 / 20 / 16 | |
| Max. torque (Nm) | 27 | 27 | |
| Chuck capacity (mm) | 1,5 - 13 | 1,5 - 13 | |
| Chuck type | Keyless | Keyed | |
| Supplied in | Kitbox | Tool bag | |
| Weight (kg) | 1,9 | 1,9 | |
| Article Number | 4935442850 | 4935442840 | |
| EAN Code | 4002395247875 | 4002395247868 | |



1-SPEED PERCUSSION DRILL

- Powerful 705 watt motor
- Speed dial on the switch with lock on button
- Fast drilling speed at 2800rpm
- IMB design for more durability
- High quality 13mm metal chuck
- Rubber overmold with micro texture for a perfect handling

| | SBE 705 RE |
|---|-------------------|
| Power input (W) | 705 |
| No load speed (rpm) | 0 - 2800 |
| Max. drilling wood/ steel/ masonry/ concrete (mm) | 30 / 13 / 20 / 15 |
| Max. torque (Nm) | 25 |
| Chuck capacity (mm) | 13 |
| Chuck type | Keyless |
| Supplied in | Tool bag |
| Weight (kg) | 1,9 |
| Article Number | 4935442830 |
| EAN Code | 4002395247851 |







SBE 705 RE

SBE 750 RZ

DRY DIAMOND DRILL

- Powerful 1500 watt motor
- High performance 2-speed dry diamond drill
- Dual protection with interlinked mechanical and electronic clutches for safety
- Robust construction and full metal gearbox for durability
- 2-speed gear box
- Electronics with soft start for precision drilling and motor overload protection
- Soft hammer mode
- Supplied with a handle

| | DB 1500-2XE |
|----------------------------|---------------------|
| Power input (W) | 1500 |
| No load speed (rpm) | 0 - 1500 / 0 - 3000 |
| Spindle size | M 18 x 2,5 |
| Max. drilling masonry (mm) | 162 |
| Supplied in | Kitbox |
| Weight (kg) | 4,2 |
| Article Number | 4935412475 |
| EAN Code | 4002395198955 |
| | |

WALL CHASER

- Powerful 1500 watt motor
- · Electronics with thermal overload protection and soft start
- Variable and adjustable cutting depth for accurate results
- Variable cutting width for versatility
- Bayonet adaptor for dust extraction
- Spindle lock
- Supplied with a 4m cable, special break out chisel, front handle, suction adaptor and a spanner

| MFE 1500 | |
|---------------|--|
| 1500 | |
| 125 | |
| 0 - 9500 | |
| 8 - 26 | |
| Kitbox | |
| 4,1 | |
| 4935413605 | |
| 4002395192809 | |
| | 1500 125 0 - 9500 8 - 26 Kitbox 4,1 4935413605 |

DRYWALL SCREWDRIVER

- Powerful 720 watt motor for increased productivity
- Compact high speed screwdriver for drywall applications
- Full metal gearbox for durability
- Easily adjustable depth-setting nosepiece for consistent fastener depth
- Forward and reverse mechanism
- Ergonomic design and soft-grip for comfortable handling
- ¼" Hex bit reception
- Belt clip
- Supplied with a depth gauge, bit holder, PH 2 bit, belt clip and a 4m cable

| | S 4000E |
|---------------------|---------------------------|
| Power input (W) | 720 |
| No load speed (rpm) | 0 - 4000 |
| Drywall screws [mm] | 5 |
| Max. torque (Nm) | 10 |
| Tool reception | ¼" Hex |
| Supplied in | No kitbox or bag supplied |
| Weight (kg) | 1,4 |
| Article Number | 4935413215 |
| EAN Code | 4002395197637 |
| | |





MFE 1500





AEG

AC METALWORKING RANGE

SMALL ANGLE GRINDER

WS <u>8-115</u> S

WS 8-115S

WS 8-125S

WS 10-115 S

WS 8-125 S

- Powerful 800 watt motor
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Metal gearbox for durability
- Directed air exhaust
- Gear head rotates at 90° intervals for added versatility
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
 Protected air inlets
- Protected air
 Spindle lock
- Spindle lock
- Supplied with an additional handle, flange, flange nut and spanner



| | WS 8-115S | |
|-------------------------|---------------|--|
| Power input (W) | 800 | |
| No load speed (rpm) | 12.000 | |
| Max. cutting depth (mm) | 26 | |
| Disc diameter (mm) | 115 | |
| Spindle size | M14 | |
| Weight (kg) | 1,9 | |
| Supplied in | Gift box | |
| Article Number | 4935451293 | |
| EAN Code | 4002395150519 | |

SMALL ANGLE GRINDER

- Powerful 800 watt motor
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Metal gearbox for durability
- Directed air exhaust
- Gear head rotates at 90° intervals for added versatility
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
- Protected air inlets
- Spindle lock
- Supplied with an additional handle, flange, flange nut and spanner



WS 8-125SK

| | WS 8-125SK | WS 8-125S |
|-------------------------|---------------|---------------|
| Power input (W) | 800 | 800 |
| No load speed (rpm) | 12.000 | 12.000 |
| Max. cutting depth (mm) | 31 | 31 |
| Disc diameter (mm) | 125 | 125 |
| Spindle size | M14 | M14 |
| Weight (kg) | 1,9 | 1,9 |
| Supplied in | Kitbox | Gift box |
| Article Number | 4935451298 | 4935451296 |
| EAN Code | 4002395150564 | 4002395150540 |
| | | |

SMALL ANGLE GRINDER

- Powerful 1000 watt motor with outstanding performance
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and working in restricted areas
- Optimised cooling slots prevent overheating, even when blocked occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Spindle lock
- Supplied with a AVS side handle, keyless safety guard, flange, flange nut and spanner

| WS 10-115 S |
|---------------|
| 1000 |
| 11.500 |
| 26 |
| 115 |
| M14 |
| 2,3 |
| |
| 4935451300 |
| 4002395150588 |
| |





SMALL ANGLE GRINDER

WS 10-125 S

WS 10-125 SK

WS 12-125 S

- Powerful 1000 watt motor with outstanding performance
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Spindle lock
- Supplied with a AVS side handle, keyless safety guard, flange, flange nut and spanner



WS 10-125 S

| | WS 10-125 S | WS 10-125 SK | |
|-------------------------|---------------|---------------|--|
| Power input (W) | 1000 | 1000 | |
| No load speed (rpm) | 11.500 | 11.500 | |
| Max. cutting depth (mm) | 31 | 31 | |
| Disc diameter (mm) | 125 | 125 | |
| Spindle size | M14 | M14 | |
| Weight (kg) | 2,3 | 2,3 | |
| Supplied in | Gift box | Kitbox | |
| Article Number | 4935451302 | 4935451303 | |
| EAN Code | 4002395151202 | 4002395151219 | |

SMALL ANGLE GRINDER

- Powerful 1200 watt motor with outstanding performance
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocked occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Spindle lock
- Supplied with an AVS side handle, keyless safety guard, flange, flange nut and spanner



| Power input (W) | 1200 | 1200 | |
|-------------------------|---------------|---------------|--|
| | | | |
| No load speed (rpm) | 11.500 | 11.500 | |
| Max. cutting depth (mm) | 31 | 31 | |
| Disc diameter (mm) | 125 | 125 | |
| Spindle size | M14 | M14 | |
| Weight (kg) | 2,4 | 2,4 | |
| Supplied in | Kitbox | Gift box | |
| Article Number | 4935451307 | 4935451306 | |
| EAN Code | 4002395151257 | 4002395151240 | |



WS 13-125 SXE

SMALL ANGLE GRINDER

- Powerful 1300 watt motor with outstanding performance
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Variable speed electronics for lower speed setting especially in finishing applications
- Constant speed for best performance and high torque, even in lower speed applications
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocked occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment

| | WS 13-125 SXE | WS 13-125 SXEK |
|-------------------------|---------------|----------------|
| Power input (W) | 1300 | 1300 |
| No load speed (rpm) | 2800 - 11.500 | 2800 - 11.500 |
| Max. cutting depth (mm) | 40 | 40 |
| Disc diameter (mm) | 125 | 125 |
| Spindle size | M14 | M14 |
| Weight (kg) | 2,4 | 2,4 |
| Supplied in | Gift box | Kitbox |
| Article Number | 4935451309 | 4935451310 |
| EAN Code | 4002395151271 | 4002395151288 |







LARGE ANGLE GRINDER

WS 15-125 SX

- Powerful 1520 watt motor
- DIGITRONIC with constant speed electronics, soft start, motor overload protection and no load speed limitation
- FIXTEC patented nut for fast and easy disc changing
- Automatic cut-off, easy change carbon brushes
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
- Epoxy coating field and armature combat abrasive dust to increase tool lifetime
- New "snap-in" safety guard for keyless adjustment
- Spindle lock, with safety mechanism
- Large surface safety switch



| | WS 15-125 SX | |
|-------------------------|---------------|--|
| Power input (W) | 1520 | |
| No load speed (rpm) | 11.000 | |
| Max. cutting depth (mm) | 35 | |
| Disc diameter (mm) | 125 | |
| Spindle size | M14 | |
| Weight (kg) | 2,5 | |
| Supplied in | Gift box | |
| Article Number | 4935455100 | |
| EAN Code | 4002395247264 | |





LARGE ANGLE GRINDER

- · Powerful 2200 watt motor with powder field coating for long life time and outstanding performance in all applications
- Extreme compact design with an overall short length of 485mm and 5.1kg for most comfortable handling
- Line lock out function to prevent automatic start up after power loss
- Soft start for smooth start up
- Burst resistant keyed safety guard
- External brush doors for easy access to the brushes for fast servicing
- Supplied with a cable, wrench, flange, flange nut, anti-vibration addition handle and a safety guard



| | WS 22-180 E | |
|-------------------------|---------------|--|
| Power input (W) | 2200 | |
| No load speed (rpm) | 8500 | |
| Max. cutting depth (mm) | 45 | |
| Disc diameter (mm) | 180 | |
| Spindle size | M14 | |
| Deadman switch | No | |
| Weight (kg) | 5,1 | |
| Supplied in | Gift box | |
| Article Number | 4935431690 | |
| EAN Code | 4002395194858 | |



LARGE ANGLE GRINDER

WS 22-230

- Powerful 2200 watt motor with powder field coating for long life time and outstanding performance in all applications
- Extremely compact design with an overall short length of 485mm and 5.1kg for most comfortable handling
- Line lock out function to prevent automatic startup after power loss
- Burst resistant keyed safety guard
- External brush doors for easy access to the brushes for fast servicing
- Supplied with a cable, wrench, flange, flange nut, anti-vibration additional handle and a safety guard



| | WS 22-230 E | WS 22-230 DMS |
|-------------------------|---------------|---------------|
| Power input (W) | 2200 | 2200 |
| No load speed (rpm) | 6600 | 6600 |
| Max. cutting depth (mm) | 68 | 68 |
| Disc diameter (mm) | 230 | 230 |
| Spindle size | M14 | M14 |
| Deadman switch | No | Yes |
| Weight (kg) | 5,2 | 5,2 |
| Supplied in | Gift box | Gift box |
| Article Number | 4935431720 | 4935431730 |
| EAN Code | 4002395194889 | 4002395194902 |





Δ

AEG

WS 24-230 GE\

LARGE ANGLE GRINDER

- · Powerful 2400 watt motor with powder field coating for long life time and outstanding performance in all applications
- Extremely compact design with an overall short length of 515mm and 5.6kg for most comfortable handling
- Line lock out function to prevent automatic start up after power loss
- Soft start for smooth start up
- Burst resistant quick release safety guard for easy adjustment
- AVS equipped motor housing and 2-positions Anti-vibration side handle for less vibrations
- 7 step rotating main handle and large soft grip area for most comfortable handling
- External brush doors for easy access to the brushes for fast servicing
- 4m rubber cable
- Supplied with a wrench, flange, flange nut, anti-vibration additional handle and a safety guard

| WS 24-230 GEV | WS 24-230 GV DMS |
|---------------|---|
| 2400 | 2400 |
| 0 - 6600 | 0 - 6600 |
| 68 | 68 |
| 230 | 230 |
| M14 | M14 |
| No | Yes |
| 5,6 | 5,6 |
| Kitbox | Kitbox |
| 4935431765 | 4935431775 |
| 4002395194964 | 4002395194971 |
| | 2400 0 - 6600 68 230 M14 No 5,6 Kitbox 4935431765 |





DIE GRINDER

- High speed, one handed die grinder
- Variable speed electronic
- Automatic cut-off carbon brushes
- High rotation precision metal gearboxWeight only 1.3kg
- Ergonomic switch
- Supplied with a key, 6mm collect and a 4m cable



| | GS 500 E |
|-----------------------------------|-----------------|
| Power input (W) | 500 |
| No load speed (rpm) | 10.000 - 29.000 |
| Collet capacity (mm) | 6 |
| Max. grinding wheel diameter (mm) | 40 |
| Max. grinding pin diameter (mm) | 20 |
| Weight (kg) | 1,3 |
| Supplied in | Gift box |
| Article Number | 4935412985 |
| EAN Code | 4002395192939 |



GSL 600 E

DIE GRINDER

- Variable speed electronics
- Long spindle for easy access to awkward places
- Double bearing spindle seating for smooth rotation
- Automatic cut-off carbon brushes
- High rotation precision metal gearbox
- Weight only 1.9kg
- Ergonomic switch
- Supplied with a key, 6mm collect and a 4m cable



| | GSL 600 E |
|-----------------------------------|-----------------|
| Power input (W) | 600 |
| No load speed (rpm) | 10.000 - 29.000 |
| Collet capacity (mm) | 6 |
| Max. grinding wheel diameter (mm) | 40 |
| Max. grinding pin diameter (mm) | 20 |
| Weight (kg) | 1,9 |
| Supplied in | Gift box |
| Article Number | 4935412965 |
| EAN Code | 4002395192946 |



POLISHER

PE 150

- 1200 watt polisher
- Variable speed electronics for various materials and finishes
- Special gearing for high spindle torque and ideal polishing speed
- Automatic cut-off carbon brushes
- Externally accessible brushes for easy replacement
- Spindle lock
- Large 3 finger switch
- Supplied with a 4m cable, additional handle, cap and a backing pad



| | PE 150 | |
|---------------------|---------------|--|
| Power input (W) | 1200 | |
| No load speed (rpm) | 900 - 2500 | |
| Disc diameter (mm) | 150 | |
| Spindle size | M14 | |
| Weight (kg) | 2,1 | |
| Supplied in | Gift box | |
| Article Number | 4935412266 | |
| EAN Code | 4002395198443 | |
| | | |





RIGHT ANGLE SANDER

- 1200 watt sander with full wave electronics
- Variable speed electronics for various materials and finishing
- High motor torque and optimum speed range for sanding, especially for fine surface work
- Automatic cut-off carbon brushes
- Externally accessible brushes for easy replacement
- Spindle lock
- Large 3 finger switch
- Supplied with a 4m cable, additional handle with guard, flange nut and a flexible backing pad



| | SE 12-180 | |
|---------------------|---------------|--|
| Power input (W) | 1200 | |
| No load speed (rpm) | 1800 - 4800 | |
| Disc diameter (mm) | 180 | |
| Spindle size | M14 | |
| Weight (kg) | 2,5 | |
| Supplied in | Gift box | |
| Article Number | 4935412279 | |
| EAN Code | 4002395198481 | |
| | | |



METAL CHOPSAW

- Powerful 2300 watt motor
- - 45°/0°/45° mitre capacity with quick release mitre clamp
- Spindle lock for easy wheel and accessory changing
- Deflector protects the user from sparks
- Oversize guard for added safety
- On board wrench storage
- Rubber feet for greater stability
- Replaceable carbon brushes
- Supplied with a 4m cable, 355mm cutting disc and a spanner

| | SMI 355 |
|---------------------|---------------|
| Power input (W) | 2300 |
| No load speed (rpm) | 4280 |
| Wheel size (mm) | 355 |
| Bore size (mm) | 25,4 |
| Weight (kg) | 16,5 |
| Supplied in | Gift box |
| Article Number | 4935411770 |
| EAN Code | 4002395129638 |
| | |

SMT 355





SE 12-180

AC WOODWORKING RANGE

AEG

300W MULTI-TOOL

- Tool free interchangeable heads to easily switch between a wide range of applications
- Large 2 finger switch with adjustable speed
- Range of one handed applications
- LED for work place illumination



| | OMNI 300 KIT1 |
|-----------------------------------|----------------------------------|
| Power input (W) | 300 |
| Oscillation rate (opm) | 20.000 |
| Oscillation angle left/ right (°) | 2,0 |
| Standard equipment | 1 x multi-tool head, accessories |
| Weight (kg) | 2,52 |
| Supplied in | Tool bag |
| Article Number | 4935431790 |
| EAN Code | 4002395194995 |

1600W, 190MM CIRCULAR SAW

- Powerful 1600 watt motor
- 0-56 degree bevel capacity with 45 degree positive stop
- Durable and stable die cast shoe and guard
- Large action levers for easy operating
- Micro texture grip on front and back handle
- 4m cable
- Dust port with DEK 26 connection to our AEG dust extractors

| | KS 66-2 | |
|-----------------------------|---------------|--|
| Power input (W) | 1600 | |
| Blade diameter (mm) | 190 | |
| Bevel capacity (°) | 56 | |
| Max. cutting depth 45° (mm) | 47 | |
| Max. cutting depth 90° (mm) | 64 | |
| No load speed (rpm) | 0 - 5800 | |
| Arbor size (mm) | 30 | |
| Weight (kg) | 4,8 | |
| Supplied in | Tool bag | |
| Article Number | 4935446675 | |
| EAN Code | 4002395136339 | |
| | | |

1500W, 190MM CIRCULAR SAW

- Powerful 1500 watt motor
- 64mm Max depth of cut
- 0 45° bevel capacity
- Durable die cast shoe and guard
- Large action levers for easy operating
- Micro texture grip for use comfort
- 2m cable
- Dust port extraction point

| | KS 15-1 |
|-----------------------------|---------------|
| Power input (W) | 1500 |
| Blade diameter (mm) | 190 |
| Bevel capacity (°) | 45 |
| Max. cutting depth 45° (mm) | 47 |
| Max. cutting depth 90° (mm) | 62 |
| No load speed (rpm) | 0 - 5000 |
| Arbor size (mm) | 30 |
| Weight (kg) | 4,2 |
| Supplied in | Gift box |
| Article Number | 4935472007 |
| EAN Code | 4058546324032 |





KS 15-1





OMNI 300

OMNI 300 KIT1



1200W, 190MM CIRCULAR SAW

- Powerful 1200 watt motor
- 64mm max depth of cut
- 0 45° bevel capacity
- Durable steel shoe and die cast guard
- Large action levers for easy operating
- Micro texture grip for comfortable use2m cable
- Dust port extraction point
- KS 12-1 Power input (W) 1200 Blade diameter (mm) 190 45 Bevel capacity (°) Max. cutting depth 45° (mm) 47 Max. cutting depth 90° (mm) 62 0 - 5000 No load speed (rpm) Arbor size (mm) 30 Weight (kg) 3,7 Supplied in Gift box

4935472006 4058546324025

TOPHANDLE JIGSAW

• Powerful 600 watt motor

Article Number

Power input (W)

Stroke length (mm) Pendulum settings

Weight (kg)

Supplied in

EAN Code

Article Numbe

No load stroke rate (spm) Mitre capacity (°)

EAN Code

- Patented FIXTEC system for changing saw blades in seconds
- 4 stage pendulum adjustment
- Variable speed electronics for control
- Ergonomic top handle design with integrated soft-grip
- Sawdust blower keeps cutting line clear for accuracy
- Base plate can be moved backwards for sawing close to edges and for precise mitre cuts to 45°
- · Supplied with a 4 m cable, blade, anti-splintering guard, sliding shoe, dust cap and a suction adaptor

STEP 1200BX

110 / 10 / 30

4935412819

4002395192694

600 500 - 3000

45 26

4

2,4

Kitbox



| STEP 1200BX |
|-----------------|
| 4 002395 192694 |
| 4 002395 192694 |

TOPHANDLE JIGSAW

Max. cutting capacity wood/ steel/ aluminium (mm)

- Tophandle jigsaw with a new powerful 700 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 6-different speed settings for better cutting control
- Better ergonomic design with integrated soft-grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Keyless adjustment of the base plate for cutting close to edges and for precise Bevel cuts up to 45°
- Supplied with a 4m cable, blade, anti-splitering guard and dust cap

| | STEP 100X |
|---|---------------|
| Power input (W) | 700 |
| No load stroke rate (spm) | 1000 - 3200 |
| Mitre capacity (°) | 45 |
| Stroke length (mm) | 20 |
| Pendulum settings | 4 |
| Max. cutting capacity wood/ steel/ aluminium (mm) | 100 / 10 / 20 |
| Weight (kg) | 2,3 |
| Supplied in | Kitbox |
| Article Number | 4935451000 |
| EAN Code | 4002395136513 |





KS 12-1



KS 12-1







TOPHANDLE JIGSAW

- Tophandle jigsaw with a new powerful 700 watt motor
- 6-different speed settings for better cutting control
- Better ergonomic design with integrated soft-grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Supplied with a 4m cable, blade, anti-splitering guard and dust cap

-

STEP 100



| | STEP 100 |
|---|---------------|
| Power input (W) | 700 |
| No load stroke rate (spm) | 1000 - 3200 |
| Mitre capacity (°) | 45 |
| Stroke length (mm) | 20 |
| Pendulum settings | 4 |
| Max. cutting capacity wood/ steel/ aluminium (mm) | 100 / 10 / 20 |
| Weight (kg) | 2,2 |
| Supplied in | Gift box |
| Article Number | 4935451001 |
| EAN Code | 4002395136520 |

TOPHANDLE JIGSAW

- Tophandle jigsaw with a new powerful 700 watt motor
- 6-different speed settings for better cutting control
- Better ergonomic design with integrated soft-grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Supplied with a 4m cable, blade, anti-splitering guard and dust cap

| | STEP 80 |
|---|---------------------------|
| Power input (W) | 700 |
| No load stroke rate (spm) | 1000 - 3200 |
| Mitre capacity (°) | 45 |
| Stroke length (mm) | 20 |
| Pendulum settings | 4 |
| Max. cutting capacity wood/ steel/ aluminium (mm) | 80 / 10 / 20 |
| Weight (kg) | 2.2 |
| Supplied in | No kitbox or bag supplied |
| Article Number | 4935451161 |
| EAN Code | 4002395138302 |
| | |









BODYGRIP JIGSAW

- Powerful 730 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4 stage pendulum adjustment
- Variable speed selection for correct speed to match the material and blade
- Soft start prevents sudden kick back of machine on start up
- Integrated electronics allows constant speed under load
- Ergonomic and very slim body grip design with integrated soft-grip zone
- Dust extraction port
- Sawdust blower keeps cutting line clear for accuracy
- Adjustable dust extraction (front or back) over switch

| | STEP 1200XE |
|---|---------------|
| Power input (W) | 730 |
| No load stroke rate (spm) | 500 - 3000 |
| Mitre capacity (°) | 45 |
| Stroke length (mm) | 26 |
| Pendulum settings | 4 |
| Max. cutting capacity wood/ steel/ aluminium (mm) | 135 / 10 / 30 |
| Weight (kg) | 2,4 |
| Supplied in | Kitbox |
| Article Number | 4935412878 |
| EAN Code | 4002395192762 |
| | |

BODYGRIP JIGSAW

- Powerful 705 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4 stage pendulum adjustment
- Variable speed electronics for control
- Ergonomic slimline bodygrip design with integrated soft grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Base plate can be moved backwards for cutting close to edges
- Supplied with a 4m cable, blade, anti-splintering guard, sliding shoe and a dust cap





ST 800XE

ST 800XE

PST 500X



| | ST 800XE |
|---|---------------|
| Power input (W) | 705 |
| No load stroke rate (spm) | 600 - 2700 |
| Mitre capacity (°) | 45 |
| Stroke length (mm) | 26 |
| Pendulum settings | 4 |
| Max. cutting capacity wood/ steel/ aluminium (mm) | 110 / 10 / 25 |
| Weight (kg) | 2,3 |
| Supplied in | Kitbox |
| Article Number | 4935412950 |
| EAN Code | 4002395192892 |



- Powerful 440 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- LED light for cut line visibility
- Pendulum function
- Unique palm design for use in tight spaces and easy handling
- Dust blower keeps cut line clear for accuracy
- Supplied with a clear dust cap, splintering device, 1 saw blade and a 4m cable

| | PST 500X |
|---|---------------|
| Power input (W) | 450 |
| No load stroke rate (spm) | 3700 |
| Mitre capacity (°) | 45 |
| Stroke length (mm) | 15 |
| Pendulum settings | 1 |
| Max. cutting capacity wood/ steel/ aluminium (mm) | 40 / 6 / 10 |
| Weight (kg) | 2,3 |
| Supplied in | Tool bag |
| Article Number | 4935428260 |
| EAN Code | 4002395194315 |





STEP 1200XE

COMBO ROUTER

- 2 routers in one for maximum flexibility in all kinds of application
- Soft start to prevent sudden kickback
- Integrated electronics maintain constant speed under load
- Variable speed electronics for optimum control in a wide range of materials
- Large soft-grip handles for decreased vibration and greater comfort
- Flat motor housing with integrated rubber feet for convenient upside down bit change with spindle lock
- Premium collet and shaft design minimises run out
- Built in LED for unparalleled workplace illumination
- Through table depth adjustment for ultimate convenience
- Supplied with 5 guide bushes, 3 dust extraction adaptors, parallel guide, 2 collects (8/12mm) 2 keys, oval base, round base and a chip shield



MF 1400KE

| | MF 1400KE | |
|----------------------|-----------------|--|
| Power input (W) | 1400 | |
| Collet capacity (mm) | 8 / 12 | |
| Plunge capacity (mm) | 64 | |
| No load speed (rpm) | 10.000 - 23.000 | |
| Weight (kg) | 5,7 | |
| Supplied in | Tool bag | |
| Article Number | 4935411850 | |
| EAN Code | 4002395193295 | |
| | | |





82MM PLANER

- Powerful 700 watt motor to power through the toughest timber
- Changeable left or right chip ejection
- Lockable kickstand on the base of the tool protects material from accidental damages
- 0.2mm fine depth adjustment for detialed applications
- 82mm dual reversible cutting blades
- Powerful brushed motor delivers up to 17000rpm to achieve proffesional surface finish.



| | PL 700 | |
|-------------------------|---------------|--|
| Power input (W) | 700 | |
| No load speed (rpm) | 17.000 | |
| Max. cutting depth (mm) | 3 | |
| Cutting width (mm) | 82 | |
| Rebate depth (mm) | 12 | |
| Weight (kg) | 2,6 | |
| Supplied in | Gift box | |
| Article Number | 4935472008 | |
| EAN Code | 4058546324049 | |



PL 700

RECIPROCATING SAW

US 900 XE

US 900 XE

US 1300 XE

- Powerful 900 watt motor, for fast cuts in various materials
- Pendulum function with 19mm stroke length, for more powerful and faster cutting progress
- Speed regulation from 0 3500spm, especially needed for heat-sensitive materials
- FIXTEC for fast and easy keyless blade change
- 24 % lighter than other saws, for better work control
- One hand blade insertion
- Soft grip handle, for better ergonomics
- Supplied with a 4m cable and 2 blades



| | US 900 XE | |
|---------------------------|---------------|--|
| Power input (W) | 900 | |
| No load stroke rate (spm) | 0 - 3500 | |
| Stroke length (mm) | 19 | |
| Weight (kg) | 2,9 | |
| Supplied in | Tool bag | |
| Article Number | 4935419610 | |
| EAN Code | 4002395193806 | |

RECIPROCATING SAW

- Powerful 1300 watt motor
- FIXTEC blade clamp for fast and easy blade changes
- Variable speed switch for increased cutting control and efficiency
- Adjustable shoe for prolonged blade life
- Ergonomic soft grip handle design for comfort
- Blades can be turned 180° for various applications
- Supplied with a 4m cable and 2 blades



| | US 1300 XE | |
|---------------------------|---------------|--|
| Power input (W) | 1300 | |
| No load stroke rate (spm) | 0 - 2800 | |
| Stroke length (mm) | 30 | |
| Weight (kg) | 3,8 | |
| Supplied in | Kitbox | |
| Article Number | 4935413235 | |
| EAN Code | 4002395197675 | |



FDS 140

PALM DELTA SANDER

- Extremely compact 260 watt sheet sander
- Ideal for working in confined spaces and over head
- Delta base for sanding in corners
- Hook & loop and large release tabs for convenient paper changing
- Magnesium base for more stability and less vibration
- Dust extraction with dust bag or absorption system
- Soft-grip on handle
- Supplied with a 4m cable, 3 sheets (60, 80, 120 grit) sanding pad, delta base plate and dust bag





| | FDS 140 |
|---------------------------|---------------|
| Power input (W) | 260 |
| No load speed (rpm) | 14.000 |
| Oscillation rate (opm) | 20.000 |
| Oscillation diameter (mm) | 1,6 |
| Sanding pad size (mm) | 115 x 140 |
| Weight (kg) | 1,5 |
| Supplied in | Gift box |
| Article Number | 4935416090 |
| EAN Code | 4002395129768 |
| | |

1/3 SHEET SANDER

- Variable speed setting for increasing or decreasing sanding speed
- Sanding plate with velcro type attachment
- Lock-on switch designed to easily lock trigger in place during extended tool operation •
- Wide trigger for convenient 2-finger on/off operation of tool
- Removable duct collection bag ensures efficient collection of dust residue
- Hex grip micro texture for maximum user comfort
- Front auxiliary grip ensures maximum user control and optimum distribution of force during sanding
- Supplied with 2m cable

FOSVS



| FS 250 |
|---------------|
| 250 |
| 6000-12.000 |
| 90x187 |
| 1,8 |
| Gift box |
| 4935472164 |
| 4058546325602 |
| |

1/2 SHEET SANDER

- Powerful 500 watt motor
- Variable speed for optimum control
- Convenient hook & loop paper fastening
- Dust extraction, with dustbag or absorption system
- Supplied with a 4m cable, 3 sheets (80, 120, 240 grit) sanding pads, dust bag and a pommel handle



| | FS 280 | |
|------------------------|-----------------|--|
| Power input (W) | 500 | |
| Oscillation rate (opm) | 14.000 - 26.000 | |
| Sanding pad size (mm) | 115 x 280 | |
| Weight (kg) | 3,0 | |
| Supplied in | Gift box | |
| Article Number | 4935419280 | |
| EAN Code | 4002395133116 | |

RANDOM ORBIT SANDER

- . Ergonomic & compact 300 watt random orbit sander
- Ideal for working in confined spaces and over head
- Variable speed for optimum control
- Pad brake control: pad brake for a gauge free workpiece
- Convenient hook & loop paper fastening
- Very efficient dust extraction over 8 holes in the base plate
- Dust extraction, with dust bag or absorption system
- Soft-grip on handle
- Supplied with a 4m cable, sheets (80, 120, 180 grit) sanding pads and a dust bag







FS 250

FS 250

4 0585261336230

FS 280

FS 280



EX 125 ES

RANDOM ORBIT SANDER

EX 150 ES

EX 150 ES

HBS 1000 E

- Dual orbits for control of material removal
- Variable speed for optimum control
- Soft start and pad brake for a gauge free workpiece
- Through-body sealed slide switch for reliability and ease of use
- Convenient hook & loop paper fastening
- Dust extraction, with dust bag or absorption system
- Diecast construction for strength and durability
- Micro texture grip for perfect handling
- Supplied with a 4m cable, 3 x 80 grit sanding pads, dust bag and a pommel handle



| | EX 150 ES |
|---------------------------|---------------|
| Power input (W) | 440 |
| No load speed (rpm) | 4000 - 10.000 |
| Oscillation rate (opm) | 8000 - 20.000 |
| Oscillation diameter (mm) | 3,2 / 6,4 |
| Sanding pad size (mm) | 150 |
| Weight (kg) | 2,8 |
| Supplied in | Gift box |
| Article Number | 4935443290 |
| EAN Code | 4002395135479 |

BELT SANDER

- Powerful 1010 watt motor
- Electronic speed for control and optimum results
- Clamping lever for easy, tool free changing of sanding belt
- Externally accessible brushes for easy replacement
- Control wheel for precise adjustment of sanding belt
- Compact design, ideal for sanding close to edges
- Die-cast construction for high strength and durability
- Dust extraction, with dust bag or absorption system
- Supplied with a 4m cable, 1 x 80 grit sanding belt, dust bag and a pommel handle



| HBS 1000 E |
|---------------|
| 1010 |
| 533 |
| 240 - 450 |
| 75 x 145 |
| 75 |
| 5,1 |
| Kitbox |
| 4935413205 |
| 4002395197613 |
| |



- Powerful 1100 watt motor
- Extra-large sanding surface 100 x 140mm
- Full-wave electronics with pre-selection of belt speed
- Control wheel for precise adjustment of belt alignment
- Dust extraction, with dust bag or absorption system
- Supplied with a 4m cable, 1 x 100 grit sanding belt and a dust bag

BBSE 1100



BBSE 1100



Power input (W) 1100 230 - 400 Belt speed (rpm) Belt length (mm) 560 Belt width (mm) 100 100 x 140 Sanding surface (mm) Weight (kg) 5.0 Gift box Supplied in 4935413530 Article Number EAN Code 4002395199037



AFC

HEAT GUN

- 2 temperature adjustment modes 300° / 560°
- 253 4201/min
- Reinforced fan for continuous use
- Extremely light product 0.85kg
- Rubber overmold on back end for safe stationary use



HEAT GUN

- Electronic precise adjustment for temp from 90° up to 600°
- 345 434l/min
- Reinforced fan for continuous use
- Extremely light product 0.9kg
- Rubber overmold on back end for safe stationary use

| HG 600 V | HG 600 VK | |
|---------------|--|---|
| 2000 | 2000 | |
| 345 - 434 | 345 - 434 | |
| 90 - 600 | 90 - 600 | |
| 0,9 | 0,9 | |
| Gift box | Kitbox | |
| 4935441025 | 4935441035 | |
| 4002395135011 | 4002395135035 | |
| | 2000 345 - 434 90 - 600 0,9 Gift box 4935441025 | 2000 2000 345 - 434 345 - 434 90 - 600 90 - 600 0,9 0,9 Gift box Kitbox 4935441025 4935441035 |

1400W 216MM MITRE SAW

- 1400 watt motor delivers 5000rpm producing fast cuts through toughest material
- Cut line visability with LED light and laser
- Mitre lock out with detent plate
- Blade depth stop for trench cutting applications
- 50° mitre capacity / 45° bevel capacity
- Supplied with 40 tooth blade


| | PS 216 L | |
|---|---------------|--|
| Power input (W) | 1400 | |
| Blade diameter (mm) | 216 | |
| No load speed (rpm) | 5000 | |
| Mitre capacity left (°) | 50 | |
| Mitre capacity right (°) | 50 | |
| Max. cutting depth (mm) | 65 | |
| Mitre saw capacity 90° (mm) | 65 x 305 | |
| Max. cutting capacity 0 mitre/ 90 bevel [mm] | 65 x 305 | |
| Max. cutting capacity 45° mitre/ 90° bevel (mm) | 65 x 215 | |
| Max. cutting capacity 0 mitre/ 45 bevel [mm] | 36 x 305 | |
| Max. cutting capacity 45° mitre/ 45° bevel (mm) | 36 x 215 | |
| Weight (kg) | 16,5 | |
| Supplied in | Gift box | |
| Article Number | 4935440650 | |
| EAN Code | 4002395134656 | |



















1400W 216MM MITRE SAW

- 1400 watt motor delivers 5000rpm producing fast cuts through toughest material
- Cut line visability with LED light and laser
- Mitre lock out with detent plate
- Blade depth stop for trench cutting applications
- 50° Mitre capacity / -2° 47° Bevel capacity
- Supplied with 40 tooth blade

| | PS 216 L3 |
|---|---------------|
| Power input (W) | 1400 |
| Blade diameter (mm) | 216 |
| No load speed (rpm) | 5000 |
| Mitre capacity left (°) | 50 |
| Mitre capacity right (°) | 50 |
| Max. cutting depth (mm) | 65 |
| Mitre saw capacity 90° (mm) | 65x305 |
| Max. cutting capacity 0 mitre/ 90 bevel [mm] | 65x305 |
| Max. cutting capacity 45° mitre/ 90° bevel (mm) | 65x215 |
| Max. cutting capacity 0 mitre/ 45 bevel [mm] | 36x305 |
| Max. cutting capacity 45° mitre/ 45° bevel (mm) | 36x215 |
| Weight (kg) | 16,2 |
| Supplied in | Gift box |
| Article Number | 4935471981 |
| EAN Code | 4058546298807 |

1800W 254MM MITRE SAW

- Internal fan that removes 80% of the dust
- Cut line visibility Adjustable LED and laser
- Blade depth adjustment. Allows for trenching application
- Mitre lock with detent plate. Mitre: 50 left or right
- Powerful 1800 watt motor delivers 5000rpm
- Supplied with a 48 tooth blade, clamp, hose, bucket cover and a dust bag

| | PS 254 L |
|---|---------------|
| Power input (W) | 1800 |
| Blade diameter (mm) | 254 |
| No load speed (rpm) | 5000 |
| Mitre capacity left (°) | 50 |
| Mitre capacity right (°) | 50 |
| Max. cutting depth (mm) | 90 |
| Mitre saw capacity 90° (mm) | 305 |
| Max. cutting capacity 0 mitre/ 90 bevel [mm] | 90 x 305 |
| Max. cutting capacity 45° mitre/ 90° bevel (mm) | 90 x 215 |
| Max. cutting capacity 0 mitre/ 45 bevel [mm] | 50 x 305 |
| Max. cutting capacity 45° mitre/ 45° bevel (mm) | 50 x 215 |
| Weight (kg) | 19,5 |
| Supplied in | Gift box |
| Article Number | 4935440670 |
| EAN Code | 4002395134687 |









PS 254 L

PS 216 L3

4 058546 298807

UNIVERSAL MITRE SAW LEGSTAND

- Extendable to 2,3m
- Quick release brackets
- Adjustable leg
- Low weight 14kg
- 180kg maximum load capacity



| | PSU 1000 |
|-----------------------|---------------|
| Extendable up to (mm) | 2,3 |
| Bearing force (kg) | 180 |
| Weight (kg) | 14,0 |
| Article Number | 4935440850 |
| EAN Code | 4002395134892 |
| | |



DUST EXTRACTOR

- Clear press filters cleaning system
- "L" industry dust class
- PET Filter, with fleece filter bag
- Wet and dry cleaning
- Wet overfill protection
- Click system easy to change accessories
- Fleece double wall filter bag and disposal bag







| | AP2-200 ELCP |
|-------------------------|---------------|
| Power input (W) | 1000 |
| Air volume (l/min) | 3600 |
| Max. vacuum (mbar) | 210 |
| Container capacity (ml) | 20 |
| Hose diameter (mm) | 32 |
| Hose length (m) | 3,5 |
| Weight (kg) | 7,5 |
| Article Number | 4935447460 |
| EAN Code | 4002395294190 |



PSU 1000



ACCESSORIES RANGE

FC

AEG

BATTERIES

| 18V | Aics Moure9.0- | ALG | | NEW | NEW |
|----------------------------|----------------|---------------|---------------|---------------|---------------|
| | L1890RHD | L1860RHD | L1830RHD | L1840S | L1820S |
| Battery type | Li-ion | Li-ion | Li-ion | Li-ion | Li-ion |
| Battery pack capacity (Ah) | 9,0 | 6,0 | 3,0 | 4,O | 2,0 |
| Article Number | 4932464231 | 4932464754 | 4932471051 | 4935478636 | 4935472275 |
| EAN Code | 4058546221768 | 4058546226992 | 4058546286798 | 4058546348298 | 4058546339210 |

18V







| | L1850R | L1840R | L1820R |
|----------------------------|---------------|---------------|---------------|
| Battery type | Li-ion | Li-ion | Li-ion |
| Battery pack capacity (Ah) | 5,0 | 4,0 | 2,0 |
| Article Number | 4932451630 | 4932430170 | 4932430169 |
| EAN Code | 4002395140978 | 4002395378319 | 4002395378302 |

12V










| | L1260 | L1240 | L1230 | L1220 | L1215R | |
|----------------------------|---------------|---------------|---------------|---------------|---------------|--|
| Battery type | Li-ion | Li-ion | Li-ion | Li-ion | Li-ion | |
| Battery pack capacity (Ah) | 6.0 | 4,0 | 3,0 | 2,0 | 1,5 | |
| Article Number | 4932459181 | 4932430166 | 4932459180 | 4932430165 | 4932430365 | |
| EAN Code | 4002395288564 | 4002395378272 | 4002395288557 | 4002395378265 | 4002395380268 | |

12V









| SL 3.6 | | |
|---------------|--|--|
| Li-ion | | |
| 1,5 | | |
| 4932352969 | | |
| 4002395376278 | | |

CHARGERS

| | BL1418 | BL 18S | AL 18G | LL1240 |
|-----------------------------|---------------|---------------|---------------|---------------|
| Battery type | Li-ion | Li-ion | Li-ion | Li-ion |
| Charge rate (Amps per hour) | 4.1 | 2.0 | 2,0 | 4,O |
| Charging range | 14-18v | 18V | 18V | 12V |
| Article Number | 4932464542 | 4935472276 | 4932459891 | 4932430166 |
| EAN Code | 4058546224875 | 4058546339227 | 4058546030636 | 4002395378272 |

AEG SDS-PLUS 2-CUT DRILL BITS

- Fast Drilling- 2 cutter design offers the users a fast-drilling progress because of the big entrance gaps beside the tip.
- Durability- 2 Cutter Carbide Head for added durability and lifetime.
- Accuracy- Single Flute Design for accurate drilling

NEW

586

| Diameter (mm) | Total length (mm) | Working length (mm) | Quantity | Article Number | EAN Code |
|---------------|-------------------|---------------------|----------|----------------|---------------|
| 6 | 110 | 41 | 1 | 4932478681 | 4892210193063 |
| 6 | 160 | 91 | 1 | 4932478682 | 4892210193070 |
| 6 | 210 | 140 | 1 | 4932478683 | 4892210193087 |
| 6 | 260 | 185 | 1 | 4932478684 | 4892210193094 |
| 8 | 160 | 91 | 1 | 4932478685 | 4892210193100 |
| 8 | 210 | 140 | 1 | 4932478686 | 4892210193117 |
| 8 | 260 | 185 | 1 | 4932478687 | 4892210193124 |
| 8 | 460 | 365 | 1 | 4932478693 | 4892210193186 |
| 10 | 160 | 92 | 1 | 4932478688 | 4892210193131 |
| 10 | 210 | 140 | 1 | 4932478689 | 4892210193148 |
| 10 | 310 | 235 | 1 | 4932478690 | 4892210193155 |
| 10 | 460 | 365 | 1 | 4932478694 | 4892210193193 |
| 12 | 160 | 92 | 1 | 4932478691 | 4892210193162 |
| 12 | 210 | 140 | 1 | 4932478692 | 4892210193179 |
| 12 | 460 | 365 | 1 | 4932478695 | 4892210193209 |
| 16 | 460 | 365 | 1 | 4932478696 | 4892210193216 |
| 18 | 460 | 365 | 1 | 4932478697 | 4892210193223 |
| 20 | 460 | 365 | 1 | 4932478698 | 4892210193230 |
| 22 | 460 | 365 | 1 | 4932478699 | 4892210193247 |
| 24 | 460 | 365 | 1 | 4932478700 | 4892210193254 |

POWER SET SDS-PLUS DRILL BITS

- High quality 2 cutter carbide top with 130° tip angle
- The carbide tip is set deeper into the head for a more precise fit and better durability
- 2 flute geometry for rapid material removal
- Surface treated flute eliminates binging for faster drilling and high abrasion resistance

| | Afficie Nulliber | EAN Code |
|---|---------------------------------|---------------|
| Counter display (12 sets) SDS-Plus | 4932352315 | 4002395369744 |
| Single Power Set SDS-Plus Drill Bits (8pcs) | 4932352236 4002395368952 | |
| with Ø 5/6/8 x 110mm and Ø 6 (2pcs)/8/10/12 x 160mm | 4752552250 | 4002393308932 |

POWER SET STONE DRILL BITS

- Extra sharp diamond ground carbide tip with 130 degree angle
- Polished silver and black finish eliminates binding for faster cutting and material removal
- Made from special alloy steel for best precision and robustness
- High quality robust and compact power set with secure lock

| | Article Number | EAN Code |
|--|----------------|---------------|
| Counter display (6 sets) Stone | 4932352238 | 4002395368976 |
| Single Power Set Stone Drill Bits (10pcs) | 4932352239 | 4002395368983 |
| Contents: Ø 4/5/5.5/6 (2pcs)/7/8 (2pcs)/9/10mm | 4732332239 | 4002343308483 |

Article Number

EAN Code



- HSS-Rollforged metal drill bits manufactured according to DIN 338
- Oxide coating for improved swarf removal
- Normal point cutting tip with 118 degree angle
- Standard type N flute design

| | Article Number | EAN Code |
|---|----------------|---------------|
| Counter display (6 x sets) HSS-R | 4932352240 | 4002395368990 |
| Single Power Set HSS-R Drill Bits (19pcs) | | |
| Contents: Ø 2 x 49mm / Ø 2.5 (2pcs) x 57mm/ Ø 3 (2pcs) x 61mm/ Ø 3.5 (2pcs) x 70mm/ Ø 4 (2pcs) x 75mm/ Ø 4.5 (2pcs) x 80mm/ Ø 5 (2pcs) x 86mm/ Ø 6 (2pcs) x 93mm/ Ø 7 x 109mm/ Ø 8 x 117mm/ Ø 9 x 125mm/ Ø 10 x 133mm | 4932352241 | 4002395369003 |



POWER SET HSS-G (DIN 338) METAL DRILL BITS

- Fully ground drill bits according to DIN 338
- Standard tip for cutting geometry with 118° angle
- Standard type N flute design for faster chip removal and faster cutting
- High quality robust and compact power set with secure lock

| ······································ | Article Number | EAN Code |
|---|----------------|---------------|
| Counter display (6 x sets) HSS-G | 4932352242 | 4002395369010 |
| Single Power Set HSS-G Drill Bits (19pcs) | | |
| Contents: Ø 2 x 49mm / Ø 2.5 (2pcs) x 57mm/ Ø 3 (2pcs) x 61mm/ Ø 3.5 (2pcs) x 70mm/ Ø 4 (2pcs) x 75Contents: Ø 2 x 49 mm / Ø 2.5 (2pcs) x 57 mm/ Ø 3 (2pcs) x 61 mm/ Ø 3.5 (2pcs) x 70 mm/ Ø 4 (2pcs) x 75 mm/ Ø 4.5 (2pcs) x 80 mm/ Ø 5 (2pcs) x 86 mm/ Ø 6 (2pcs) x 93 mm/ Ø 7 x 109 mm/ Ø 8 x 117 mm/ Ø 9 x 125 mm/ Ø 10 x 133 mmm/ Ø 4.5 (2pcs) x 80mm/ Ø 5 (2pcs) x 86mm/ Ø 6 (2pcs) x 93mm/ Ø 7 x 109mm/ Ø 8 x 117mm/ Ø 9 x 125mm/ Ø 10 x 133mm | 4932332243 | 4002395369027 |



POWER SET HSS-G TIN DRILL BITS

- Metal drill bits ground from high speed steel according to DIN 338
- Normal point cutting tip with 118° angle
- Standard type N flute design
- Titanium nitride coating increases cutting speed by 50% and lifetime by 300%

| | Article Number | EAN Code |
|--|----------------|---------------|
| Counter display (6 x sets) HSS-G TiN | 4932352244 | 4002395369034 |
| Single Power Set HSS-G TiN Drill Bits (19pcs) | | |
| Contents: Ø 2 x 49mm / Ø 2.5 (2pcs) x 57mm/ Ø 3 (2pcs) x 61mm/ Ø 3.5 (2pcs) x 70mm/ Ø 4 (2pcs) x 75mm/ Ø 4.5 (2pcs) x 80mm/ Ø 5 (2pcs) x 86mm/ Ø 6 (2pcs) x 93mm/Ø 7 x 109mm/ Ø 8 x 117mm/ Ø 9 x 125mm/ Ø 10 x 133mm | 4932352245 | 4002395369041 |





POWER SET LIP & SPUR WOOD DRILL BITS

- Manufactured from chrome vanadium steel according to DIN 7487 E
- Center point guarantees precise positioning
- Sharpened shoulders provide for clean holes avoiding splintering
- High quality robust and compact power set with secure lock

| | Article Number | EAN Code |
|---|----------------|---------------|
| Counter display (6x sets) Lip and Spur Wood | 4932352246 | 4002395369058 |
| Single Power Set Lip & Spur Wood Drills Bits (8 pcs) | | |
| Contents: Ø 3 x 60mm / Ø 4 x 75mm/ Ø 5 x 85mm/ Ø 6 x 97mm/ Ø 7 x 104mm/ Ø 8 x 117mm/ Ø 9 x 120mm/ Ø 10 x 133mm | 4932352247 | 4002395369065 |



POWER SET HSS-G (DIN 338) METAL DRILL BITS & SCREWDRIVING BITS

- Metal drill bits ground from high speed steel according to DIN 338
- Normal point cutting tip with 118° angle
- Standard type N flute design
- Screwdriving bits are milled from S2 steel
- High quality robust and compact power set with secure lock

| | Article Number | EAN Code |
|--|----------------|---------------|
| Counter Display (6 x sets) HSS-G & Screwdriving Bits | 4932352248 | 4002395369072 |
| Single Power Set HSS-G & Screwdriving Bits (35pcs) | | |
| Contents: Ø 2/ 2.5/ 3/ 3.2/ 3.5/ 4/ 4.5/ 6/ 8/ 10mm, 25mm length: PH1 (2pcs)/ PH2 (2pcs)/ PH3 (2pcs)/ PZ1 (2pcs)/ PZ2 (2pcs)/ PZ3 (2pcs)/ TX10 (2pcs)/ TX15 (2pcs)/ TX20 (2pcs)/ TX25 (2pcs)/ TX30/ TX40, 50mm length: PH2/ PZ2, ¹ / ₄ " Hex magnetic bit holder | 4932352249 | 4002395369089 |



POWER SET JIGSAW BLADES FOR WOOD & METAL

- Wood applications: T144D Fast cutting T101B Very clean, splinter free cutting
- Metal applications: T118A Cutting of thin sheet material Ø 1.5-4 mm T118B cutting of thicker material 3-6 mm
- High quality robust and compact power set with secure lock

| | Article Number | EAN Code |
|--|----------------|---------------|
| Counter Display (6 X Sets) Jigsaw Blades | 4932352252 | 4002395369119 |
| Power Set 50pcs - jigsaw blades for wood and metal | 4932352253 | 4002395369126 |
| 10 x T 144 D/ 10 x T 101 B/ 15 x T 118 A/ 15 x T 188 B | 4752352253 | 4002342204120 |



POWER SET SCREWDRIVING BITS

- COLDfire* is a special hardening treatment for making metal stronger, tougher and more durable. This cryogenic process is a one-time
 permanent treatment affecting the entire screwdriving bit and it is not just a surface coating. The cryogenic process consists of two steps,
 firstly the bit is hardened by heating it up to 870° and then freezing the bit down to -148° using a dry nitrogen atmosphere. The result of
 this process is a bit with exceptional durability
- + 40% stronger bit tips hold their form and will accept higher torque forces
- + 45% longer life over the lifetime of a bit one can expect to drive 45% more screws

| | Article Number | EAN Code |
|---|----------------|---------------|
| Counter display (6x sets) Screwdriving Bits | 4932352254 | 4002395369133 |
| Single Power Set Screwdriving Bits (40pcs) Contents: 25mm length: PH1 / PH2 (2pcs)/ PH3 / PZ1 (2pcs)/ PZ2 (2pcs)/ PZ3 (2pcs)/ TX6/ TX7 / TX 8/ TX9/ TX10 (2pcs)/ TX15 (2pcs)/ TX20 (2pcs)/ TX25 (2pcs)/ TX30/ TX40/ Hex 3/ Hex 4/ Hex 5/ Hex 6/ SL 0.6 x 4.5/ SL 0.8 x 5.5/ SL 1.0 x 5.5/ SL 1.2 x 6.5 / 50mm length: PH1/ PH2/ PZ1/ PZ2/ TX10/ TX15/ TX20 / ¼″ Hex magnetic bit holder | 4932352255 | 4002395369140 |



COLD



PROFI-BOX HSS-R (DIN 338) METAL DRILL BITS

- HSS-Rollforged metal drill bits manufactured according to DIN 338
- 118° cutting tip angle
- Oxide coating for improved swarf removal
- Robust metal box

| | Article Number | EAN Code |
|---|----------------|---------------|
| Counter display (10 x sets) HSS-R | 4932352460 | 4002395371198 |
| Single Profi-Box HSS-R Drill Bits (19pcs) | 4932352459 | 4002395371181 |
| Contents: Ø 1-10mm in 0.5mm incrementals | 4732332437 | 4002395371161 |



• Contains a mixed assortment of drill bits for drilling wood, metal and masonry/stone (18 pieces in total)

Robust metal box

| | Article Number | EAN Code |
|---|----------------|---------------|
| Counter display (10 x sets) Maxi-Mix Drill Bits | 4932352464 | 4002395371235 |
| Single Maxi-Mix Drill Bits (18pcs) | | |
| Contents: Stone drill bits: Ø 3/4/5/6/8/10mm, HSS-R drill bits: Ø 3/4/5/6/8/10mm, Wood drill bits: Ø 3/4/5/6/8/10mm | 4932352463 | 4002395371228 |



WB1 - SCREWDRIVER ANGLE ATTACHMENT WITH 10 SCREWDRIVING BITS

- Contents: WB1 and crewdriving bits 25mm PH1/ PH2/ PZ1/ PZ2 (2pcs)/ PZ3/ TX15/ TX20/ Hex 4/ Hex 5
- Being only 30mm high it is ideally suited to working in confined and limited spaces
- Fits to all machines. The $^{1}/_{4}$ " Hex shank fits directly into the chuck preventing slippage
- Magnetic 1/4" Hex reception. Accepts 1/4" Hex screwdriving bits
- Adjustable to working situation. 360° variable thumb lever for extra grip
- Industrial quality up to 11Nm torque and 400min-1
- Tough gears made of special hardened steel



| | Article Number | EAN Code |
|--|----------------|---------------|
| Counter Display (10 X WB1 Sets) | 4932430174 | 4002395378357 |
| Screwdriver Angle Attachment With 10 Screwdriving Bits | (070) 70477 | (0007057707/0 |
| Contents: Screwdriver angle attachment with 10 screwdriving bits | 4932430173 | 4002395378340 |

MAXI-BIT SCREWDRIVING SET

| | Article Number | EAN Code |
|--|----------------|---------------|
| Counter display (20 x sets) & Screwdriving Bits | 4932399494 | 4002395361144 |
| Single Maxi-Bit Set Screwdriving Bits (10pcs) | | |
| Contents: SL 0.6 x 4.5/ SL 0.8 x 5.5/ SL 1.5 x 6.5/ PH1/ PH2/ PH3/ PZ1/ PZ2/ PZ3 / $^{1}\!/^{*}$ Hex magnetic bit holder | 4932399493 | 4002395361151 |





PROFI-BIT SCREWDRIVING SET

| | Article Number | EAN Code |
|--|----------------|---------------|
| Counter Display (17 x Sets) Screwdriving Bits | 4932399496 | 4002395361168 |
| Single Profi-Bit Set Screwdriving Bits (17pcs) Contents: SL 0.8 x 5.5/ SL 1.2 x 6.5/ PH1/ PH2 (2pcs)/ PH3/ PZ1/ PZ2 (2pcs)/ PZ3/ TX10/ TX15/ TX20/ TX25/ TX30/ TX40 ¹ /4" Hex magnetic bit holder | 4932399495 | 4002395361175 |

FIXTEC NUTS

- FIXTEC: Disc changing in seconds, no extra tools required
- 12 seconds from removing the worn disc to fixing a new disc
- Only 8 mm thick, enabling more surface of disc on the material
- Compatible to all manufactures angle grinders up to 150 mm with standard M14 spindle thread
- · With integrated keyholes, for removal of the nut with a standard pin spanner in the event of the nut becoming too tight





| Article | Number | |
|---------|--------|--|
| ALINCIE | Number | |

EAN Code


| Counter display (12 x FIXTEC Nut) | 4932358936 | 4002395326693 |
|------------------------------------|------------|---------------|
| Single FIXTEC Nut | 4932358225 | 4002395325528 |

SDS-PLUS DRILL BITS - 2 CUT / 10 PIECE POWER PACKS

- High quality 2 cutter carbide tip with 130 degree tip angle
- The carbide tip is set deeper into the head for a more precise fit and better durability
- 2 flute geometry for rapid material removal
- Surface treated eliminates binding for faster drilling and high abrasion resistance
- Made in Germany

E.

| Diameter (mm) | Total length (mm) | Working length (mm) | Quantity | Article Number | EAN Code |
|--|---|---------------------|---------------|----------------|---------------|
| 5 | 110 | 50 | 10 | 4932352256 | 4002395369157 |
| 7 | 160 | 100 | 10 | 4932352260 | 4002395369195 |
| 8 | 110 | 50 | 10 | 4932352261 | 4002395369201 |
| 8 | 160 | 100 | 10 | 4932352262 | 4002395369218 |
| 8 | 210 | 150 | 10 | 4932352263 | 4002395369225 |
| 10 | 160 | 100 | 10 | 4932352264 | 4002395369232 |
| 10 | 210 | 150 | 10 | 4932352265 | 4002395369249 |
| 10 | 260 | 200 | 10 | 4932352266 | 4002395369256 |
| 12 | 210 | 150 | 10 | 4932352268 | 4002395369270 |
| Single Power Set SDS-F with Ø 5/6/8 x 110mm ar | Plus Drill Bits (8pcs) nd Ø 6 (2pcs)/8/10/12 x 16 | 4932352236 | 4002395368952 | | |
| SDS-plus Starter Set with Ø 6/8/10 x 160mm, | point chisel and flat chise | 1 | | 4932352653 | 4002395373116 |






SDS MAX DRILLS - 2 CUT

| Diameter (mm) | Total length (mm) | Working length (mm) | Quantity | Article Number | EAN Code |
|---------------|-------------------|---------------------|----------|----------------|---------------|
| 16 | 540 | 400 | 1 | 4932352687 | 4002395373451 |
| 18 | 540 | 400 | 1 | 4932352688 | 4002395373468 |
| 20 | 520 | 400 | 1 | 4932352689 | 4002395373475 |
| 22 | 520 | 400 | 1 | 4932352690 | 4002395373482 |
| 25 | 520 | 400 | 1 | 4932352691 | 4002395373499 |
| 28 | 570 | 450 | 1 | 4932352692 | 4002395373505 |
| 30 | 570 | 450 | 1 | 4932352693 | 4002395373512 |

SDS-PLUS CHISELS

| Description | Length (mm) | Width (mm) | Quantity | Article Number | EAN Code |
|--|-------------|------------|----------|----------------|---------------|
| SDS-Plus Flat Chisel | 200 | 20 | 1 | 4932352270 | 4002395369294 |
| SDS-Plus Wide Chisels | 200 | 35 | 1 | 4932352271 | 4002395369300 |
| Set Of 3 SDS-Plus Chi with 1 pointed, 1 flat, 1 v | | | | 4932352272 | 4002395369317 |



B

Ą

SDS MAX CHISELS

| Description | Length (mm) | Width (mm) | Quantity | Article Number | EAN Code | Α |
|---------------------|-------------|------------|----------|----------------|---------------|-----|
| Point Chisel | 400 | - | 1 | 4932352685 | 4002395373437 | AFG |
| SDS Max Flat Chisel | 400 | 25 | 1 | 4932352686 | 4002395373444 | ALD |

MULTIMIX SET 75 PCS - DRILLING AND SCREWDRIVING SET

| | Article Number | EAN Code |
|---|----------------|---------------|
| Contents: Scewdriving bits 25mm length: $1 \times PH 0/1 \times PH 1/3 \times PH 2/1 \times PH 3/1 \times PZ 0/1 \times PZ 1/3 \times PZ 2/1 \times PZ 3/1 \times SQ 1/1 \times SQ 2/1 \times SQ 3/1 \times TX 10/1 \times TX 15/1 \times TX 20/1 \times TX 25/1 \times TX 30/1 \times TX 40/1 \times Hex 4/1 \times Hex 5/1 \times Hex 6/1 \times SL 3/1 \times SL 4/1 \times SL 4/1 \times SL 5/1 \times SL 6/1 \times SL7/1 \times SL 8, 1/4" Hex magnetic bit holder. Screwdriving bits 50mm length: 1 \times PH 2/1 \times PZ 2/1 \times SL 4/1 \times SL 5/1 \times SL 6/1 \times SL8, 1/4" Hex magnetic bit holder. Screwdriving bits 50mm length: 1 \times PH 2/1 \times PZ 2/1 \times SL 4/1 \times SL 6/1 \times SL8, 1/4" Hex magnetic bit holder. 1 \times 7mm/1 \times 8mm/1 \times 10mm/1 \times 12mm Metal drill bits HSS-R DIN 338: 2 \times 1mm/1 \times 1.5 Contents. Scewdriving bits 25 mm length: 1 \times PH 0/1 \times PH 2/1 \times PZ 2/1 \times PH 3/1 \times PZ 0/1 \times PZ 1/3 \times PZ 2/1 \times SQ 3/1 \times SQ 3/1$ | 4932352670 | 4002395373284 |

METAL DRILL BITS HSS-G COBALT (DIN 338)

- Metal drill bits ground from solid extremely heat resistant cobalt-alloyed high speed steel produced according to DIN 338. Polished finish. Split point shaped cutting tip with 135° angle for improved centering no center punched required.
- 5% Cobalt content. Withstands high drilling heat.
- Type N flute normal angle.
- Suitable for drilling high alloy content steels and metals with tensile strengths of over 1000 N/mm like heat and acid proof steels and stainless steel.
- Colour: bronze.

| Diameter (mm) | Total length (mm) | Working length (mm) | Quantity | Article Number | EAN Code |
|---------------|-------------------|---------------------|----------|----------------|---------------|
| 2,0 | 49 | 24 | 2 | 4932430416 | 4002395380770 |
| 3,0 | 61 | 33 | 2 | 4932430417 | 4002395380787 |
| 3,2 | 65 | 36 | 2 | 4932430418 | 4002395380794 |
| 4,0 | 75 | 43 | 2 | 4932430419 | 4002395380800 |
| 4,8 | 86 | 52 | 1 | 4932430420 | 4002395380817 |
| 5,0 | 86 | 52 | 1 | 4932430421 | 4002395380824 |
| 6,0 | 93 | 57 | 1 | 4932430422 | 4002395380831 |
| 7,0 | 109 | 69 | 1 | 4932430423 | 4002395380848 |
| 8,0 | 117 | 75 | 1 | 4932430424 | 4002395380855 |
| 9,0 | 125 | 81 | 1 | 4932430425 | 4002395380862 |
| 10,0 | 133 | 87 | 1 | 4932430426 | 4002395380879 |
| 11,0 | 142 | 94 | 1 | 4932430427 | 4002395380886 |
| 12,0 | 151 | 101 | 1 | 4932430428 | 4002395380893 |
| 13,0 | 151 | 101 | 1 | 4932430429 | 4002395380909 |



• Carbide tip with diamond ground cutting edges with 130° angle - For drilling in brick and aerated concrete blocks

| Diameter (mm) | Total length (mm) | Working length (mm) | Quantity | Article Number | EAN Code |
|--|-------------------|---------------------|----------|----------------|---------------|
| 4 | 75 | 40 | 1 | 4932363591 | 4002395332410 |
| 5 | 85 | 50 | 1 | 4932363593 | 4002395332434 |
| 5.5 | 85 | 50 | 1 | 4932363595 | 4002395332458 |
| 6 | 100 | 60 | 1 | 4932363597 | 4002395332472 |
| 7 | 100 | 60 | 1 | 4932363599 | 4002395332496 |
| 8 | 120 | 80 | 1 | 4932363600 | 4002395332502 |
| 10 | 120 | 80 | 1 | 4932363602 | 4002395332526 |
| 12 | 150 | 85 | 1 | 4932363604 | 4002395332540 |
| Single Power Set Stone D Contents: Ø 4/5/5.5/6 (2pc | • | | | 4932352239 | 4002395368983 |



HIGH PERFORMANCE BI-METAL HOLESAWS / SYSTEM ACCESSORIES

| Diameter (mm) | Ø (inch) | Article Number | EAN Code | Diameter (mm) | Ø (inch) | Article Number | EAN Code |
|---------------|--------------------------------|----------------|---------------|---------------|-------------------------------|----------------|---------------|
| 14 | 9/16 | 4932367244 | 4002395335947 | 57 | 2 1/4 | 4932367266 | 4002395336173 |
| 16 | 5/8 | 4932367245 | 4002395335954 | 60 | 2 3/8 | 4932367267 | 4002395336180 |
| 19 | 3/4 | 4932367247 | 4002395335978 | 64 | 2 1/2 | 4932367268 | 4002395336197 |
| 20 | ²⁵ / ₃₂ | 4932367248 | 4002395335985 | 65 | 2 %/16 | 4932367269 | 4002395336203 |
| 21 | 13/16 | 4932367249 | 4002395335992 | 68 | 2 11/16 | 4932371580 | 4002395345250 |
| 22 | 7/8 | 4932367250 | 4002395336005 | 70 | 2 ³ /4 | 4932367271 | 4002395336227 |
| 24 | 15/16 | 4932367251 | 4002395336012 | 73 | 2 7/8 | 4932367272 | 4002395336234 |
| 25 | 1 | 4932367252 | 4002395336029 | 76 | 3 | 4932367273 | 4002395336241 |
| 27 | 1 ¹ / ₁₆ | 4932367253 | 4002395336036 | 79 | 3 ¹ /8 | 4932367274 | 4002395336258 |
| 29 | 1 ¹ /8 | 4932367289 | 4002395336043 | 83 | 3 ¹ /4 | 4932367275 | 4002395336265 |
| 30 | 1 ³ /16 | 4932367254 | 4002395336050 | 89 | 3 ¹ / ₂ | 4932367277 | 4002395336289 |
| 32 | 1 ¹ /4 | 4932367255 | 4002395336067 | 92 | 3 ⁵ /8 | 4932367278 | 4002395336296 |
| 35 | 1 ³ /8 | 4932367256 | 4002395336074 | 98 | 3 7/8 | 4932367280 | 4002395336319 |
| 38 | 1 ¹ / ₂ | 4932367257 | 4002395336081 | 102 | 4 | 4932367281 | 4002395336326 |
| 40 | 1 ⁹ /16 | 4932367258 | 4002395336098 | 105 | 4 ¹ /8 | 4932367282 | 4002395336333 |
| 43 | 1 11/16 | 4932367259 | 4002395336104 | 114 | 4 ¹ / ₂ | 4932367284 | 4002395336357 |
| 44 | 1 ³ /4 | 4932367260 | 4002395336111 | 121 | 4 ³ / ₄ | 4932367285 | 4002395336364 |
| 48 | 1 ⁷ /8 | 4932367262 | 4002395336135 | 127 | 5 | 4932367286 | 4002395336371 |
| 51 | 2 | 4932367263 | 4002395336142 | 152 | 6 | 4932367288 | 4002395336395 |
| 54 | 2 ¹ /8 | 4932367265 | 4002395336166 | | | | |

Article Number EAN Code

| Arbor Hex 11 -5/8" x 18 - 1pc | FIXTEC arbor 5/8″ x 18, 11mm Hex for holesaws Ø 32 - 152mm | 4932367421 | 4002395337422 | |
|-------------------------------|--|------------|---------------|--|
| Arbor Hex 9 -1/2"x20 - 1pc | Arbor 1/2″ x 20, Light duty arbor 1/2″ x 20, Hex 9 for holesaws Ø 14 - 30mm | 4932367422 | 4002395337439 | |
| Pilot Drill - Long - 1pc | Pilot drill bit long. For use with arbor 4932367421 | 4932367423 | 4002395337446 | |
| Pilot Drill - Short - 1pc | Pilot drill bit short. For use with arbor 4932367422 | 4932367424 | 4002395337453 | |

JIGSAW BLADES FOR WOOD / PLASTICS / METAL

| Blade length (mm) | pitch | Ref. No. | Quantity | Description | Max. cutting capacity wood (mm) | Max. cutting capacity laminated chipboard (mm) | capcity parquet | Max. cutting capacity PVC (mm) | Max. cutting capacity non- ferrous metals (mm) | Max. cutting capacity metal pipe Ø (mm) | Max. cutting capacity aluminium (mm) | Article Number | EAN Code |
|-------------------------|-------|----------|--------------|---|---|--|--------------------|---|--|--|--|-------------------|---------------|
| | | | | | | | | | | | | | |
| 75 | 3 | T 111 C | 5 | For Rough Cutting | 5-60 | | | < 40 | | | | 4932352144 | 4002395367979 |
| | | | | | | | | | | | | | |
| 75 | 4 | T 244 D | 5 | For Rough, Curve Cutting | < 60 | | | | | | | 4932352146 | 4002395367993 |
| | | | | | | | | | | | | | |
| 75 | 4 | T 144 D | 5 | For Fast, Rough Cutting | < 60 | | | | | | | 4932352147 | 4002395368006 |
| 3521 4 | 18 | A | EG | | | | | | | | | | |
| 75 | 2.5 | T 101 B | 5 | For Very Clean, Splinter Free Cutting | < 30 | < 60 | | < 30 | | | | 4932352148 | 4002395368013 |
| 3521 4 | 19 | A | EG | | | | | | | | | | |
| 75 | 4 | T 101 D | 5 | For Fast, Clean, Splinter Free Cutting | < 60 | < 60 | | < 45 | | | | 4932352149 | 4002395368020 |
| 3521 5 | 0 | AEG | | | | | | | | | | | |
| 55 | 1.2 | T 118 A | 5 | For Thin Sheet Metal | | | | | 1.5-4 | 1.5-4 | | 4932352150 | 4002395368037 |
| 35 | 1.2 | AEG | 5 | Tor Himblicer Melar | | | | | 1.5 4 | 1.5 4 | | 4752552150 | 4002373300037 |
| 3021 0 | | | - | | | | | | | | 7.40 | | |
| 55 | 2 | T 118B | 5 | Rougher Cuts In Metal | | | | | 3-6 | 3-6 | 3-10 | 4932352151 | 4002395368044 |
| Section 1 | | | 12 piece set | in container | | | | | | | | | |
| | | | Suitable for | applications in wood, cutting workto | ps and lam | inate flooring a | nd metals | | | | | 4932373494 | 4002395349944 |
| | | | Power Set 5 | iOpcs - jigsaw blades for wood and m | ietal | | | | | | | | |
| | | | | | | | | | | | | (070750057 | (0007057/010/ |
| | | | 10 X 1 144 L | D/ 10 x T 101 B/ 15 x T 118 A/ 15 x T 1 | 20 B | | | | | | | 4932352253 | 4002395369126 |

CIRCULAR SAW BLADES FOR PORTABLE TOOLS

| Total length (mm) | Working length (mm) | No. of teeth | Cutting width (kerf) (mm) | Fibre cement board | Chip- board | MDF and fibre- board | Laminat- ed chip- board | Plyywood & OSB boards | Plastics | Plaster- board | Non ferrous metals profiles alu | Fine cut | Article Number | EAN Code |
|-------------------------|---------------------------|-----------------|------------------------------------|--------------------------|----------------|----------------------------|-------------------------------|--------------------------|----------|-------------------|---|----------|----------------|---------------|
| 127 | 20 | 40 | 1.8 | | ~ | ~ | ~ | v | v | | | ~ | 4932352535 | 4002395371938 |
| 160 | 20 | 48 | 2.2 | | ~ | v | v | v | v | | | ~ | 4932352868 | 4002395375264 |
| 160 | 20 | 48 | 2.2 | | | | | | v | | ~ | ~ | 4932352869 | 4002395375271 |
| 165 | 20 | 24 | 2.6 | | v | v | v | v | v | | | | 4932430311 | 4002395379729 |
| 165 | 20 | 52 | 2.8 | | v | v | v | v | v | | | ~ | 4932430312 | 4002395379736 |
| 190 | 30 | 24 | 2.2 | | ~ | ~ | ~ | v | ~ | | | | 4932430469 | 4002395381302 |
| 190 | 30 | 48 | 2.8 | | v | ~ | ~ | ~ | ~ | | | ~ | 4932430470 | 4002395381319 |

CIRCULAR SAW BLADES FOR CORDLESS TOOLS

| Total length (mm) | Working length (mm) | No. of teeth | Cutting width (kerf) (mm) | Fibre cement board | Chip- board | MDF and fibre- board | Laminat- ed chip- board | Plyywood & OSB boards | Plastics | Plaster- board | Non ferrous metals profiles alu | Fine cut | Article Number | EAN Code |
|-------------------------|---------------------------|-----------------|------------------------------------|--------------------------|----------------|----------------------------|-------------------------------|--------------------------|----------|-------------------|---|----------|----------------|---------------|
| 165 | 15.8 | 18 | 1.5 | | ~ | ~ | ~ | v | ~ | | | ~ | 4932430366 | 4002395380275 |

MITRE SAW BLADES

| Total length (mm) | Working length (mm) | No. of teeth | Cutting width (kerf) (mm) | Fibre cement board | Chip- board | MDF and fibre- board | Laminat- ed chip- board | Plyywood & OSB boards | Plastics | Plaster- board | Non ferrous metals profiles alu | Fine cut | Article Number | EAN Code |
|-------------------------|---------------------------|-----------------|------------------------------------|--------------------------|----------------|----------------------------|-------------------------------|--------------------------|----------|-------------------|---|----------|----------------|---------------|
| 216 | 30 | 48 | 2.4 | | ~ | ~ | ~ | v | ~ | | | | 4932430721 | 4002395383825 |
| 254 | 30 | 48 | 3.2 | | ~ | ~ | ~ | v | ~ | | | | 4932430471 | 4002395381326 |
| 254 | 30 | 80 | 3.2 | | | | | | | | ~ | v | 4932430472 | 4002395381333 |
| 305 | 30 | 96 | 3.2 | | | | | | | | ~ | ~ | 4932430474 | 4002395381357 |

DUST EXTRACTION

- Xtractor
- The ideal dust extraction solution.
- The Xtractor can be used with all household vacuum cleaners and industrial dust extraction units with a hose diameter from 26-41mm.

| Description | Article Number | EAN Code | |
|--|----------------|---------------|---|
| Xtractor - 1bc The ideal dust extraction solution. The Xtractor can be used with all household and industrial dust extraction units with a hose diameter from 26-41mm. | 4932373501 | 4002395351862 | X |

100 ACCESSORIES

RECIPROCATING SAW BLADES FOR WOOD / PLASTICS / METAL

| Blade length (mm) | Tooth pitch (mm) | Ref. No. | Quantity | Description | Article Number | EAN Code |
|-------------------------|---------------------|----------|---|---|----------------|---------------|
| O AEG | | | ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~ | | | |
| 150 | 2.5 | S811H | 3 | For all woods, nail embedded wood, plaster board 3-100mm, non-ferrous metals, aluminium 3-10mm, plastic pipes | 4932318127 | 4002395301959 |
| O AEG | | unnu | | | | |
| 150 | 4.2 | S744D | 2 | For fast scroll cutting 6-100mm | 4932323801 | 4002395304240 |
| | | nnnn | mm | | | |
| 150 | 4 | S644D | 2 | For fast cutting of wood and plastic, plunge cutting, 6-100mm | 4932323800 | 4002395304233 |
| Jo | | | | mm | | |
| 240 | 8.5 | S1542K | 2 | Special hardened teeth design, for fast coarse cut, as well for green and fire wood, 20-180mm | 4932323804 | 4002395304271 |
| At6 | | | | | | |
| 300 | 4.2 | S1344D | 2 | For cutting large timbers and plastic, clean cut, 6-250mm | 4932323802 | 4002395304257 |
| O AEG | 3 | | $\overline{}$ | | | |
| 150 | 1.4 | S922EF | 3 | For all metals with a wall thickness between 1.5-4mm | 4932354792 | 4002395324477 |
| O AEG | | | | | | |
| 150 | 1.8 | S922BF | 3 | For all metals with a wall thickness between 3-10mm | 4932354789 | 4002395324446 |
| • A | EG | | | | | |
| 230 | Coarse grit | S1130R | 2 | For abrasive materials, fibreglass materials (polyesters, expoxies, melamines), cast iron pipes | 4932373386 | 4002395348817 |
| | | | | | | |
| - | | | | | | |
| 450 | 17 | - | 1 | For abrasive materials ie. bricks, soft abrasive blocks | 4932430447 | 4002395381081 |
| 0 46 | | ~~~~ | | | | |
| 300 | 4.2 | - | 1 | For cutting of frozen materials | 4932430448 | 4002395381098 |
| 400 | 4.2 | - | 1 | For cutting of frozen materials | 4932430449 | 4002395381104 |

5PCS ABRASIVE CUT-OFF WHEEL

- 5pcs set of 76mm Abrasive Cut-off Wheels
- For Cut-off tools with capacity of 76mm width and 10mm bore size incuding AEG BMM18SBL-0
- For cutting applications including: Cutting thread rods, Unistrut, cable tray, ventilation ducting, copper and
 many more

| Diameter (mm) | Bore size (mm) | Quantity | Article Number | EAN Code |
|---------------|----------------|----------|----------------|---------------|
| 76 | 10 | 5 | 4932478588 | 4892210192035 |

1PC DIAMOND ABRASIVE WHEEL

- 1pc 76mm Diamond Abrasive Wheel
- For Cut-off tools with capacity of 76mm width and 10mm bore size incuding AEG BMM18SBL-0
- For cutting applications including: Cutting of wall tiles for bathroom and kitchen and Cutting out of floor tile for new or existing pipe work

| Diameter (mm) | Bore size (mm) | Quantity | Article Number | EAN Code |
|---------------|----------------|----------|----------------|---------------|
| 76 | 10 | 1 | 4932478589 | 4892210192059 |

1PC CARBIDE ABRASIVE WHEEL

- 1pc 76mm Carbide Abrasive Wheel
- For Cut-off tools with capacity of 76mm width and 10mm bore size incuding AEG BMM18SBL-0
- For cutting applications including: Cutting of drywall and plasterboard, nails and wood.

| Diameter (mm) | Bore size (mm) | Quantity | Article Number | EAN Code |
|---------------|----------------|----------|----------------|---------------|
| 76 | 10 | 1 | 4932478590 | 4892210192042 |

NEW









BLADES FOR OSCILLATING TOOL


Universal blade reception make AEG blades compatible with most popular oscillating tools

| Universal blade reception make AEG blades com Every blade pack contains both washers | patible with most | popular oscillatin | g tools | L | OMNIPRO | ISAL (276) |
|--|-----------------------|----------------------------|----------|----------------|---------------|--|
| Description | Cutting width (mm) | Max. cutting depth (mm) | Quantity | Article Number | EAN Code | UNIVERSAL |
| Bi-Metal plunge cutting blade. Application: Wood, metal, PVC. Plunge cutting in wood/ steel/ copper/ aluminium | 28 | 40 | 1 | 4932430315 | 4002395379767 | |
| Plunge cutting blade. Application: Wood, PVC. Plunge cutting in soft and hard wood, PVC. Recess cutting in wood. Flush cutting to length in wood | 28 | 40 | 1 | 4932430316 | 4002395379774 | |
| Plunge cutting blade. Application: Wood, PVC. Plunge cutting in soft and hard wood, PVC. Blade sits flush when cutting in door jambs. Recess cutting in wood | 9 | 40 | 1 | 4932430317 | 4002395379781 | |
| Bi-Metal flush cutting blade. Application: Wood, metal, PVC. Plunge cutting in solid wood. Flush cutting in wood. Cutting steel. copper/ aluminium/ metal pipes and profiles with small dimensions. Cutting PVC pipes to length | 88 | 20 | 1 | 4932430319 | 4002395379804 | |
| Grout removal blade. Application: Grout, mortar, ③ soft tiles. Routing grout joints on wall and floor tiles | 85 | 20 | 1 | 4932430318 | 4002395379798 | Б Б С Б С С С С С С С С С С С С С С С С |
| 9pc Set: 2 x bi-metal plunge cutting blades, 2 x plunge cutting blades 28mm, 2 x plunge cutting blades 9mm, 1 x bi-metal flush cutting blade, 1 x scraper, 1 x grout blade | | | 9 | 4932430314 | 4002395379750 | 6 |
| 𝔊 Washer Set: To fit Bosch keyless oscillating tool, To fit Dremel keyless oscillating tool | | | 2 | 4931441298 | 4002395872541 | ALG CON |

 $^{\circ}$ OU

SANDING ACCESSORIES FOR OSCILLATING TOOL

| Description | Grit | Dimensions (mm) | Quantity | Article Number | EAN Code | | |
|---|---------|--------------------|----------|----------------|---------------|---|-------|
| (8) Sanding Pad | | 93 x 93 | 1 | 4932430320 | 4002395379811 | 8 | 0 |
| 10pc Set Sanding Paper Hook & Loop: 4 X Grit 60, 3 X Grit 80, 3 X Grit 120. Application: Wood, PVC. (9) For Sanding Small Areas, E.G. In Corners, Along Edges, In Restricted. Areas And Tight Spaces, Sanding Down Of Surface Blemishes. | 6080120 | 93 x 93 | 10 | 4932430321 | 4002395379828 | 9 | • • • |



ABRASIVE PAPER- HOOK & LOOP FOR FDS 140

- Perforated sanding discs for wood, metal, paint, lacquer, plaster
- Grit type: fused alumina, half-open
- Artifical resin-bonded on special tear-resistant paper

| Grit | Dimensions (mm) | Quantity | Article Number | EAN Code | Ī |
|------|-----------------|----------|----------------|---------------|---|
| 60 | 115 x 107 | 10 | 4932352420 | 4002395370795 | |
| 80 | 115 × 107 | 10 | 4932352421 | 4002395370801 | A |
| 120 | 115 × 107 | 10 | 4932352422 | 4002395370818 | |
| 240 | 115 x 107 | 10 | 4932352423 | 4002395370825 | |



R

ABRASIVE PAPER- CLAMP TYPE FOR FDS 140

- Perforated sanding discs for wood, metal, paint, lacquer, plaster
- Grit type: fused alumina, half-open
- Artificial resin-bonded on special tear-resistant paper

| Grit | Dimensions (mm) | Quantity | Article Number | EAN Code | • • |
|------|-----------------|----------|----------------|---------------|-----|
| 60 | 115 x 140 | 10 | 4932352424 | 4002395370832 | |
| 80 | 115 x 140 | 10 | 4932352425 | 4002395370849 | A |
| 120 | 115 x 140 | 10 | 4932352426 | 4002395370856 | |
| 240 | 115 x 140 | 10 | 4932352427 | 4002395370863 | |


ABRASIVE DELTA PAPER- HOOK & LOOP FOR FDS 140

• Perforated sanding discs for wood, metal, paint, lacquer, plaster

• Grit type: fused alumina, half-open

• Artificial resin-bonded on special tear-resistant paper

| Grit | Dimensions (mm) | Quantity | Article Number | EAN Code |
|------|-----------------|----------|----------------|---------------|
| 60 | 110 x 88 | 10 | 4932352925 | 4002395375837 |
| 120 | 110 x 88 | 10 | 4932352927 | 4002395375851 |
| 240 | 110 x 88 | 10 | 4932352928 | 4002395375868 |



ABRASIVE DISCS- HOOK & LOOP- 6 HOLES

• Perforated sanding discs for wood, metal, paint, lacquer, plaster

• Grit type: fused alumina, half-open

• Artificial resin-bonded on special tear-resistant paper

| Grit | Diameter (mm) | Quantity | Article Number | EAN Code |
|------|---------------|----------|----------------|---------------|
| 40 | 150 | 5 | 4932430454 | 4002395381159 |
| 60 | 150 | 5 | 4932430455 | 4002395381166 |
| 80 | 150 | 5 | 4932430456 | 4002395381173 |
| 120 | 150 | 5 | 4932430457 | 4002395381180 |
| 180 | 150 | 5 | 4932430458 | 4002395381197 |
| 240 | 150 | 5 | 4932430459 | 4002395381203 |



POLISHING ACCESSORIES- HOOK & LOOP

| Description | Diameter (mm) | Height (mm) | Quantity | Article Number | EAN Code | - |
|---|---------------|-------------|----------|----------------|---------------|---|
| Polishing Backing Pad. Application: Reception Of Felt- / Lambswool Polishing Discs And Polishing Sponges. Characteristics: M14 Thread, Break Resistant With Integrated Soft And Flexible Foam Layer, Hook & Loop Fixation | - 150 | 25 | 1 | 4932430450 | 4002395381111 | |
| Lambswool Polishing Disc. Application: Finishing High Gloss Polishing. Requires Polishing Backing Pad Characteristics: Natural Lambs Wool, Very Soft And Adaptable. Hook & Loop Fixation | 150 | | 1 | 4932430453 | 4002395381142 | |
| Polishing Sponge - Hard. Application: Polish Up Of Weather-Beaten Lacquer, Lacquer Reconditioning. Requires Polishing Backing Pad. Characteristics: Medium Hard, Fine Pored, With Rounded Edge, Hook & Loop Fixation | 150 | 50 | 1 | 4932430452 | 4002395381135 | |
| Polishing Sponge- Soft. Application: Second Polish Of Lacquer, Lacquer Care. Requires Polishing Backing Pad. Characteristics: Super-Soft, Fine Pored, With Rounded Edge, Hook & Loop Fixation | 150 | 50 | 1 | 4932430451 | 4002395381128 | |

BASE PLATES

| Description | Diameter (mm) | No. of holes | Article Number | EAN Code |
|---|---------------|--------------|-------------------------|---------------|
| Base Plate For EX 125 ES. Complete With Rubber Ring As Spare | 125 | 8 | 4 9 32352870 | 4002395375288 |
| Base Plate For EX 150 E. Complete With Rubber Ring As Spare | 150 | 6 | 4932352871 | 4002395375295 |





26" TOOLBOX

- 26" Toolbox, 37 litres capacity
- Heavy duty PP construction
- Water resistant seal built into the lid
- Metal latches and portable tray



| Description | Quantity | Article Number | EAN Code |
|-------------------|----------|----------------|---------------|
| 37 liters toolbox | 1 | 4932471878 | 4058546323769 |

21" TOOLBOX

- 21.5 litres capacity / 21"
- Heavy duty PP construction
- Water resistant seal built into the lid
- Metal latches and portable tray



| Description | Quantity | Article Number | EAN Code |
|-------------|----------|----------------|---------------|
| 21L Toolbox | 1 | 4932471879 | 4058546323776 |

TOTE BAG

- High quality 1680 denier
- 8x inner pockets with 6x inner tool loops and 7x outer pockets
- Hard plastic and waterproof base
- Straight zip for open mouth style
- Adjustable shoulder strap



| Description | Quantity | Article Number | EAN Code |
|------------------------|----------|----------------|---------------|
| Tote Bag Eight Pockets | 1 | 4932471880 | 4892210183286 |



| |
|------|
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |

| · · · · · · · · · · · · · · · · · · · | |
|---------------------------------------|--|
| | |
| | |
| | |
| | |
| | |



PRO TOOLS. ONE BATTERY.



AEG POWERTOOLS promises to draw upon its heritage and deliver exciting, high performance, innovative working solutions for the professional tradesmen of today and the future. AEG POWER TOOLS P.O. Box 320 D-71361 Winnenden Germany Tel.: +49 71 95 12-0 Fax: +49 71 95 12-666

AEG-POWERTOOLS.EU



© AEG POWERTOOLS

AEG is a registered trademark used under license from AB Electrolux (publ).