2018/19

# AEG



POWERING PROFESSIONALS SINCE 1898.



#### **FIXTEC System**

For changing accessories in seconds



#### Keyless Safety Guard

safety guard adjustment witho the use of a tool.



#### Impact Driver

For heavy duty screwdriving application



#### Anti-Vibration-System

Significantly reduces vibration b up to 50%.



#### Soft Hammer Mode

Reduces blow energy f increased control.



#### Hex <sup>1</sup>/

1/4" quick release he





#### 2-Speed Geai

2-speed gearbox, for optimu speed to suit application.



#### **Pendulum Action**

For a faster, more aggressive cut.



#### **Drill Onl**

Single mode - rotary drilling



#### Kitbox

Heavy duty kitbox.



#### Electronic

**Dust Extraction** 

With variable speed preselection, soft start, constant speed and overload protection



#### **Drill and Hammer Drill**

2 mode - rotary and rota hammer drilling.



#### Kitbag

Heavy duty kitbag



#### L.E.D.

or workplace illumination



#### **Chisel and Hammer Drill**

2 mode - rotary hammer drill wi shipping/demolition function.



## Crosscut Capacity

Maximum crosscu capacity of saw.



#### Metal Chu

For enhanced durability



#### Combi Hamme

3 mode - rotary and rotary drilling with chiseling/demolition function.



#### Mitre Capacity

Maximum mitre angl right and left.



#### Rotatable Handle

Provides optimum comfort during grinding and cutting.



#### **Chisel Drill**

Chiselling/demolition machine



#### Mitre Saw Blade Laser

Projects the cut line onto material.



# Diamond System

Designed for maximum performance when used with diamond accessories.



# Hook and Loop

Easy sandpaper attachmen without clamps.



#### **Bevel Capacity**

Maximum bevel angle right and left.



**Gears Integrated into Chuck** 



**Cutting Capacity** 



**Bevel Cut Capacity** 




**Belt Clip on the Tool** 



**Cutting Width** 



**Bevel Cut Angle** 





Stroke Length




**Sanding Belt Length** 

# CONTENTS

**AEG POWERTOOLS** promises to draw upon its heritage and deliver exciting, high performance, innovative working solutions for the professional tradesmen of today and the future.

CORDLESS SYSTEMS	6 - 61	METALWORKING	80 - 91
18 V Power	18 – 49	Small Angle Grinders	82 – 84
14.4V Power	50 – 51	Large Angle Grinders	86 – 88
12 V Power	52 – 56	Die Grinders	89 – 90
3.6 V Power	57 – 57	Polisher	90 – 90
Test and Measurement	56 – 56	Right Angle Sander	91 – 91
Omnipro	58 – 61	Metal Chopsaw	91 – 91
HAMMER SYSTEMS	62 - 71	WOODWORKING	93 – 109
Rotary Hammer	64 - 65	Circular Saws	94 – 94
Combi Hammers	65 – 68	Jigsaws	95 – 98
Chipping Hammers	68 – 69	Router	99 – 99
Large Demolition Hammers	69 – 71	Planer	99 – 99
		Reciprocating Saws	100 – 100
DRILLING SYSTEMS	71 – 79	Sanders	101 – 103
Rotary Drill	74 – 74	Heat Guns	104 - 104
Percussion Drills	75 – 77	Table Saw	105 – 105
Wall Chaser	78 – 78	Mitre Saws	106 – 107
Diamond Drill	78 – 78	Mitre Saw Legstand	107 – 107
Screwdrivers	79 – 79	Dust Extraction	108 – 109
		ACCESSORIES	110 - 125

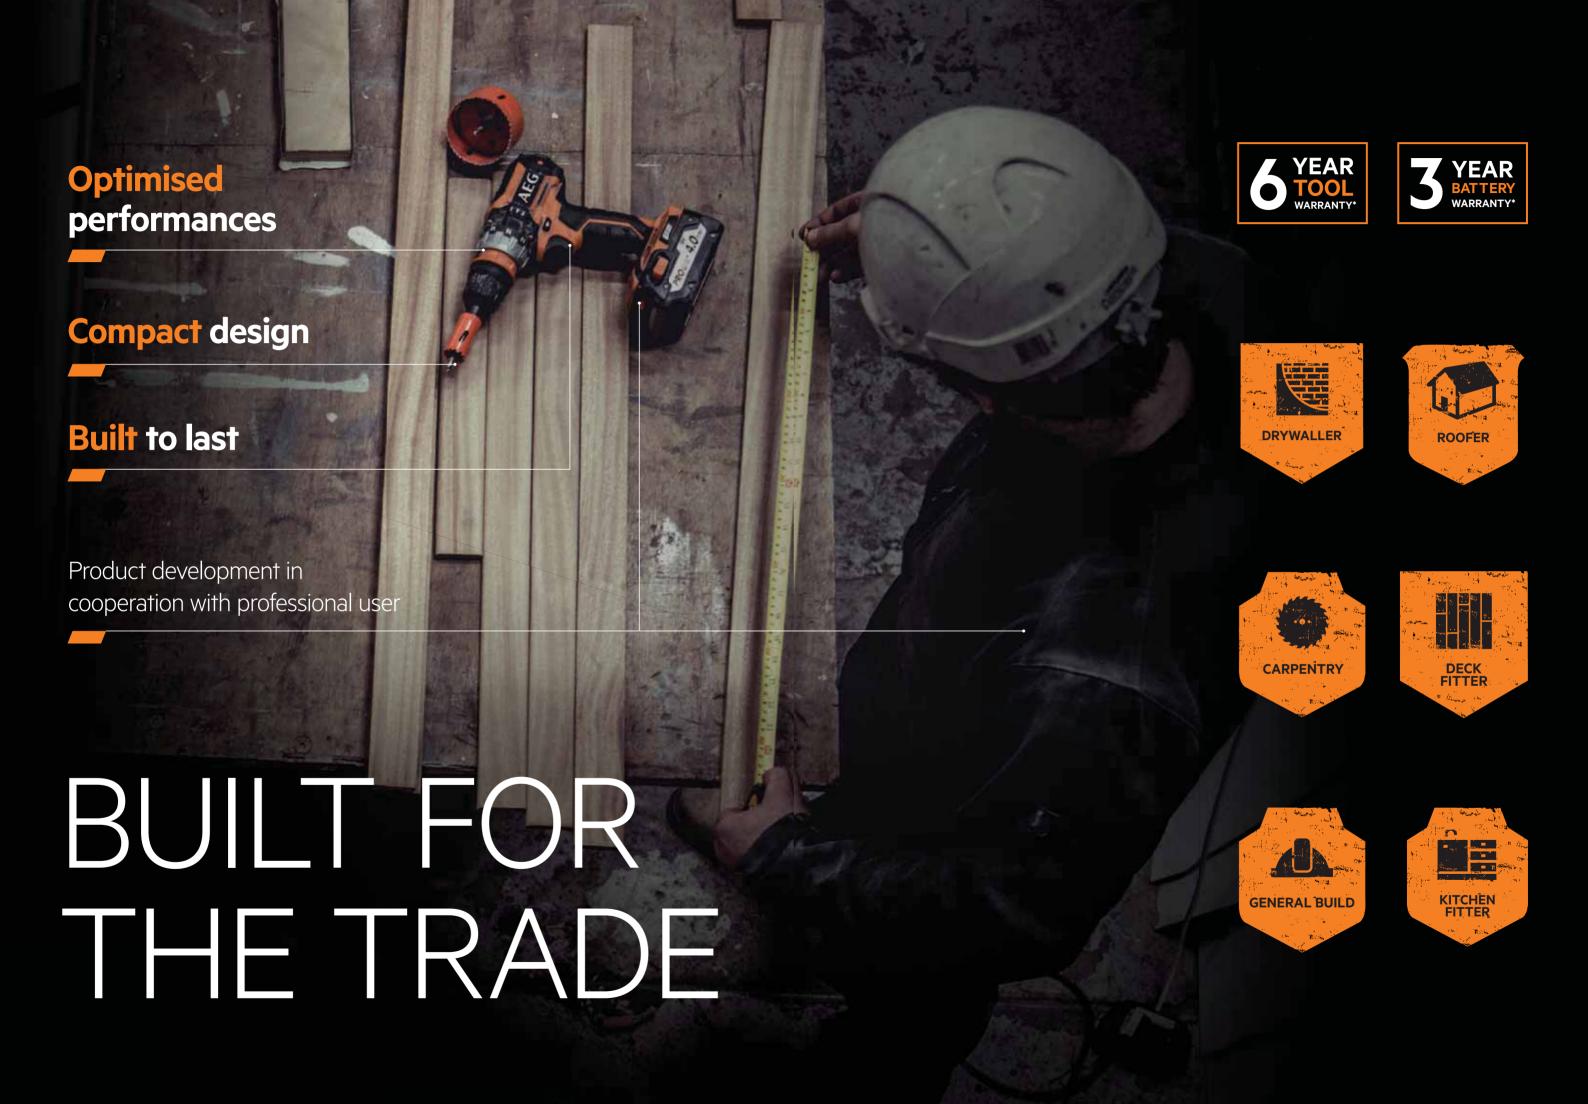

# CORDLESS RANGE

INNOVATIVE CORDLESS SOLUTIONS FOR TOUGH CONDITIONS

**AEG POWERTOOLS** offer today's professional user a wide range of innovative, powerful cordless solutions that are capable of performing in the toughest conditions.

**AEG** 




# AEG







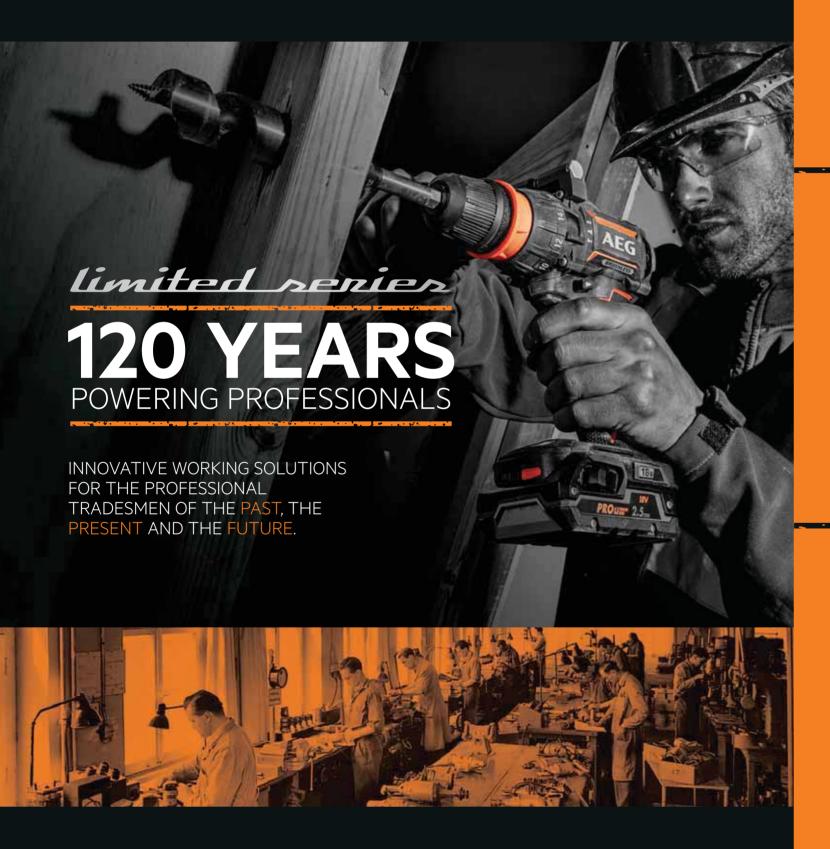

nt Intlint in



# **NEW**

#### **BSB18CBLLE LI-252X**

#### WHAT'S INCLUDED



# **NEW**

#### **BSB18CBLLE LI-252C**

#### WHAT'S INCLUDED



# **NEW**

BS12C2LE LI-202X

#### **WHAT'S INCLUDED**

# PRO 18v

GEAR UP.
GET MORE.




































































# RELENTLESS POWER IN ANY SITUATION.



# **3 CORE TECHNOLOGIES**

At the heart of PRO18V BRUSHLESS tools lies 3 core technologies. These core electronics are built to offer tradesmen relentless power, instinctive technology and unstoppable runtime and sets AEG's PRO18V Brushless tools apart from all competition.

**AVAILABLE BRUSHLESS TOOLS** 

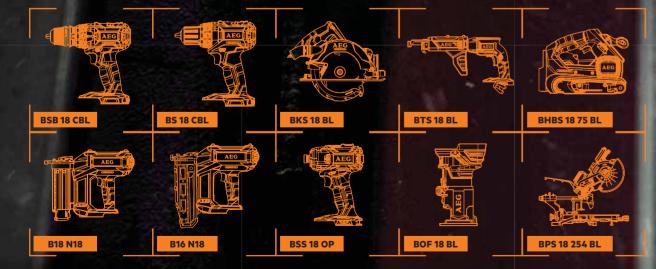





**18V 9.0AH HIGH-DEMAND PACK** 







**NEW** 

Power

Li-ion

# 2 x RUNTIME\*





**164 CUTS** 



80 CUTS

\*2X THE RUNTIME OF A 2P PACK \*\*IN 5 X 10CM PIN





# PRO 18v BRUSHLESS

# **BRUSHLESS HAMMERDRILL DRIVER**

# BSB18C2BL

Power (V)	
Chuck Capacity (mm)	
Max drilling wood / Steel (mm)	40/13
Max Percussion rate (bpm)	25.350
Max Torque (Nm)	
No load speed (rpm)	1950
No load speed gear 1 (rpm)	0-500
No load speed gear 2 (rpm)	0 – 1950
Weight with battery pack (kg)	1.8



# PRO 18v BRUSHLESS

### **BRUSHLESS DRILL DRIVER**

# NEW BS18C2BL

Power (V)	
Chuck Capacity (mm)	
Max drilling wood / Steel (mm)	40/13
Max Percussion rate (bpm)	25.350
Max Torque (Nm)	
No load speed (rpm)	1950
No load speed gear 1 (rpm)	0-500
No load speed gear 2 (rpm)	0 – 1950
Weight with battery pack (kg)	

# 18V BRUSHLESS HAMMERDRILL/DRIVER



BSB 18 CBL

#### **Features**

- New AEG Brushless Hammerdrill driver
- Compact and powerful for every jobsite application
- Only 151mm without the chuck and with chuck 193mm in length makes the shortest Brushless in the market
- 60 Nm with a (2.0Ah) / 75 Nm with a (4.0Ah) battery for maximum torque which delivers complete power
- 2 speed 0-550 / 0-2100 rpm
- Removable 13mm ratchet chuck for the heaviest applications
- 1/4" HEX reception under the chuck, 25mm screwdriving bit can be hold in the reception while the chuck is mounted
- Offset and right angle delivering the same performance as the tool it self, no more need to cope with torque level or drilling speed and you can place them in 12 different positions. Offset and right angle attachement are sold as accessories
- New microtexture overmould for the best handling on the market
- I FD light on the foot print to illuminate the work surface.
- 3 mode selector ease of use between applications

## **Specifications**

	BSB 18CBL LI-402C	BSB 18CBL LI-202C	BSB 18CBL-0
Battery type	Li-ion	Li-ion	-
Battery pack capacity (Ah)	4.0	2.0	18
No. of batteries supplied	2	2	0
Charger supplied	80 min	40 min	-
Max. drilling wood/ steel/ masonry (mm)	45/13/14	45/13/14	45/13/14
Chuck capacity (mm)	1.5-13	1.5-13	1.5-13
Max. torque (Nm)	75	60	-
No load speed (rpm)	0 - 550 / 0 - 2100	0 - 550/0 - 2100	0-550 / 0-2100
Max. percussion rate (bpm)	7.150 / 27.300	7.150 / 27.300	7.150 / 27.300
Weight with battery pack (kg)	2.1	1.8	-
Supplied in	Kitbox	Kitbox	-
Article Number	4935448463	4935448462	4935451082
EAN Code	4002395259373	4002395259366	4002395811083





 $\blacksquare$ 

















# PRO 18v

1-2

BSB 18C2 BL

# **Features**

- Small, compact & powerful for high torque applications
- Only 183 mm in length
- Brushless motor delivers torque up to 60 Nm (2.0 Ah) / 65 Nm (4.0 Ah)

**18V BRUSHLESS HAMMEDRILL DRIVER** 

- 2 speeds 0-500 / 0-1950 rpm
- Robust mode selector with By-Pass
- LED for work place illumination
- Forward and reverse
- 13mm Metal chuck for improve durability
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

#### **Specifications**

	BSB18C2BL LI-202C	BSB18C2BL LI-402C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	2.0	4.0
No. of batteries supplied	2	2
Charger supplied	40 min	100 min
Max. drilling wood/ steel/ masonry (mm)	40/13/13	40/13/13
Chuck capacity (mm)	13	13
Max. torque (Nm)	60	65
No load speed (rpm)	1950	1950
Max. percussion rate (bpm)	25350	25350
Weight with battery pack (kg)	1.8kg	2.0kg
Supplied in	Plastic case	Plastic case
Article Number	4935464096	4935464097
EAN Code	4058546220419	4058546220426

















## **18V PREMIUM HAMMERDRILL DRIVER**



**BSB 18** 

#### **Features**

- New high performance open frame motor
- Compact & powerful for high torque applications
- 80 Nm maximum torque delivers complete power
- · Full metal gearbox and housing for superior durability
- 2-speeds 0-450 / 0-1600 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm full metal Rohm keyless chuck, with spindle lock
- LED for work place illumination
- 3 mode selector ease of use between applications
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of battery and tool
- Supplied with a side handle

#### **Specifications**

	BSB 18 LI-402C
Battery type	Li-ion
Battery pack capacity (Ah)	4.0
No. of batteries supplied	2
Charger supplied	80 min
Max. drilling wood/ steel/ masonry (mm)	55/13/16
Chuck capacity (mm)	1.5-13
Max. torque (Nm)	80
No load speed (rpm)	0 - 450/0 - 1600
Max. percussion rate (bpm)	7.200 - 25.600
Weight with battery pack (kg)	2.5
Supplied in	Kitbox
Article Number	4935443452
EAN Code	4002395135769













# **Features**

- New 4 poles frameless motor and compact gear box
- Compact & powerful for high torque applications
- Only 202 mm in length
- 60 Nm (2.0 Ah) / 70 Nm (4.0 Ah) maximum torque delivers complete power

**18V COMPACT HAMMERDRILL DRIVER** 

- 2-speeds 0-450 / 0-1650 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm keyless chuck, with spindle lock
- LED for work place illumination
- 3 mode selector ease of use between applications
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of battery and tool
- Supplied with a side handle

	BSB 18C Li-202C	BSB 18C Li-402C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	1.8	4.0
No. of batteries supplied	2	2
Charger supplied	40 min	80 min
Max. drilling wood/ steel/ masonry (mm)	45/13/14	45/13/14
Chuck capacity (mm)	1.5-13	1.5-13
Max. torque (Nm)	60	70
No load speed (rpm)	0 - 450/0 - 1650	0 - 450/0 - 1650
Max. percussion rate (bpm)	21.450	21.450
Weight with battery pack (kg)	2	2.2
Supplied in	Kitbox	Kitbox
Article Number	4935443980	4935443997
EAN Code	4002395135684	4002395135745















### **18V HAMMERDRILL DRIVER**



BSB 18G2

#### **Features**

- Compact & powerful for completion of all jobsite applications
- 50 Nm maximum torque delivers complete power
- 2 speeds 0-400 / 0-1500 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm single sleeve full metal chuck
- 3 mode selector ease of use between functions
- Built in fuel gauge
- LED for work place illumination
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of both

# **Specifications**

	BSB 18G2 LI-152C
Battery type	Li-ion
Battery pack capacity (Ah)	1.5
No. of batteries supplied	2
Max. drilling wood/ steel/ masonry (mm)	34/13/12
Chuck capacity (mm)	1.5-13
Max. torque (Nm)	50
No load speed (rpm)	0 - 400/0 - 1500
Weight with battery pack (kg)	1.9
Supplied in	Kitbox
Article Number	4935433970
EAN Code	4002395134489



















**BSB 18C2X** 

#### **Features**

- Small, compact & powerful for high torque applications
- 206 mm in length and only 164 mm without the chuck

**18V HAMMERDRILL DRIVER** 

- 50 Nm (2.0 Ah) / 60 Nm (4.0 Ah) maximum torque delivers complete power
- 2 speeds 0-450 / 0-1800 rpm
- 13mm Metal removable chuck for improve durability and more versatility
- Robust mode selector with By-Pass
- LED for work place illumination
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

# **Specifications**

	BSB18C2X LI-202C
Battery type	Li-ion
Battery pack capacity (Ah)	2,0
No. of batteries supplied	2
Charger supplied	40 min
Chuck capacity (mm)	13 mm removable chuck
Max. torque (Nm)	50 Nm
No load speed (rpm)	0-450/0-1800
Max. drilling wood/ steel/ masonry (mm)	45mm/13mm/14mm
Supplied in	Toolbox
Article Number	4935459424
EAN Code	4058546010850















### **18V HAMMERDRILL DRIVER**



BSB 18C2

#### **Features**

- Small, compact & powerful for high torque applications
- Only 191 mm in length
- 50 Nm (2.0 Ah) / 60 Nm (4.0 Ah) maximum torque delivers complete power
- 2 speeds 0-450 / 0-1800 rpm
- Robust mode selector with By-Pass
- LED for work place illumination
- Forward and reverse
- 13mm Metal chuck for improve durability
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of

# **Specifications**

	BSB18C2 LI-202C
Battery type	Li-ion
Battery pack capacity (Ah)	2,0
LED	Yes
Max. drilling wood/ steel/ masonry (mm)	45mm/13mm/14mm
No load speed (rpm)	0-450/0-1800
Max. torque (Nm)	50 Nm
No. of batteries supplied	2
Supplied in	Toolbox
Article Number	4935459722
EAN Code	4058546028947



PRO 18v







BS 18 CBL



# **18V BRUSHLESS DRILL DRIVER**

#### **Features**

- New AEG Brushless drill driver
- Compact and powerful for every jobsite application
- Only 176mm in length for an extremely compact and perfect balanced drill driver • 60 Nm with a (2.0 Ah) / 75 Nm with a (4.0 Ah) battery for maximum torque delivers complete power
- 2 speeds 0-550 / 0-2100 rpm
- 13 mm ratchet chuck for withstanding the heaviest application and a perfect torque transmission to the
- New microtexture overmould for the best handling on the market
- LED light on the foot print to illuminate the work surface
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool
- Supplied with a side handle

	BS 18CBL LI-202C
Battery type	Li-ion
Battery pack capacity (Ah)	2.0
No. of batteries supplied	2
Charger supplied	40 min
Chuck capacity (mm)	1.5-13
Max. torque (Nm)	60
No load speed (rpm)	0-550 /0-2100
Weight with battery pack (kg)	1.8
Supplied in	Kitbox
Article Number	4935448768
EAN Code	4002395294572















# **18V BRUSHLESS DRILL DRIVER**



BS 18C2BL

#### **Features**

- Small, compact & powerful for high torque applications
- Only 176 mm in length
- Brushless motor delivers torque up to 60 Nm (2.0 Ah) / 65 Nm (4.0 Ah)
- 2 speeds 0-500 / 0-1950 rpm
- Robust mode selector with By-Pass
- LED for work place illumination
- Forward and reverse
- 13mm Metal chuck for improve durability
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of

# **Specifications**

	BS18C2BL LI-202C	BS18C2BL LI-402C	
Battery type	Li-ion	Li-ion	
Battery pack capacity (Ah)	2.0	4.0	
No. of batteries supplied	2	2	
Charger supplied	40 min	80 min	
Max. drilling wood/ steel (mm)	40/30	40/13	
Chuck capacity (mm)	13mm	13mm	
Max. torque (Nm)	60	65	
No load speed (rpm)	1950	1950	
Weight with battery pack (kg)	1.7kg	1.9	
Article Number	4935464094	4935464095	
EAN Code	4058546220396	4058546220402	





4444















1-2

# **Features**

• New 4 poles frameless motor and compact gearbox

**18V COMPACT DRILL DRIVER** 

- Small, compact & powerful for high torque applications
- Only 186 mm in length
- 60 Nm (2.0 Ah) / 70 Nm (4.0 Ah) maximum torque delivers complete power
- 2 speeds 0-450 / 0-1650 rpm
- Integrated clutch and chuck for a more compact design
- LED for work place illumination
- Forward and reverse
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of battery and tool
- Supplied with a double ended bit and a side handle

#### **Specifications**

	BS 18C LI-202C	BS 18C LI-402C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	2.0	4.0
No. of batteries supplied	2	2
Charger supplied	40 min	80 min
Max. drilling wood/ steel (mm)	45/13	45/13
Chuck capacity (mm)	13	13
Max. torque (Nm)	60	70
No load speed (rpm)	0 - 450 / 0 - 1650	0 - 450 / 0 - 1650
Weight with battery pack (kg)	1.8	2.0
Supplied in	Kitbox	Kitbox
Article Number	4935443977	4935443994
EAN Code	4002395135677	4002395135738





















### **18V DRILL DRIVER**

# PRO 18v

BS 18G2

#### **Features**

- Compact & powerful for completion of all jobsite applications
- 50 Nm maximum torque delivers complete power
- 2 speeds 0 400 / 0 1500 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm single sleeve full metal chuck
- Built in fuel gauge
- LED for work place illumination
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of both battery and tool



	BS 18G2 LI-152C	
Battery type	Li-ion	
Battery pack capacity (Ah)	1.5	
No. of batteries supplied	2	
Charger supplied	60 min	
Max. drilling wood/ steel (mm)	34/13	
Chuck capacity (mm)	1.5 - 13	
Max. torque (Nm)	50	
No load speed (rpm)	0 - 400/0 - 1500	
Weight with battery pack (kg)	1.8	
Supplied in	Kitbox	
Article Number	4935433950	
EAN Code	4002395134441	





4777











1-2

BS 18C2X

#### **Features**

• Small, compact & powerful for high torque applications

**18V COMPACT DRILL DRIVER** 

- 202 mm in length and only 158 mm without the chuck
- 50 Nm (2.0 Ah) / 60 Nm (4.0 Ah) maximum torque delivers complete power
- 2 speeds 0-450 / 0-1800 rpm
- 13mm Metal removable chuck for improve durability and more versatility
- Robust mode selector with By-Pass
- LED for work place illumination
- Forward and reverse
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of battery and tool

	BS18C2X LI-202C
Battery type	Li-ion
Battery pack capacity (Ah)	2,0
No. of batteries supplied	2
Charger supplied	30 min
Max. torque (Nm)	50 Nm
Max. drilling wood/ steel/ masonry (mm)	45/13/14
No load speed (rpm)	450-1800 rpm
Weight with battery pack (kg)	1,72 kg
Supplied in	Toolbox
Article Number	4935459423
EAN Code	4058546010843













# **18V COMPACT DRILL/DRIVER**



BS 18C2

#### **Features**

- Small, compact & powerful for high torque applications
- Only 187 mm in length
- 50 Nm (2.0 Ah) / 60 Nm (4.0 Ah) maximum torque delivers complete power
- 2 speeds 0-450 / 0-1800 rpm
- Robust mode selector with By-Pass
- LED for work place illumination
- Forward and reverse
- 13mm Metal chuck for improve durability
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of

## **Specifications**

	BS18C2 LI-202C
Battery type	Li-ion
Battery pack capacity (Ah)	2,0
No. of batteries supplied	2
Charger supplied	40 min
Max. drilling wood/ steel/ masonry (mm)	45/13/14
Max. torque (Nm)	50 Nm
No load speed (rpm)	450-1800 rpm
Weight with battery pack (kg)	1,68 kg
Supplied in	Toolbox
Article Number	4935459721
EAN Code	4058546028930















**BSS 180P** 

# **Features**

- New Oil Pulse Technology allows to reduce the noise of the impact up to only 73dB
- Compact (152mm OAL) & Ergonomic Impact Driver
- Easy carriage with the belt clip, user can work hands free even on a ladder

18V OIL PULSE IMPACT DRIVER

- New Brushless Motor Technology allows extremly fast driving applications up to M14 Capacity
- 3 Speed Powerfull Gearbox delivers up to 2400rpm
- 100% backwards compatible with all 18V GBS Battery packs

# **Specifications**

BSS 18OP-0
Li-ion
0
-
0 - 550 / 0 - 1300 / 0 - 1700 ipm
22 / 54 / 73
0 - 1000 / 0 - 1800 / 0 - 2400
-
4935451631
4002395140985













## **18V ULTRA COMPACT IMPACT DRIVER**



#### **Features**

- Ultra compact, well balanced impact driver
- Only 145 mm overall length
- 158 Nm maximum torque
- Delivers up to 3100 impacts per minute for increased productivity
- Industrial metal gearbox and gears for extended life
- 1/4" Hex bit reception
- Built in LED illuminates work surface
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of battery and tool
- Supplied with a single PZ2 bit

# **Specifications**

	BSS 18C-0
Battery type	Li-ion
Battery pack capacity (Ah)	-
Max. torque (Nm)	158
No load speed (rpm)	0 - 2400
Impact rate (ipm)	0 - 3100
Tool reception	¹/₄″ Hex
Supplied in	-
Article Number	4935428405
EAN Code	4002395132140













#### **Features**

- Ultra compact, well balanced impact driver
- Only 196 mm overall length
- New Brushless Motor Technology allows extremly fast driving applications

**18V BRUSHLESS IMPACT WRENCH** 


- 500 Nm maximum torque/ 360Nm in second speed/ 270Nm in first speed
- Delivers 0–3500 impacts per minute for increased productivity
- 1/2" Square reception and delivered with 1/4" hex adaptor for screwdriving
- 4 Speed Gearbox, 3 Speeds plus Auto Stop Mode
- Built in Triple LED for perfect illumination of the work surface without any shadow effect

# **Specifications**

	BSS 18C 12ZBL-0	BSS 18C 12ZBL LI-402C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	- 4,0	
No. of batteries supplied	0 2	
Charger supplied	-	80 min
Max. torque (Nm)	500	500
No load speed (rpm)	1400 - 2750 1400 - 2750	
Impact rate (ipm)	0-3500 0-3500	
Tool reception	¹/₂″ square ¹/₂″ square	
Supplied in	-	Toolbox
Article Number	4935459426	4935459427
EAN Code	4058546010874	4058546010881







**TIGHT** 







### 18V ULTRA COMPACT IMPACT WRENCH



#### **Features**

- Ultra compact, well balanced impact driver
- Only 203 mm overall length
- 360 Nm maximum torque
- Delivers 0–3200 impacts per minute for increased productivity
- Industrial metal gearbox and gears for extended life
- 1/2" Square reception and delivered with 1/4" hex adaptor for screwdriving
- Built in Triple LED for perfect illumination of the work surface without any shadow effect

# **Specifications**

	BSS 18C 12Z-0	BSS 18C 12Z Li-402C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	-	4.0
No. of batteries supplied	0	2
Charger supplied	-	80 min
Max. torque (Nm)	360	360
No load speed (rpm)	0 - 2900	0 - 2900
Impact rate (ipm)	0 - 3200	0 - 3200
Tool reception	¹/2″ square	¹/₂″ square
Weight with battery pack (kg)	-	2.3
Supplied in	-	Kitbox
Article Number	4935446449	4935446456
EAN Code	4002395136247	4002395136254















# **18V CORDLESS SDS-PLUS ROTARY HAMMER**



#### **Features**

- L-shape SDS hammer for drilling and fixing into concrete up to 24 mm
- 2.3 Joule impact energy delivers high performance
- Rotary stop for light chiselling applications
- Hammer action stop for rotary drilling in wood and metal
- Metal gearbox for extended durability
- Safety clutch for user protection
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

#### **Specifications**

	BBH18-0	BBH 18 Li-402C	
Battery type	Li-ion	Li-ion	
Battery pack capacity (Ah)	-	4.0	
No. of batteries supplied	0	2	
Charger supplied	-	80 min	
Max. drilling wood/ steel/ concrete (mm)	30/13/24	30/13/24	
Blow energy (EPTA)(J)	2.3	2.3	
No load speed (rpm)	1400	1400	
Full load hammer action (bpm)	0 - 4200	0 - 4200	
Weight with battery pack (kg)	-	3.5	
Supplied in	-	Kitbox	
Article Number	4935408330	4935443457	
EAN Code	4002395132744	4002395135783	

















## **18V BRUSHLESS DRYWALL SCREWDRIVER**



#### **Features**

- Small Drywall Screwdriver weights with an OAL of 266mm/ 418mm with collated attachment
- Really powerfull motor with 5000rpm
- Push drive function for improved runtime and improved comfort
- Incredible runtime up to 3000 screws with a L1850R Battery
- Fine adjustment nose cone for setting desired countersink levels in single screw applications +/-5 mm
- Quick release 1/4" Hex chuck allows for easy bit change
- Compatible with all 18V AEG Batteries
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Belt clip to hang your tool quickly and easily

#### **Specifications**

	BTS18BL-0	BTS18BL-0KIT1	BTS18BL LI-202B
Battery type	Li-ion	Li-ion	Li-ion
Battery pack capacity (Ah)	-	-	2,0 Ah
Charger supplied	-	-	40 min
No. of batteries supplied	0	0	2
Tool reception	¹/₄″ Hex	¹/₄″ Hex	¹/₄″ Hex
Max. torque (Nm)	5 Nm	5 Nm	5 Nm
No load speed (rpm)	5000 rpm	5000 rpm	5000 rpm
Standard equipment	-	Collated attachment	2 x L1820R batteries with BL1218 Charger
Supplied in	-	Tool bag	Tool bag
Wood screws to (mm)	55mm	55 mm	55 mm
Article Number	4935459620	4935459621	4935464104
EAN Code	4058546027926	4058546027933	4058546220495

















# **Features**

• Compatible with 12V and 18V AEG Drywall Screwdriver

**DRYWALL COLLATED ATTACHMENT** 

- Compatible with most collated screws on the market
- Has an over all length of 238 mm
- Large opening allows quick cleaning of the drywall dust
- Large wheel for fine depth adjustment +/-3 mm
- Pre dented screw sizes, for quick tool free adjustment Accept screws from 25 mm up to 55 mm
- Max. screws diameter 4,2 mm



	BTS-BSA
Supplied in	Gift box
Article Number	4932459623
EAN Code	4058546027957











### **18 V BRUSHLESS CIRCULAR SAW**



BKS 18BL

#### **Features**

- New Brushless Motor with high speed and high torque
- Ultra Compact circular saw (341mm OAL)
- LED Light + dust blow
- Magnesium guard and die cast shoe keep the tool extremely light
- Supplied with a 190 mm TCT blade with 24 carbid teeth for a perfecty clean and fast cut
- Electronic motor brake, saw blade stops within seconds
- · Lock off switch for safety
- Spindle lock for fast blade changing
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of

#### **Specifications**

	BKS 18BL-0
Battery type	Li-ion
Battery pack capacity (Ah)	-
No. of batteries supplied	0
Charger supplied	-
No load speed (rpm)	3800
Max. cutting depth 45° (mm)	45
Max. cutting depth 90° (mm)	64
No load speed (rpm)	3800
Arbor size (mm)	30mm
Weight with battery pack (kg)	3.6
Supplied in	-
Article Number	4935451537
EAN Code	4002395146345















# **Features**

- Compact, light and well balanced
- Extremely fast cutting speed of 5000 rpm
- Magnesium base and upper guard for durability
- Large 50° bevel capacity
- Electronic motor brake, saw blade stops within seconds

18 V HEAVY DUTY CIRCULAR SAW

- Lock off switch for safety
- Spindle lock for fast blade changing
- $\bullet \quad \text{Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of} \\$ battery and tool
- Supplied with a 165 mm TCT blade and a side fence

# **Specifications**

	BKS 18-0
Battery type	Li-ion
Blade diameter (mm)	165
Arbor size (mm)	15.87 mm ( <sup>5</sup> /ε")
Bevel capacity (°)	50°
No load speed (rpm)	0 - 5000
Max. cutting depth 45/90° (mm)	41/54
Weight with battery pack (kg)	3.6
Supplied in	-
Article Number	4935431375
EAN Code	4002395132812













# 18 V BRUSHLESS RECIPROCATING SAW



BUS 18BL

#### **Features**

- The brushless motor deliveres up to 3.200spm
- Orbital function on board for cutting without pushing, perfect for overhead work
- 28mm stroke length for the fastest cutting performance on the market
- Quick release blade system, accept all standard recip saw blades
- Easy and quick adjustable shoe with tool free system
- Fuel gauge on board, always be aware about the remaining power
- LED enables perfect view on the work piece
- Rafter Hook for an easy carriage when you are on a ladder
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of



#### **Specifications**

	BUS18BL-0	
Battery type	Li-ion	
Battery pack capacity (Ah)	-	
No. of batteries supplied	0	
Charger supplied	-	
No load stroke rate (spm)	3.200spm	
Stroke length (mm)	28mm	
Weight without battery pack (kg)	3.1 kg	
Supplied in	Gift box	
Article Number	4935464032	
EAN Code	4058546219772	









# PRO 18v

**BUS 18** 

#### **Features**

- Pendulum action for increased performance
- 3600 strokes per minute and 19 mm stroke length for fast cutting applications
- Robust bladeclamp for demolition applications
- FIXTEC for fast and easy keyless blade change
- Adjustable shoe
- Saw blade can be turned 180° for various applications
- Variable speed trigger
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of battery and tool

18 V PENDULUM ACTION RECIPROCATING SAW

Supplied with 2 blades



#### **Specifications**

BUS 18-0
Li-ion
0
0 - 3600
3.5
-
4935431370
4002395132805













### **BRUSHLESS SLIDE MITRE SAW**



#### **Features**

- 18V Brushless motor designed for superior runtime and performance
- Dual 18v System, for longer runtime
- Dual Bevel Cut
- Clamp system, for a safer cut
- LED for perfect view on the cutting line and adjustable laser for quick and precise cut
- Blade depth adjustment, Allows for trenching applications
- 254mm Blade, providing fantastic cutting capacities upto 90mm x 305mm
- Only 15.5kg, for easy transportation on the jobsite
- Supplied with 48 tooth blade

#### **Specifications**

	BPS18-254BL-0
Battery type	Li-ion
Battery pack capacity (Ah)	-
Blade diameter (mm)	254mm
Max. cutting depth (mm)	90
No load speed (rpm)	3900
Max. cutting capacity 0 mitre/ 45 bevel [mm]	39 x 305
Max. cutting capacity 45° mitre/ 45° bevel (mm)	39 x 215
Max. cutting depth 45° (mm)	43
Mitre capacity left (°)	45
Mitre capacity right (°)	45
LED	Yes
Weight (kg)	15.5
Article Number	4935459336
EAN Code	4058546009977



















#### **Features**

• Pendulum action for increased cutting performance

**18 V HEAVY DUTY JIGSAW** 

- Metal gearbox for extended durability
- · Professional, die-cast aluminium base plate
- Patented FIXTEC system for fast keyless blade change
- Variable speed trigger
- Ergonomic soft-grip for comfortable use
- Electronic motor brake
- Supplied with a plastic shoe cover, an anti splintering device and 2 blades



# **Specifications**

	BST 18X-0
Battery type	Li-ion
Stroke length (mm)	26
No load stroke rate (spm)	0 - 2050
Bevel capacity (°)	45°
Max. cutting capacity soft wood (mm)	80
Weight with battery pack (kg)	3.5
Supplied in	-
Article Number	4935413130
EAN Code	4002395197460











### **18GA BRUSHLESS NAIL GUN**



B18N18

#### **Features**

- Vaccum Drive Technology provides cordless convenience, eliminating the need for a noisy compressor, bulky air hose or expensive gas cartridges
- Fires 18 Gauge (1.2mm) nails from 15,9 to 55mm long
- 2 firing modes, full sequential mode for precision and contact actuation mode for rapid fastening
- Grip-Light technology engages twin LEDs by grasping the handle
- Tool less depth and power adjustment helps to protect work surface and allows proper setting of nail
- Dry-fire lockout prevents the tool working without nails loaded
- Tool less jam release for easy removal of clear nails
- Belt hook mounts left or right side for added convenience
- includes 2 non-marring pads to keep work surface free of tool marks
- Up to 1450 Nails runtime using a L1840R battery pack
- Runtime can vary by tool, battery and application



## **Specifications**

B18N18-0	B18N18 LI-201C	
Li-ion	Li-ion	
-	2.0	
105	105	
1.2	1.2	
2/sec	2/sec	
4935451535	4935451536	
4002395146321	4002395146338	
	Li-ion - 105 1.2 2/sec 4935451535	Li-ion Li-ion  - 2.0  105 105  1.2 1.2  2/sec 2/sec  4935451535 4935451536





PRO 18v







# **16GA BRUSHLESS NAIL GUN**

# **Features**

- Vaccum Drive Technology provides cordless convenience, eliminating the need for a noisy compressor, bulky air hose or expensive gas cartridges
- Fires 16 Gauge (1.6mm) nails from 19 to 65mm long
- 2 firing modes, full sequential mode for precision and contact actuation mode for rapid fastening
- Grip-Light technology engages LED by grasping the handle
- Tool less depth and power adjustment helps to protect work surface and allows proper setting of nail
- Dry-fire lockout prevents the tool working without nails loaded
- Tool less jam release for easy removal of clear nails
- Belt hook mounts left or right side for added convenience
- includes 2 non-marking pads to keep work surface free of tool marks • Up to 1400 Nails runtime using a L1840R battery pack
- Runtime can vary by tool, battery and application



	B16N18-0
Battery type	Li-ion
Battery pack capacity (Ah)	-
Magazine capacity	105
Nail type (mm)	1.6
Cycle rate (h)	2/Sec
Weight with battery pack (kg)	3,0
Article Number	4935451533
EAN Code	4002395146307













# **18V BRUSHLESS BELTSANDER**



BHBS 18-75BL

#### **Features**

- Powerfull 18V brushless Sander
- Compct and lightweight Sander
- Variable speed dial match the speed of the sander with the specific application
- · Lock on button for comfortable operating
- Integrated dust absorption (DEK 26 system)
- Accepts up to 457mm belt length and 75mm belt width
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool



#### **Specifications**

	BHBS18-75BL-0
D-H	
Battery type	Li-ion
Battery pack capacity (Ah)	•
Belt length (mm)	457mm
Belt width (mm)	75mm
No load speed (m/min)	135-300m/min
No load speed (rpm)	11.000
Speed settings	6
Standard equipment	1x120grit sanding Belt, 1x 80grit sanding belt
Article Number	4935459582
EAN Code	4058546027544











#### **ORBITAL SANDER**



BEX18-125

#### **Features**

- Powerfull 18V motor 125mm random orbital sander
- Ideal for working in confined spaces and overhead
- Variable speed for optimum control
- Convenient hook & loop paper fastening
- Very efficient dust extraction, over 8 holes in the base plate • Dust extraction, with dust bag or absorption system
- Micro texture grip for perfect handling
- Supplied with dust bag and sanding paper



# **Specifications**

	BEX18-125 - 0	BEX18-125 LI-402C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	-	4.0
No. of batteries supplied	0	2
Charger supplied	-	80 min
No load speed (rpm)	7.000 - 11.000	7.000 - 11.000
Oscillation rate (opm)	14.000 - 22.000	14.000 - 22.000
Oscillation diameter (mm)	2.4	2.4
Sanding pad size (mm)	125	125
Weight with battery pack (kg)	-	2.1
Article Number	4935451086	4935451087
EAN Code	4002395811120	4002395811137











# **18V CORDLESS PLANER**



BHO 18

#### **Features**

- Additional front handle with soft grip for convenient two-hand working
- Large dust bag for a dust free working area
- Adjustment switch for easy adjustment of the cutting depth
- Front and rear shoe have a v-groove for easy chamfer cutting
- Automatic Kickstand to protect surfaces from accidental planer contact
- Lock off switch for safety
- Ergonomic handle design with large soft-grip area for maximum comfort
- Die-cast base plate for high durability



## **Specifications**

	BHO 18-0
Battery type	Li-ion
Battery pack capacity (Ah)	-
No. of batteries supplied	0
No load speed (rpm)	12.000
Planing depth (mm)	0 - 1.6
Planing width (mm)	82
Rebate depth (mm)	0 - 12.5
Weight with battery pack (kg)	-
Supplied in	-
Article Number	4935413175
EAN Code	4002395197552



PRO 18v







BOF 18BL



### **18V BRUSHLESS TRIM ROUTER**

#### **Features**

- 1-Hand cordless 18V brushless Trim Router
- Up to 25.000 rpm for rounding all type of wood
- Collect size 6 mm for the most common accessories on the market
- Spindle Lock: Detents enable quick and simple router bit changes
- Built in speed dial, for adjusting the speed for different materials
- Micro adjust dial: For easily adjusting the router depth to the specific material and application
- Magnesium guard for more durability
- Ergonomic Slim Grip for maximum comfort during extended use

# **Specifications**

Name	BOF18BL-0
Battery type	Li-ion
Collet capacity (mm)	6mm
Fuel gauge	Yes
No load speed (rpm)	17.000rpm to 25.000rpm
Plunge capacity (mm)	32mm
Speed settings	7
Standard equipment	Edge Guide, 6mm Bit + 6,35mm, Round and Square base, wrench
Article Number	4935459584
EAN Code	4058546027568













# **18 V HEAVY DUTY ANGLE GRINDER**



#### **Features**

- Compact and powerful cordless angle grinder
- Overload protection with LED warning
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Fast and tool-free disc change with patented FIXTEC nut
- Built in fuel gauge
- AEG Pro Lithium-Ion battery technology for maximum durability of battery and tool
- Supplied with a FIXTEC nut, flange nut, AVS side handle and a grinding keyless guard



#### **Specifications**

	BEWS 18-115X-0	BEWS 18-115X Li-402C		
Battery type	Li-ion	Li-ion	_	
Battery pack capacity (Ah)	-	4.0	_	
No. of batteries supplied	0	2		
Charger supplied	-	80 min	Ξ	
No load speed (rpm)	9.000	9.000	Π	
Max. cutting depth (mm)	28	28	_	
Spindle size	M14	M14	_	
Weight with battery pack (kg)	-	2.5	Τ	
Supplied in	-	Kitbox	Ξ	
Article Number	4935433319	4935443463	Π	
EAN Code	4002395133222	4002395136001	Τ	















# 18 V HEAVY DUTY ANGLE GRINDER





#### **Features**

- Compact and powerful cordless angle grinder
- Overload protection with LED warning
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Fast and tool-free disc change with patented FIXTEC nut
- Built in fuel gauge
- AEG Pro Lithium-lon battery technology for maximum durability of battery and tool
- Supplied with a FIXTEC nut, flange nut, AVS side handle and a grinding keyless guard



#### **Specifications**

	BEWS 18-125X-0	BEWS 18-125X Li-402C	
Battery type	Li-ion	Li-ion	
Battery pack capacity (Ah)	-	4.0	
No. of batteries supplied	0	2	
Charger supplied	-	80 min	
No load speed (rpm)	9.000	9.000	
Max. cutting depth (mm)	33	33	
Spindle size	M14	M14	
Weight with battery pack (kg)	-	2.5	
Supplied in	-	Kitbox	
Article Number	4935431998	4935443460	
EAN Code	4002395132980	4002395135790	



9000









# **DAB+ DIGITAL JOBSITE RADIO**



PRO 18v

#### **Features**

- Ultra compact AC/DC jobsite Radio 1,1Kg
- 150mm width only, fits on almost all window frames
- New Pro Lithium-Ion 5.0Ah provides over 20 hours runtime
- Back light Display allows perfect visibility
- 10 channel pre set fro FM/ 10 channel pre set for DAB+
- DAB+ compatible
- Aux Cable Connector (Ipod, Phone)
- Water and debris resistant to withstand tough conditions on the jobsite
- Accept all 12V stem packs and all Pro 18V packs
- 240V 2 pin EU plug transformer included



#### **Specifications**

Name	BR 1218C-0
Voltage (V)	18
Weight (kg)	1.1
Article Number	4935451539
EAN Code	4002395146369



**BR 18C** 



#### **JOBSITE RADIO**

#### **Features**

- FM AM tuner
- Aux mode for MP3 player or smartphone
- Suitable for 18V 1,5Ah / 2,0Ah / 3,0Ah and 4,0Ah pack
- IP54 for outdoor usage
- Shock resistant construction to withstand the Jobsite abuses



# **Specifications**

	BR 18C-0
Voltage (V)	18
Weight without battery pack (kg)	0.8
Article Number	4935447634
EAN Code	4002395294251







# **18V LED SITE LIGHT**



BFL18X

#### **Features**

- High performance flood light LEDs with rotary encoder technology automatically adjusts lighting in high
- Detachable from stand for added portability
- Dimming function makes it easy to adjust the light level
- Multiple hanging positions
- Possibility to mount the flood light on the AEG tripod



## **Specifications**

Name	BFL18X-0
Battery type	Li-ion
Battery pack capacity (Ah)	-
Bulb type	LED
IP protection class	IP44
Lumens	1.200
No. of batteries supplied	0
Supplied in	-
Weight without battery pack (kg)	1.8
Article Number	4935459657
EAN Code	4058546028299



















#### **Features**

**18V LED SITE LIGHT** 

- High performance torch light, LED's with rotary encoder technology automatically adjusts lighting in high heat conditions
- Handheld design with belt clip makes this unit extremely portable
- Dimming function allows for correct light/concentration level per application
- Rotating head allows for multi directional concentrated light source
- 12V car adaptor included
- Up to 32 hrs runtime on low setting from 5.0Ah Battery pack



# **Specifications**

Name	BTL18-0
Battery type	Li-ion
Battery pack capacity (Ah)	-
Bulb type	LED
IP protection class	IP24
Lumens	2.100
No. of batteries supplied	0
Weight without battery pack (kg)	1.3
Article Number	4935459659
EAN Code	4058546028312











# **18V LED SITE LIGHT**



BPL18

#### **Features**

- High performance LED Panels with rotary encoder technology automatically adjusts lighting in high heat
- Hybrid design makes this unit versatile for worksite, camping or workshop
- Dimming function allows for correct light level per application
- Multiple hanging positions
- Folding panels enable multi directional lighting capabilities
- Up to 25 hrs runtime on low setting from 6.0Ah Battery pack



## **Specifications**

	BPL18-0	
Battery type	Li-ion	
Battery pack capacity (Ah)	-	
Bulb type	LED	
Lumens	2.500	
No. of batteries supplied	0	
Standard equipment	2,5m AC power cord	
Weight without battery pack (kg)	2.5	
Supplied in	-	
Article Number	4935459661	
EAN Code	4058546028336	











# **LIGHT TRIPOD STAND**



#### **Features**

- Rugged and lightweight aluminium mast construction
- · Wide leg base, with weight ballasts for extra stability
- Compact storage footprint with carry handle enable ultimate portability
- Easy lock level adjustment with bubble level
- Multiple mounting points with standard 1/4" thread size means a huge number of mounting applications
- Equipped with clip for attaching the laser distance measurer LDM 50



#### **Specifications**

Name	LUS-210X
Length (mm)	882
Length extended (mm)	2100
Loading capacity	4.5kg per arm
Weight (kg)	3.9
Article Number	4935459663
EAN Code	4058546028350

For further technical specifications, including noise and vibration data, please visit our website: www.aeg-powertools.com











2,100

LUMEN

# **18V LED FLASH LIGHT**



#### **Features**

- New AEG compact and lightweight 18V torch light
- High quality LED, which provides 135 lumen
- Swivel Head rotates up to 180° which allows the user to direct the light beam at the desired work area
- Rubberized soft grip increased the comfort on the job site
- Belt clip mountable
- Extensive runtime up to 25hrs with a 18V 4,0Ah Pro Lithium Ion Battery
- Compatible with all PRO 18V Lithium-Ion batteries



### **Specifications**

**Features** 

	FL18 - 0
Battery type	-
Battery pack capacity (Ah)	-
Bulb type	LED
Lumens	135 lm
Weight with battery pack (kg)	0,808
Article Number	4932451164
EAN Code	4002395138333











# **18V INSPECTION LIGHT**



- New AEG compact and flexible 18V inspection light
- High quality LED, which provides 270 lumen
- Dual Mode LED for directional spotlight or area light
- Flexible head which allows 360° rotation • Light can be used standing on its base or wrapped around a pipe
- Extensive runtime up to 18hrs with a 18V 4,0Ah Pro Lithium Ion Battery
- Compatible with all PRO 18V Lithium-Ion batteries



## **Specifications**

	BFAL 18 - 0
Battery type	Li-ion
Bulb type	LED
Lumens	270 lm
Supplied in	-
Article Number	4932451163
EAN Code	4002395138326







# **FLASHLIGHTS / BATTERY LAMPS**



#### **Features**

- Compact directional light source for confined spaces.
- LED Light with 2 sources, directional spot or area light
- Clip for hanging or mounting



## **Specifications**

	BAL 18-0
Voltage (V)	18
Weight without battery pack (kg)	0.3
Article Number	4932352661
EAN Code	4002395373192







### **18V USB CHARGER**



BHJ18C

#### **Features**

- Compatable with all 18v PROLITHIUM-ION™ AEG Batteries
- Makes it possible to run the 12V Heated Gear out of a 18v PROLITHIUM-ION™ Batterypack
- USB charging port for MP3 player, mobile phone, digital camera, GPS
- Belt Clip for maximum comfort
- On/Off switch for USB port



	BHJ18C-0
Battery type	Li-ion
Battery pack capacity (Ah)	•
Charger supplied	-
No. of batteries supplied	0
Article Number	4935459335
EAN Code	4058546009960



### 18V 9.0 AH PROLITHIUM-ION™ BATTERY



L1890RHD

#### **Features**

- $\bullet \ \ \mathsf{AEG} \ \mathsf{Powetools} \ \mathsf{Lithium\text{-}lon} \ \mathsf{technology} \ \mathsf{provides} \ \mathsf{the} \ \mathsf{optimum} \ \mathsf{power} \ \mathsf{Battery} \ \mathsf{platform} \ \mathsf{with} \ \mathsf{triple}$
- Thermal overload protection: Protects Battery if Temperature gets too high
- Current overload protection: Shuts down the pack in order to protect battery and tool from high current
- Individual cell monitoring: Protects individual cells from over discharging



#### **Specifications**

Name	L1890RHD
Battery type	Li-ion
Battery pack capacity (Ah)	9.0
Voltage (V)	18
Article Number	4932464231
EAN Code	4058546221768









### 18V 5.0 AH PROLITHIUM-ION™ BATTERY



L1850R

#### **Features**

- AEG Powetools Lithium-Ion technology provides the optimum power Battery platform with triple
- Thermal overload protection: Protects Battery if Temperature gets too high
- Current overload protection: Shuts down the pack in order to protect battery and tool from high current
- Individual cell monitoring: Protects individual cells from over discharging
- Same size and weight as the 4.0Ah but with 25% more runtime
- Backwards compatible with ALL AEG 18V tools



#### **Specifications**

Name	L1850R
Battery type	Li-ion
Battery pack capacity (Ah)	5.0
Voltage (V)	18
Article Number	4932451630
FAN Code	4002395140978









### 18V 4.0 AH PROLITHIUM-ION™ BATTERY



L1840R

#### **Features**

- AEG Powetools Lithium-lon technology provides the optimum power Battery platform with triple
- Thermal overload protection: Protects Battery if Temperature gets too high
- Current overload protection: Shuts down the pack in order to protect battery and tool from high current
- Individual cell monitoring: Protects individual cells from over discharging
- Backwards compatible with ALL AEG 18V tools
- On-board battery fuel gauge helps the user to maximize his battery run-time efficiency
- · Large heat sink that dissipates heat quicker
- Rubber dampers which absorb movement and prevent damage
- Double spot welds ensure durabilty during high vibration applications and are more resistant to heat



#### **Specifications**

Name	L1840R
Battery type	Li-ion
Battery pack capacity (Ah)	4.0
Voltage (V)	18
Article Number	4932430170
EAN Code	4002395378319









# 18V 3.0 AH PROLITHIUM-ION™ BATTERY



L1830R

#### **Features**

- AEG Powetools Lithium-Ion technology provides the optimum power Battery platform with triple protection
- Thermal overload protection: Protects Battery if Temperature gets too high
- · Current overload protection: Shuts down the pack in order to protect battery and tool from high current
- Individual cell monitoring: Protects individual cells from over discharging
- Backwards compatible with ALL AEG 18V tools
- On-board battery fuel gauge helps the user to maximize his battery run-time efficiency
- Large heat sink that dissipates heat quicker
- Rubber dampers which absorb movement and prevent damage.
- Double spot welds ensure durabilty during high vibration applications and are more resistant to heat



Name	L1830R
Battery type	Li-ion
Battery pack capacity (Ah)	3.0
Voltage (V)	18
Article Number	4932352655
EAN Code	4002395373130









### 18V 2.0 AH PROLITHIUM-ION™ BATTERY



L1820R

- AEG Powetools Lithium-lon technology provides the optimum power Battery platform with triple protection
- Thermal overload protection: Protects Battery if Temperature gets too high
- Current overload protection: Shuts down the pack in order to protect battery and tool from high current
- Individual cell monitoring: Protects individual cells from over discharging
- Backwards compatible with ALL AEG 18V tools
- On-board battery fuel gauge helps the user to maximize his battery run-time efficiency
- Large heat sink that dissipates heat quicker
- Rubber dampers which absorb movement and prevent damage.
- Double spot welds ensure durabilty during high vibration applications and are more resistant to heat



#### **Specifications**

Name	L1820R
Battery type	Li-ion
Battery pack capacity (Ah)	2.0
Voltage (V)	18
Article Number	4932430169
EAN Code	4002395378302











#### **Features**

AEG Powetools Lithium-Ion technology provides the optimum power Battery platform with triple

18V 1.5 AH PROLITHIUM-ION™ BATTERY

- Thermal overload protection: Protects Battery if Temperature gets too high
- . Current overload protection: Shuts down the pack in order to protect battery and tool from high current
- Individual cell monitoring: Protects individual cells from over discharging
- Backwards compatible with ALL AEG 18V tools
- · Large heat sink that dissipates heat quicker
- Rubber dampers which absorb movement and prevent damage
- Single latch release



# **Specifications**

Name	L1815G
Battery type	Li-ion
Battery pack capacity (Ah)	1.5
Voltage (V)	18
Article Number	4932459425
EAN Code	4058546010867







# 18V 4.0 AH PROLITHIUM-ION™ BATTERY WITH BL1218 CHARGER IN A BAG



SET L1840 BL

#### **Features**

- BL1218 standard Charger with 1 x 18V 4,0Ah Battery in a Sports Bag
- AEG Powetools Lithium-lon technology provides the optimum power Battery platform with triple
- Thermal overload protection: Protects Battery if Temperature gets too high
- Current overload protection: Shuts down the pack in order to protect battery and tool from high current
- Individual cell monitoring: Protects individual cells from over discharging
- On-board battery fuel gauge helps the user to maximize his battery run-time efficiency



# **Specifications**

Li-ion
Liton
4,0 Ah
80 min
1
Tool bag
4932430359
4002395380206









# **18V 5.0AH PROLITHIUM BATTERY** WITH BLK1218 FAST CHARGER



SET L1850BLK

#### **Features**

- 12V-18V Twin Charger with fast charging and Car Plug with 1x18V 5,0Ah Battery Pack and a Bag
- $\bullet \ \ \mathsf{AEG} \ \mathsf{Powetools} \ \mathsf{Lithium\text{-}lon} \ \mathsf{technology} \ \mathsf{provides} \ \mathsf{the} \ \mathsf{optimum} \ \mathsf{power} \ \mathsf{Battery} \ \mathsf{platform} \ \mathsf{with} \ \mathsf{triple}$
- Thermal overload protection: Protects Battery if Temperature gets too high
- · Current overload protection: Shuts down the pack in order to protect battery and tool from high current
- Individual cell monitoring: Protects individual cells from over discharging
- On-board battery fuel gauge helps the user to maximize his battery run-time efficiency



Name	SET L1850BLK
Battery type	Li-ion
Battery pack capacity (Ah)	5.0 Ah
Charger supplied	100 min
No. of batteries supplied	1
Supplied in	Tool bag
Article Number	4932451629
EAN Code	4002395140961









# 18V 2 X 2.0AH PROLITHIUM-ION BATTERY WITH **BL1218 CHARGER IN A BAG**



#### **Features**

- BL1218 standard Charger with 2 x L1820R in a Bag
- AEG Powetools Lithium-lon technology provides the optimum power Battery platform with triple
- Thermal overload protection: Protects Battery if Temperature gets too high
- Current overload protection: Shuts down the pack in order to protect battery and tool from high current
- Individual cell monitoring: Protects individual cells from over discharging
- On-board battery fuel gauge helps the user to maximize his battery run-time efficiency



#### **Specifications**

	SET LL1820BL
Battery type	Li-ion
Battery pack capacity (Ah)	2.0
Charger supplied	40 min
No. of batteries supplied	2
Supplied in	Tool bag
Article Number	4932451626
EAN Code	4002395140923













BLK1218

# **Features**

- Provides fast charging capacity for stem and slide Battery packs out of 240V powersource
- Combined with a DC car plug for charging tools out of a 12V DC socket

12-18V FAST TWIN CHARGER

- Quick and easy understanding about the charging status though Intuitive LED interface
- Charges 18V 5,0Ah out of main 240V power in 60mins / out of 12V DC plug in 90mins



### **Specifications**

Name	BLK1218
Battery type	Li-ion
Article Number	4932451538
EAN Code	4002395146352







## **CHARGER**



#### **Features**

- Power LED: Indicates if the charger is plugged on an energy source
- Evaluate LED: Indicates when the charger is analyzing the battery status
- Defect LED: Blinks when the pack is defective
- Charging LED: Blinks when the battery is charging, stays when the pack is charged
- Temperature LED: Blinks when the pack is too hot or too cold and needs to be cooled or warmed before charging



## **Specifications**

Name	BL 1218 GEN II
Battery type	Li-ion, NiCd, NiMH
Charging range	12 - 18 V
Article Number	4932352659
EAN Code	4002395373178





# **18V CHARGER**



AL1218G

#### **Features**

• 18V Charger



	AL1218G
Battery type	Li-ion, NiCd, NiMH
Charging range	12 - 18 V
Charging time	60 min
Article Number	4932352528
FAN Code	4002395371860





# 14.4 V COMPACT HAMMERDRILL/DRIVER

PRO Li THIUM

#### **Features**

- 3 mode selector
- Powerful new frameless motor delivering 50 Nm maximum torque
- 2 speeds 0-400 / 0-1500 rpm
- FIXTEC 13 mm keyless chuck

**Specifications** 

Battery pack capacity (Ah)

Max. percussion rate (bpm)

Weight with battery pack (kg)

Chuck capacity (mm)

No load speed (rpm)

Max. torque (Nm)

Supplied in

EAN Code

Article Number

Max. drilling wood/ steel/ masonry (mm)

No. of batteries supplied

Charger supplied

Battery type

· Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

BSB 14C LI-202C

2.0

40 min

45/13/14

19.500

1.5 - 13

0 - 400/0 - 1500

50

1.8 Kitbox























# 14.4 V COMPACT HAMMERDRILL/DRIVER

4935443974

4002395136025

PRO Li THIUM

1-2

#### **Features**

- Compact (190mm OAL) & powerful for completion of all jobsite applications
- 36 Nm maximum torque delivers complete power
- 2 speed Gearbox 0-400 / 0-1700 rpm
- 24-stage torque adjustment • 13 mm single sleeve metal chuck with full metal jaws
- 3 mode selector ease of use between functions
- LED for work place illumination and built in Fuel Gauge
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool\*



# **Specifications**

	BSB14G3 LI-202C
Battery type	Li-ion
Battery pack capacity (Ah)	2.0
No. of batteries supplied	2
Max. drilling wood/ steel (mm)	32/13
Max. torque (Nm)	36
No load speed (rpm)	0-400 / 0-1700
Supplied in	Kitbox
Article Number	4935451532
EAN Code	4002395145690









# 14.4 V COMPACT DRILL/DRIVER

# PRO Li THIUM

#### **Features**

- Ultra compact drill/driver measuring 186 mm in length
- Powerful new frameless motor delivering 50 Nm maximum torque
- 2 speeds 0-400 / 0-1500 rpm
- FIXTEC 13 mm keyless chuck

**Specifications** 

Battery pack capacity (Ah)

Max. drilling wood/ steel (mm)

No. of batteries supplied

Charger supplied

Max. torque (Nm)

Supplied in

EAN Code

Article Number

Chuck capacity (mm)

No load speed (rpm) Weight with battery pack (kg)

Battery type

 Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of battery and tool

BS 14C LI-202C

2.0

1.7

Kitbox

4935443971

4002395135653

40 min 45/13

1.5-13 mm 50

0 - 400 / 0 - 1500





**50** 







PRO Li THIUM





**Features** 

- Compact (Up to 180mm OAL) & powerful for completion of all jobsite applications
- Up to 36 Nm maximum torque delivers complete power

14 V COMPACT DRILL DRIVER

- 2 speeds 0-400 / 0-1700 rpm
- 24 stage torque adjustment for complete control
- 13 mm single sleeve metal chuck with full metal jaws (202C Version only)
- Built in fuel gauge (202C Version only)
- LED for work place illumination (202C Version only)
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of battery and tool\*



	BS 14G3 LI-152C	BS 14G3 LI-202C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	1.5	2.0
No. of batteries supplied	2	2
Charger supplied	60 min	80 min
Max. drilling steel (mm)	10	13
Max. drilling wood (mm)	30	32
Chuck capacity (mm)	0.8 - 10	2.0 - 13
Max. torque (Nm)	32	36
No load speed (rpm)	0 - 400 / 0 - 1700	0 - 400 / 0 - 1700
Weight with battery pack (kg)	1.2	1.2
Supplied in	Kitbox	Kitbox
Article Number	4935451092	4935451093
EAN Code	4002395811182	4002395811199













# 12 V COMPACT HAMMERDRILL/DRIVER

PRO Li THIUM

BSB12G3

#### **Features**

- Compact (188mm OAL) & powerful for completion of all jobsite applications
- 32 Nm maximum torque delivers complete power
- 2 speed Gearbox 0-350 / 0-1500 rpm
- 24-stage torque adjustment
- 10 mm single sleeve chuck with full metal jaws
- 3 mode selector ease of use between functions
- New 12V 2.0Ah pro Lithium pack delivering higher power and higher runtime
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool
- Built in LED and Fuel Gauge

# **Specifications**

	BSB 12G3 LI-202C
Battery type	Li-ion
Battery pack capacity (Ah)	2.0
No. of batteries supplied	2
Charger supplied	80 min
Max. drilling wood (mm)	30
Max. drilling steel (mm)	10
Chuck capacity (mm)	0.8 - 10
Max. torque (Nm)	32
No load speed gear 1 (rpm)	0 - 350
No load speed gear 2 (rpm)	0 - 1500
Weight with battery pack (kg)	1.2
Supplied in	Kitbox
Article Number	4935451531
EAN Code	4002395145683

















#### **Features**

- Compact (180mm OAL) & powerful for completion of all jobsite applications
- Up to 32 Nm maximum torque delivers complete power.

12 V COMPACT DRILL DRIVER

- 2 speed Gearbox delivering 0-350 / 0-1500 rpm • 24-stage torque adjustment for complete control
- 10 mm single sleeve chuck with full metal jaws
- New 12V 2.0 Ah pro lithium pack delivering higher power and higher runtime (202C Version only)
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

#### **Specifications**

Name	BS 12G3 LI-152C	BS 12G3 LI-202C
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	1.5	2.0
No. of batteries supplied	2	2
Charger supplied	60 min	80 min
Max. torque (Nm)	30	32
Max. drilling wood (mm)	30	30
Max. drilling steel (mm)	10	10
No load speed (rpm)	0 - 350/0 - 1500	0 - 350/0 - 1500
Chuck capacity (mm)	0.8 - 10	0.8 - 10
Weight with battery pack (kg)	1.1	1.1
Supplied in	Kitbox	Kitbox
Article Number	4935451090	4935451091
EAN Code	4002395811168	4002395811175











# 12 V 2-SPEED DRILL DRIVER



BBS 12C2

#### **Features**

- Removable chuck system allows user to keep a 25 mm screwdriving bit in the reception when the chuck is installed
- Extremely compact percussion drill 192 mm length with the chuck / 155 mm without
- . LED light with twilight mode allows to work in tight and confine spacesLED light with twilight mode allows to work in tight and confine spaces
- Belt clip for easy carriage
- Built in fuel gauge
- High torque 32 Nm for a wide range of applications
- Offset and right angle attachments delivering the same performance as the tool itself, no more need to cope with torque level or drilling speed
- Full metal planetary gears and gear housing for maximum durability
- Compatible & Versatile
- Possible to fix the chuck on the right angle attachment in order to have a right angle drill
- Ideal for all application in series that required pre-drilling
- $25 \, \mathrm{mm} \, \mathrm{screw} \, \mathrm{driving} \, \mathrm{bit} \, \mathrm{can} \, \mathrm{be} \, \mathrm{let} \, \mathrm{in} \, \mathrm{the} \, \mathrm{reception} \, \mathrm{when} \, \mathrm{the} \, \mathrm{attachment} \, \mathrm{is} \, \mathrm{installed}$
- - Once the hole drilled, then just pull the chuck out to drive your screw. No more need of 2 drills!

#### **Specifications**

	BBS 12C2 LI-202B	BBS 12C2 Li-202C KIT 1
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	2.0	2.0
No. of batteries supplied	2	2
Charger supplied	40 min	40 min
Max. drilling wood/ steel (mm)	20/10	20/10
Max. torque (Nm)	32	32
No load speed (rpm)	0 - 400/0 - 1500	0 - 400/0 - 1500
Standard equipment	Removable chuck, screwdriving bit, belt clip	Removable chuck, chuck offset attachment, screwdriving bit, belt clip
Weight with battery pack (kg)	1.2	1.2
Supplied in	Tool bag	Kitbox
Article Number	4935446693	4935446382
EAN Code	4002395136377	4002395136131









# 12 V 2-SPPED ULTRA COMPACT PERCUSSION DRILL



4777

BSB 12C2

#### **Features**

- Compact hammer drill/driver measuring only 192 mm
- Built in fuel gauge
- Belt clip
- 2-speed gearbox for a wide range of applications
- Industrial metal gearbox and gears for superior durability
- FIXTEC spindle lock and keyless 10 mm chuck
- Electronic switch with variable speed
- 3 mode selector ease of use between applications
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of
- Powerfull Torque of 32 Nm (2.0Ah) / 40 Nm (4.0Ah) for all driving applications

	BSB 12C2 LI-202B	BSB 12C2 LI-402B
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	2.0	4.0
No. of batteries supplied	2	2
Charger supplied	40 min	80 min
Max. drilling wood/ steel/ masonry (mm)	20/10/10	20/10/10
Max. percussion rate (bpm)	22.500	22.500
Chuck capacity (mm)	10	10
Max. torque (Nm)	32	40
No load speed (rpm)	0 - 400/0 - 1500	0 - 400/0 - 1500
Supplied in	Tool bag	Tool bag
Article Number	4935443964	4935446696
EAN Code	4002395135622	4002395136384
















### **NEW COMPACT SCREWDRIVER**



#### **Features**

- New compact screwdriver
- 17-stage torque adjustment plus additional drilling stage
- 2-speed gearbox for a wide range of applications
- Built in fuel gauge
- Belt clip
- FIXTEC spindle lock on keyless 10mm chuck
- Electronic switch with variable speed
- Built in LED light illuminates the work surface
- Features AEG Pro-Lithium-Ion battery technology with overload protection for maximum durability of



# **Specifications**

	BS12C2 LI-152B	BS12C2 LI-202B	BS 12C2 Li-202C New
Battery type	Li-ion	Li-ion	Li-ion
Battery pack capacity (Ah)	1.5	2.0	2.0
No. of batteries supplied	2	2	2
Charger supplied	30 min	40 min	40 min
Max. drilling wood (mm)	20	20	20
Max. drilling steel (mm)	10	10	10
Max. torque (Nm)	34	34	34
No load speed (rpm)	0 - 350/0 - 1500	0 - 350/0 - 1500	0 - 350/0 - 1500
Weight with battery pack (kg)	1.1	1.1	1.1
Supplied in	Tool bag	Tool bag	Kitbox
Article Number	4935448464	4935448465	4935447867
EAN Code	4002395259380	4002395259397	4002395135585



















# PRO 12v

4777

#### **Features**

Compact pocket drill/screwdriver measuring only 161 mm

12 V ULTRA COMPACT DRILL/DRIVER

- Built in fuel gauge
- 17-stage torque adjustment plus additional drilling stage
- Industrial metal gearbox and gears for superior durability
- FIXTEC spindle lock and keyless 10 mm chuck
- Electronic switch with variable speed
- Built in LED light illuminates the work surfaces
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool



# **Specifications**

	BS 12C LI-151B	BS 12C LI-152B
Battery type	Li-ion	Li-ion
Battery pack capacity (Ah)	1.5	1.5
No. of batteries supplied	1	2
Charger supplied	30 min	30 min
Max. drilling wood/ steel (mm)	20/10	20/10
Max. torque (Nm)	18.5	18.5
No load speed (rpm)	0 - 575	0 - 575
Weight with battery pack (kg)	1.0	1.0
Supplied in	Tool bag	Tool bag
Article Number	4935433901	4935433902
EAN Code	4002395126347	4002395126354













## 12 V ULTRA COMPACT IMPACT DRIVER



**BSS 12C** 

#### **Features**

- Ultra compact impact driver measuring only 163 mm
- Industrial metal gearbox and gears for superior durability
- Built in fuel gauge
- 1/4" Hex bit reception
- Ergonomic soft-grip design
- NEW 3 beam LED for total workplace illumination
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of

### **Specifications**

	BSS 12C-0	BSS 12C LI-202C	
Battery type	Li-ion	Li-ion	
Battery pack capacity (Ah)	-	2.0	
No. of batteries supplied	0	2	
Charger supplied	-	40 min	
Max. torque (Nm)	115	115	
No load speed (rpm)	0 - 2000	0 - 2000	
Impact rate (ipm)	0 - 3000	0 - 3000	
Tool reception	¹/₄″ Hex	¹/₄″ Hex	
Weight with battery pack (kg)	-	1.0	
Supplied in	-	Kitbox	
Article Number	4935446702	4935443965	
EAN Code	4002395136407	4002395135639	







PRO 12v









**Features** 

- L-shape SDS hammer for drilling and fixing into concrete up to 13 mm
- 0.9 Joule impact energy delivers high performance

**12 V CORDLESS HAMMER** 

- · Hammer action stop for rotary drilling in wood and metal
- Built in fuel gauge
- Metal gearbox for extended durability
- Safety clutch for user protection
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of battery and tool
- Supplied with a screwdriving bit adaptor

## **Specifications**

	BBH12-0	BBH 12 LI-202C	BBH 12 LI-402C	BBH 12 LI-401C
Battery type	Li-ion	Li-ion	Li-ion	Li-ion
Battery pack capacity (Ah)	-	2.0	4.0	4.0
No. of batteries supplied	0	2	2	1
Charger supplied	-	40 min	80 min	80 min
Max. drilling wood/ steel/ concrete (mm)	10/8/13	10/8/13	10/8/13	10/8/13
Blow energy (EPTA)(J)	0.9	0.9	0.9	0.9
No load speed (rpm)	0 - 800	0 - 800	0 - 800	0 - 800
Full load hammer action (bpm)	0 - 5350	0 - 5350	0 - 5350	0 - 5350
Weight with battery pack (kg)	-	1.6	1.8	1.8
Supplied in	-	Kitbox	Kitbox	Kitbox
Article Number	4935446699	4935443968	4935443991	4935443988
EAN Code	4002395136391	4002395135646	4002395135721	4002395135714

For further technical specifications, including noise and vibration data, please visit our website: www.aeg-powertools.com









PLUS







### 12V DRYWALL SCREWDRIVER



BTS12C

#### **Features**

- Light and small Drywall Screwdriver weights only 1,5 kg with an OAL of 254mm
- Really powerfull motor with 4000rpm
- A lock on Trigger to work more comfortable and safe runtime
- Fine adjustment nose cone for setting desired countersink levels in single screw applications +/-5 mm
- Quick release 1/4" Hex chuck allows for easy bit change
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability

BTS12C-0

Li-ion

3 Nm

0

4000 rpm

1/4" Hex

Gift box

4935459624

4058546027964

55 mm

BTS12C LI-202C

Li-ion

3,0 Ah

60 min

4000 rpm

1/4" Hex

55 mm

Toolbox

4935459626

4058546027988

3 Nm

Li-ion

2,0 Ah

40 min

4000 rpm

1/4" Hex

55 mm

Toolbox

4935459625

4058546027971

3 Nm

2

- Fuel gauge displays remaining charge
- Bright LED workspace illumination

**Specifications** 

Battery pack capacity (Ah)

Battery type

Charger supplied

Max. torque (Nm)

Tool reception

Supplied in

EAN Code

Article Number

No load speed (rpm)

No. of batteries supplied

Wood screws to (mm)

Belt clip to hang your tool quickly and easily



















# LASER DISTANCE METER

# • Point and shoot system - one person measuring with only one simple press of a button

- · Area, volume, height and width measurement
- Pythagoras 3 types

**Features** 

- Large and easy to read 3 line LCD graphical display with automatic white backlight
- Measuring pin for corner measurement
- Memory recall for last 10 measurements
- IP54 water & dust protection
- Extremely slim LDM
- Rubber overmold for a perfect handling
- Large rising buttons with intuitive positioning
- Belt clip makes it easy to carry and to hold in the pocket Addition/Subtraction function for adding measures of areas and volumes
- 3 points of measures: from the back, front or back end pin
- Indirect surface measurement



#### **Specifications**

	LMG 50
Battery type	2 x AAA
IP protection class	IP 54
Max. measurement range (m)	50
Pythagoras function	3 - point
Article Number	4935447680
EAN Code	4002395294275





# **FLASHLIGHTS / BATTERY LAMPS**



BLL 12 C

#### **Features**

- · Fantastic power to weight ratio
- Extra long runtime with Pro lithium Packs



### **Specifications**

	BLL 12C
Bulb type	LED
Battery Life (continuous use) (hrs)	9 (1.5ah)
Weight without battery pack (kg)	0.23
Article Number	4932352162
EAN Code	4002395368150





### **3.6 V INLINE SCREWDRIVER**

#### **Features**

- In-line or angled handle adjustment
- 10-stage torque selection plus drill stage
- Ergonomic, modern design
- 2-speed full metal gearbox
- 1/4" Hex bit reception



PRO Li THIUM

# **Specifications**

Battery type         Li-ion           Battery pack capacity (Ah)         1.5           No. of batteries supplied         2           Charger supplied         30 min	
No. of batteries supplied 2	
Charger supplied 30 min	
No load speed (rpm) 200/600	
Supplied in <b>Kitbox</b>	
Article Number 4935413165	
EAN Code 4002395197538	











### 12 V MULTI-TOOL



BMT12C

#### **Features**

- The 12V Multitool is a problem solver for the professional user
- 20.000 opm enables you to work with all kind of wood
- Speed dial 1-6 for perfect control of the speed
- Lock-on Switch for better comfort, no need for constant pushing



#### **Specifications**

	BMT12C-0	BMT12C LI-152B
Battery pack capacity (Ah)	-	1.5
Charger supplied	-	30 min
Standard equipment	1 x multi-tool head, accessories	1 x multi-tool head, accessories
Oscillation rate (opm)	20.000 opm	20.000 opm
No. of batteries supplied	0	2

Not compatible with Omni Pro attachments







# 12 V MULTI-TOOL





## **Features**

- Offers users the ultimate in ergonomics. The light weight, compact body is ideal for working in tight spaces.
- Tool free interchangeable heads to easily switch between a wide range of applications
- Large 2 finger switch with adjustable speed
- One handed use of applications

#### **Specifications**

OMNI 12C LI-152BKIT1	OMNI 12C LI-152BKIT2	OMNI 12C LI-152BKIT3
1.5	1.5	1.5
30 min	30 min	30 min
1 x multi-tool head, accessories	1x multi-tool head, 1x right angle drill head, accessories	1 x multi-tool head, 1 x jigsaw head, accessories
20,000	20,000	20,000
2	2	2
Tool bag	Tool bag	Tool bag
4935440765	4935440770	4935440780
4002395134809	4002395134816	4002395134830
	1.5 30 min 1 x multi-tool head, accessories 20,000 2 Tool bag 4935440765	1.5     1.5       30 min     30 min       1 x multi-tool head, accessories     1 x multi-tool head, 1 x right angle drill head, accessories       20,000     20,000       2     2       Tool bag     Tool bag       4935440765     4935440770







### **18 V MULTI-TOOL**



**OMNI 18C** 

#### **Features**

- Gives more power and more runtime than the 12 V power base, whilst keeping the advantage of cordless portability.
- Tool free interchangeable heads to easily switch between a wide range of applications
- Large 2-finger switch with adjustable speed
- One handed use of applicationsc

#### **Specifications**

	OMNI 18C 0-KIT1	OMNI 18C LI-152BKIT1
Battery pack capacity (Ah)	-	1.5
No. of batteries supplied	0	2
Oscillation rate (opm)	20,000	20,000
Charger supplied	-	30 min
Standard equipment	1 x multi-tool head, accessories	1 x multi-tool head, accessories
Supplied in	-	Tool bag
Article Number	4935440645	4935440644
EAN Code	4002395134649	4002395134632









# **AC MULTI-TOOL**

- Tool free interchangeable heads to easily switch between a wide range of applications
- Large 2 finger switch with adjustable speed
- One handed use of applications
- · LED for work place illumination
- Mains machine

**Features** 

#### **Specifications**

	OMNI 300 KIT1
Power input (W)	300
No. of batteries supplied	0
Oscillation rate (opm)	20,000
Oscillation angle left/ right (°)	2.0
Standard equipment	1 x multi-tool head, accessories
Supplied in	Tool bag
Article Number	4935431790
FAN Code	4002395194995







OMNI 300



# **KEYLESS OMNI MULTI TOOL HEAD**

OMNI - MTX

#### **Features**

- For applications: cutting, grout removal, rasping, sanding, scraping, polishing
- Keyless blade change system no more allen key needed for an easy and quick solution
- Full metal head construction for more durability
- Supplied with an adaptor which are fitting the most comon baldes on the market



#### **Specifications**

Name	OMNI - MTX
Oscillation angle left/ right (°)	2° / 2°
Oscillation rate (opm)	20.000
Article Number	4935446707
EAN Code	4002395136414

### **OMNI MULTI-TOOL HEAD**

**OMNI-MT** 

#### **Features**

• For applications: sawing, grout removal, rasping, shaving, sanding, scraping, filing, cutting, sharpening, polishing



# **Specifications**

	OMNI-MT
Oscillation angle left/ right (°)	1.5
Article Number	4935440700
EAN Code	4002395134717

### **ROTARY/DRYWALL CUTTER HEAD**

# OMNI - RT

#### **Features**

- The new OMNI-RT head is another problem solver head for the professional user, which will help them to make clean and precise curve plunge cut in drywall. Precise cut in non-ferrous metal, small and precise grinding & sanding jobs
- Up to 24.000 rpm clean cut in all materials
- Adjustable depth gauge for having a perfect control of the cut
- Multipurpose depth gauge: one end depth gauge, other End Key to change the bit. Easy and quick solution, always by the tool, no need to lose time looking for the key
- 3,2mm reception accept the most common accessories on the market. Can be used: cutting wheel for cutting metal. Grinding wheel for metal. Sanding wheels for wood. Drywall drill bit etc.

#### **Specifications**

Name	OMNI - RT
No load speed (rpm)	24.000
Collet capacity (mm)	3,175
Article Number	4935451311
EAN Code	4002395151295



### **OMNI JIGSAW HEAD**

#### **Features**

- For applications: cutting wood, laminate, thin metal and plastic
- Keyless blade change system
- Integrated Dust Blow
- Full metal gear case for mawimum durability
- 15mm Stroke Length for clean and fast cuts

OMNI-JS

#### **Specifications**

	OMNI-JS
Max. cutting capacity wood/ steel/ aluminium (mm)	40/6/10
Stroke length (mm)	15
No load stroke rate (spm)	0 - 3000
Article Number	4935440715
EAN Code	4002395134748

# OMNI-RH

# **Features**

- For applications: cutting metal & plastic pipe, wood (interior, garden & exterior), plasterboard
- 13mm Stroke length and up to 3.000 spm for fast cutting application

**OMNI RECIPROCATING SAW HEAD** 

Keyless Blade change for perfect ergonomics



### **Specifications**

Name	OMNI-RH
No load stroke rate (spm)	0 - 3000
Stroke length (mm)	13
Article Number	4935440725
EAN Code	4002395134762

## **OMNI RIGHT ANGLE DRILLING HEAD**

# OMNI-RAD

#### **Features**

- For applications: drilling wood, metal and plastic, fastening / screwdriving
- Single Sleeve 10mm Chuck

#### **Specifications**

OMNI-RAD
18/10
12
0 - 550
4
4935440705
4002395134724

Name	OMNI-RAD
Max. drilling wood/ steel (mm)	18/10
Max. torque (Nm)	12
No load speed (rpm)	0 - 550
Wood screws to (mm)	4
Article Number	4935440705
EAN Code	4002395134724

# **OMNI RATCHET HEAD**

# OMNI-IR

#### **Features**

- For applications: fastening / loosening bolts
- 3/8" reception
- 28Nm Torque for up to M12 capacity of nuts
- upt to 220rpm in forward / reverse

# **Specifications**

Name	OMNI-IR
No load speed (rpm)	0 - 220
Tool reception	³/8″ square
Max. torque (Nm)	28
Article Number	4935440720
EAN Code	4002395134755

### **OMNI IMPACT DRIVER HEAD**

# OMNI-IH

#### **Features**

- For applications: fastening / screwdriving, drilling wood & metal
- Quick Release system for easy change of bit

# **Specifications**


	OMNI-IH
Max. torque (Nm)	62
Impact rate (ipm)	0 - 3100
No load speed (rpm)	0 - 2000
Tool reception	¹/₄″ Hex
Article Number	4935440730
EAN Code	4002395134779

# HAMMER RANGE

HIGH PERFORMANCE POWER WHEN YOU NEED IT MOST

**AEG POWERTOOLS** offer an extensive selection of high performance rotary, combination, chipping and demolition hammers.

**AEG** 

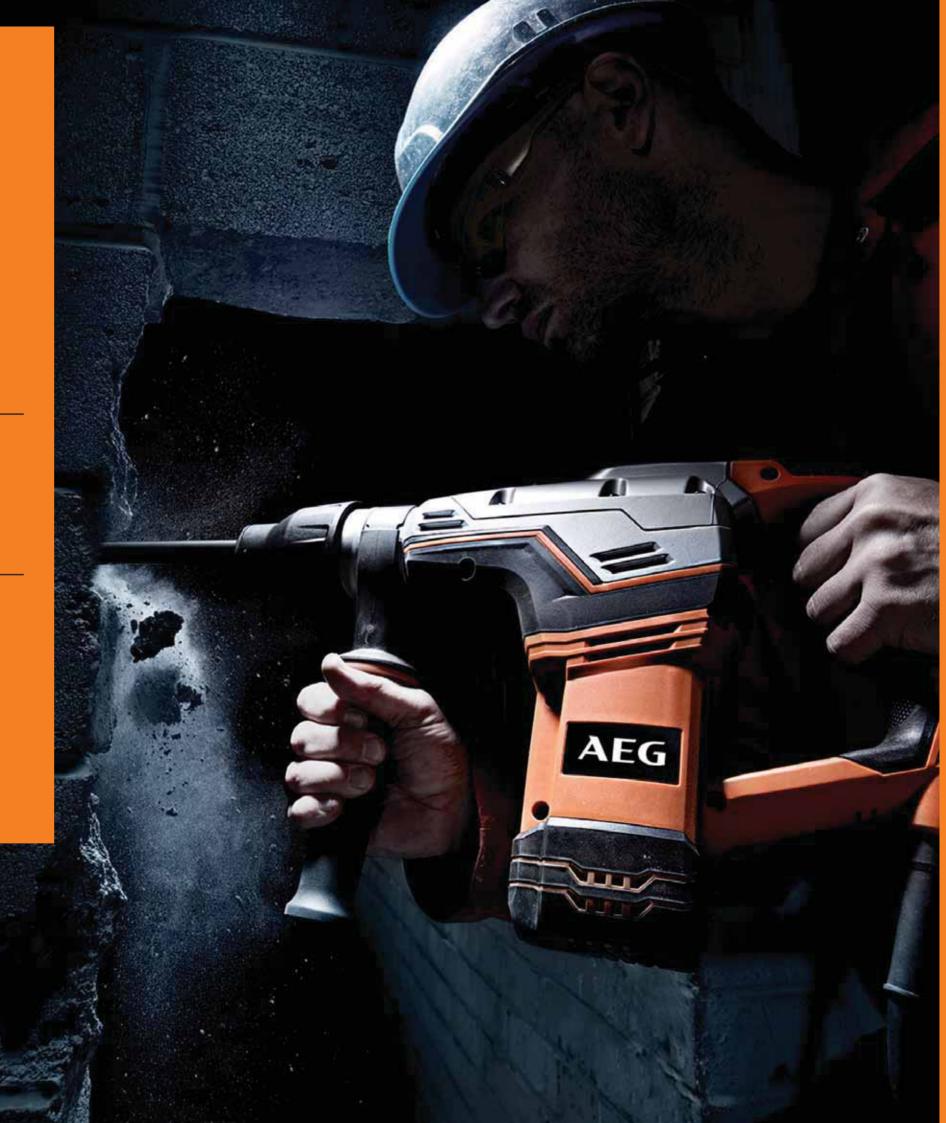

# **SDS-PLUS ROTARY HAMMER**

#### **Features**

- Powerful 800 watt motor
- 24 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- FIXTEC quick change chuck
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort
- Supplied with a side handle, FIXTEC adaptor and keyless chuck, metal depth gauge and a 4 m cable

# **Specifications**

	KH 24IXE
Power input (W)	800
No load speed (rpm)	0 - 1500
Blow energy (EPTA)(J)	2.4
Full load hammer action (bpm)	0 - 4500
Max. drilling wood/ steel/ concrete (mm)	30/ 13/ 24mm
FIXTEC	Yes
Weight (kg)	2.8
Tool reception	SDS-Plus
Supplied in	Kitbox
Article Number	4935451553
EAN Code	4002395144556











PLUS





# **ROTARY HAMMER**

- **Features**
- Powerful 800 watt motor • 24 mm drilling capacity in concrete
- Safety clutch for user protection
- Variable speed electronics for control Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort
- Supplied with a side handle, metal depth gauge and a 4 m cable

# **Specifications**

**Features** 

• Powerful 800 watt motor

• 26 mm drilling capacity in concrete

· Variable speed electronics for control

Safety clutch for user protection

Forward and Reverse mechanism

Soft-grip handle for comfort

Rotary stop for light chiselling applications

Hammer action stop for drilling in wood or metal

• Supplied with a side handle, meta depth gauge and a 4 m cable

	BH 24IE
Power input (W)	800
No load speed (rpm)	0 - 1500
Max. drilling wood/ steel/ concrete (mm)	30/ 13/ 24mm
Full load hammer action (bpm)	0 - 4500
Blow energy (EPTA)(J)	2.4
Tool reception	SDS-Plus
Weight (kg)	2.8
Supplied in	Kitbox
Article Number	4935451558
EAN Code	4002395145201





SDS

PLUS

₩<sub>U</sub>













# **SDS-PLUS COMBI HAMMER**

#### **Features**

- Powerful 800 watt motor
- 24 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Safety cluch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal

**SDS-PLUS ROTARY HAMMER** 

- Forward and Reverse mechanism
- Soft grip handle for comfort

# **Specifications**

KH 24IE
800
0 - 1500
2.4
0 - 4500
30/ 13/ 24mm
No
2.8
SDS-Plus
Kitbox
4935451555
4002395144570









SDS





# **Specifications**

	KH 26E	KH 26XE
Power input (W)	800	800
No load speed (rpm)	0 - 1500	0 - 1500
Blow energy (EPTA)(J)	2.5	2.5
Full load hammer action (bpm)	0 - 4500	0 - 4500
Max. drilling wood/ steel/ concrete (mm)	30/13/26	30/13/26
FIXTEC	No	Yes
Weight (kg)	2.6	2.8
Supplied in	Kitbox	Kitbox
Article Number	4935428180	4935428910
EAN Code	4002395194360	4002395194681









PLUS







### **SDS-PLUS COMBI HAMMER**

KH 28 Super XE

#### **Features**

- Powerful 1010 watt motor
- 28 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for drilling/chiselling in sensitive materials
- FIXTEC quick change tool system
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Soft-grip handle for comfort
- Electronic overload protection
- No load speed limitation
- Supplied with a side handle, FIXTEC adaptor and keyless chuck, metal depth gauge and a 4 m cable



### **Specifications**

	KH 28 Super XE	
Power input (W)	1010	
No load speed (rpm)	0 - 1500	
Blow energy (EPTA)(J)	2.8	
Full load hammer action (bpm)	0 - 5000	
Max. drilling wood/ steel/ concrete (mm)	30/13/28	
Weight (kg)	2.8	
Supplied in	Kitbox	
Article Number	4935428190	
EAN Code	4002395194377	



SDS

PLUS















# **SDS-PLUS COMBI HAMMER**

#### **Features**

- Powerful 750 watt motor
- 26 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for drilling/chiselling in sensitive materials
- FIXTEC quick change tool system
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Hammer action stop for drilling in wood or metal
- Supplied with a side handle, FIXTEC adaptor and keyless chuck, metal depth gauge and a 4 m cable



#### **Specifications**

	BH 26LXE	BH 26LE
Power input (W)	750	750
No load speed (rpm)	0 - 1400	0 - 1400
Blow energy (EPTA)(J)	2.7	2.7
Full load hammer action (bpm)	0 - 4500	0 - 4500
Max. drilling wood/ steel/ concrete (mm)	30/13/26	30/13/26
FIXTEC	Yes	No
Weight (kg)	3.1	2.9
Supplied in	Kitbox	Kitbox
Article Number	4935412000	4935412042
EAN Code	4002395197187	4002395197903



















# **SDS-PLUS COMBI HAMMER**

PN 3500X

#### **Features**

- Powerful 750 watt motor
- 30 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for controlled drilling in masonry
- FIXTEC quick change tool system
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Hammer action stop for drilling in wood or metal
- Supplied with a side handle, FIXTEC adaptor and keyed chuck, metal depth gauge and a 4 m cable



#### **Specifications**

	PN 3500X	PN 3500
Power input (W)	750	750
No load speed (rpm)	0 - 970	0 - 970
Blow energy (EPTA)(J)	3.4	3.4
Full load hammer action (bpm)	0 - 4200	0 - 4200
Max. drilling wood/ steel/ concrete (mm)	40/16/30	40/16/30
FIXTEC	Yes	No
Weight (kg)	3.6	3.4
Supplied in	Kitbox	Kitbox
Article Number	4935412210	4935412152
EAN Code	4002395198337	4002395198306













# **Features**

- Powerful 1100 watt motor
- 7.5 J EPTA blow energy
- 40 mm drilling capacity in concrete
- Rotary stop for chiselling applications
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling

**SDS-MAX COMBI HAMMER** 

• Supplied with a side handle, metal depth gauge, grease and a 4 m cable



	KH 5 G
Power input (W)	1100
No load speed (rpm)	0 - 450
Blow energy (EPTA)(J)	7.5
Full load hammer action (bpm)	0 - 3000
Max. drilling concrete/core bit/tunnel drill bit (mm)	40/105/65
Weight (kg)	6.4
Supplied in	Kitbox
Article Number	4935418160
EAN Code	4002395133062













#### **SDS-MAX COMBI HAMMER**

KH 5 E

#### **Features**

- Powerful 1200 watt motor
- 40 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for drilling/chiselling in sensitive materials
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- Service light provides in-time notice in the case of worn out brushes

**SDS-PLUS CHIPPING HAMMER** 

• Variolock (35 positions) for selecting the most appropriate chisel angle

AVS anti-vibration system significantly reduces vibration for more comfortable operation

- Power light indicates if electricity flows
- Supplied with a side handle, metal depth gauge, grease and a 6 m cable



# **Specifications**

**Features** 

Powerful 720 watt motor

Lock-on switch function

• 3.6 J impact energy for powerful chipping

Soft-grip for more comfortable handling

• Supplied with a side handle and a 4 m cable

Service hatches for easy changing of carbon brushes

	KH 5 E
Power input (W)	1200
No load speed (rpm)	0 - 300
Blow energy (EPTA)(J)	8.5
Full load hammer action (bpm)	0 - 2840
Max. drilling concrete/core bit/tunnel drill bit (mm)	40/90/65
Weight (kg)	6.6
Supplied in	Kitbox
Article Number	4935412326
EAN Code	4002395198603













# **SDS-MAX TRADESMANN CHIPPING HAMMER**

#### **Features**

- Best power to weight ratio in its class
- 2 mode SDS-Max chipping hammer
- Multi position chisel function gives 12 different positions to optimize working angle
- Robust magnesium gear housing for tough environments, exact seat fitting of gear components for better
- Low vibration construction enhances usage time per day
- Soft grip side handle
- Supplied with a side handle and a 4 m cable



# **Specifications**

	MH 5G	
Power input (W)	1100	
Blow energy (EPTA)(J)	7.5	
Full load hammer action (bpm)	0 - 3000	
Vibration chiseling (m/s²)	16.7	
Weight (kg)	5.9	
Supplied in	Kitbox	
Article Number	4935443170	
EAN Code	4002395135462	









MAX







### **SDS-MAX DEMOLITION HAMMER**

#### **Features**

- Powerful 1200 watt motor
- 8.5 J impact energy for effortless chipping
- Soft hammer mode reduces blow energy for chiselling in sensitive materials
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- · Soft start for precise start of chiselling
- Service light provides in-time notice in the case of worn out brushes
- Power light indicates if electricity flows
- Supplied with a D front handle, grease and a 6 m cable



# **Specifications**

	PM3
Power input (W)	720
Blow energy (EPTA)(J)	3.6
Full load hammer action (bpm)	0 - 3650
Weight (kg)	3.7
Supplied in	Kitbox
Article Number	4935412541
EAN Code	4002395199044





720









	MH 5 E
Power input (W)	1200
Blow energy (EPTA)(J)	8.5
Full load hammer action (bpm)	0 - 2840
Weight (kg)	6.2
Supplied in	Kitbox
Article Number	4935412361
EAN Code	4002395198795













# **SDS-MAX LARGE COMBI HAMMER**

#### **Features**

- Powerful 1700 watt motor
- 20 J impact energy for heavy demolition applications
- 50 mm drilling capacity into concrete
- Variable speed electronics for control
- No load speed limitation
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- Service light provides in-time notice in the case of worn out brushes
- Automatic cut out carbon brushes
- Soft-grip on handles for comfort
- Supplied with a D front handle, additional side handle, grease and a 6 m cable



#### **Specifications**

	PN 11 E
Power input (W)	1700
Blow energy (EPTA)(J)	20
Full load hammer action (bpm)	975 - 1950
Max. drilling concrete/core bit/tunnel drill bit (mm)	50/150/80
Weight (kg)	11.8
Supplied in	Kitbox
Article Number	4935412440
EAN Code	4002395198931













# **SDS-MAX LARGE DEMOLITION HAMMER**

#### **Features**

- Powerful 1600 watt motor
- 20 J impact energy for heavy demolition applications
- Variable speed electronics for control
- No load speed limitation
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Soft start for precise start of chiselling
- Service light provides in-time notice in the case of worn out brushes
- Automatic cut out carbon brushes
- Soft-grip on handles for comfort
- Supplied with a D front handle, grease and a 6 m cable



# **Specifications**

	PM 10 E
Power input (W)	1600
Blow energy (EPTA)(J)	20
Full load hammer action (bpm)	975 - 1950
Weight (kg)	11.0
Supplied in	Kitbox
Article Number	4935412418
EAN Code	4002395198832













# **SDS-MAX DEMOLITION HAMMER**

#### **Features**

- Powerful 1.500 watt motor
- 10.5 J impact energy for stronger chipping applications
- Soft hammer mode for reducing the blow energy by working on sensitive materials
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Soft start for precise start of chiseling
- Service lights provides in-time notice in case of worn out brushes
- Power light indicates if electricity flows



# **Specifications**

	MH 7E
	MH /E
Power input (W)	1500
Full load hammer action (bpm)	0 - 2700
Blow energy (EPTA)(J)	10.5
Vibration chiseling (m/s²)	11.1
Weight (kg)	7.3
Supplied in	Kitbox
Article Number	4935459422
EAN Code	4058546010836



SDS

MAX













For further technical specifications, including noise and vibration data, please visit our website: www.aeg-powertools.com

# DRILLING RANGE

MORE POWER JUST WHEN YOU NEED IT

**AEG POWERTOOLS** offer the power to drill deeper with their powerful range of percussion drills offering enhanced performance, reliability and durability for todays professional user.

**AEG** 



**74 DRILLING SYSTEMS DRILLING SYSTEMS** 75

#### **NEW ROTARY DRILL**

#### **Features**

- Compact and powerful 750 watt motor
- Speed dial and lock on trigger button for stationary drilling
- High drilling speed at 3.000 rpm
- IMB design for more durability
- Reinforced 2 sleeve 13 mm chuck
- Rubber overmold with micro texture for a perfect handling



#### **Specifications**

	BE 750 RE
Power input (W)	750
No load speed (rpm)	0 - 3000
Max. drilling wood/ steel (mm)	30/13
Chuck capacity (mm)	1.5 - 13
Max. torque (Nm)	27
Weight (kg)	1.9
Supplied in	Tool bag
Article Number	4935449160
EAN Code	4002395245116











# B4-1050

**Features** 

- Four-speed rotary drill for drilling up to 32 mm
- Breast plate and 57 mm gear neck for use in magnetic drill stands
- Standard morse taper 3 reception

**ROTARY DRILL** 

- Attachable handle with adjustable length
- Supplied with a breast plate, attachable handle and a 4 m cable



#### **Specifications**

	B4-1050
Power input (W)	1050
No load speed (rpm)	220/260/350/420
Max. drilling wood/ steel/ aluminium (mm)	52/32/52
Max. torque (Nm)	200
Tool reception	Morse taper 3
Weight (kg)	9.7
Supplied in	-
Article Number	4935415000
EAN Code	4002395193356













#### 1-SPEED PERCUSSION DRILL

#### SBE 705 RE

#### **Features**

- Powerful 705 watt motor
- Spoeed dial on the switch with lock on button
- Fast drilling speed at 2.800 rpm
- IMB design for more durability
- High quality 13mm metal chuck
- Rubber overmold with micro texture for a perfect handling



#### **Specifications**

	SBE 705 RE
Power input (W)	705
No load speed (rpm)	0 - 2800
Max. drilling wood/ steel/ masonry/ concrete (mm)	30/13/20/15
Max. torque (Nm)	25
Chuck capacity (mm)	13
Weight (kg)	1.9
Supplied in	Tool bag
Article Number	4935442830
EAN Code	4002395247851











#### **Features**

- Compact and powerful 750 watt motor
- Speed dial and lock on trigger button for stationary drilling

1-SPEED PERCUSSION DRILL

- High drilling speed at 3.000 rpm
- IMB design for more durability
- Reinforced 2 sleeve 13 mm chuck
- Rubber overmold with micro texture for a perfect handling




	SBE 750 RE	SBE 750 RZ
Power input (W)	750	750
Max. drilling concrete (mm)	16	16
Max. drilling masonry (mm)	20	20
Max. torque (Nm)	27	27
Chuck capacity (mm)	1.5 - 13	1.5 - 13
Chuck type	Keyless	Keyed
Weight (kg)	1.9	1.9
Supplied in	Kitbox	Tool bag
Article Number	4935442850	4935442840
EAN Code	4002395247875	4002395247868











**DRILLING SYSTEMS** 77 **76 DRILLING SYSTEMS** 

#### HIGH TORQUE PERCUSSION DRILL

SB2E 750 RX ST

#### **Features**

- Compact and powerful 750 watt high torque percussion drill
- 62 Nm torque delivers complete power
- IMB Integrated-Metal-Block technology for highest durability and stability
- 2-speed gearbox with synchromesh gear lever
- Variable speed control with speed dial, forward and reverse mechanism
- Easy access to carbon brushes via removal of soft-grip rubber
- Hammer action stop for rotary drilling
- 13 mm metal keyless chuck
- Supplied with a side handle, metal depth gauge and a 4 m cable



#### **Specifications**

	SB2E 750 RX ST	SB2E 750 R ST
Power input (W)	750	750
No load speed (rpm)	0 - 1200/0 - 3400	0 - 1200/0 - 3400
Max. drilling wood/ steel/ masonry/ concrete (mm)	40/13/22/20	40/13/22/20
Max. torque (Nm)	62	62
Chuck capacity (mm)	13	13
Weight (kg)	2.5	2.5
Supplied in	Kitbox	Kitbox
Article Number	4935412853	4935412839
EAN Code	4002395192779	4002395192700

















#### L-SHAPE PERCUSSION DRILL

#### **Features**

- Ultra compact powerful 750 watt percussion drill
- Superior ergonomic design
- Removable main handle
- IMB Integrated-Metal-Block technology for highest durability and stability
- Variable speed control with forward and reverse mechanism
- Patented FIXTEC system for quick and easy changing of accessories
- 2-speed planetary synchromesh gearbox
- Direct bit reception for reduced weight, reduced length and improved visibility
- Hammer action stop for rotary drilling
- 13 mm metal keyless chuck
- Supplied with a side handle, metal depth gauge and a 4 m cable

#### **Specifications**

	Ergomax
Power input (W)	750
No load speed (rpm)	0 - 1200/0 - 3400
Max. drilling wood/ steel/ masonry/ concrete (mm)	40/13/22/20
Max. torque (Nm)	58
Chuck capacity (mm)	13
Weight (kg)	2.6
Supplied in	Kitbox
Article Number	4935412396
EAN Code	4002395198870







**750** 

W











#### 2-SPEED PERCUSSION DRILL

SB2E 850 R

#### **Features**

- 850 Watt powerful 2 speed percussion drill
- 10 mm shorter than the previous version (235 mm OAL)
- Large switch with speed dial for stationary drilling or light mixing
- Large metal gear case for maximum durability
- 13 mm metal chuck
- Ergonomic soft-grip design for comfort



#### **Specifications**

	SB2E 850 R	SB2E 850 RZ
Power input (W)	850	850
No load speed (rpm)	0 - 1000/0 - 3000	0 - 1000/0 - 3000
Max. drilling wood/ steel/ masonry/ concrete (mm)	40/13/22/20	40/13/22/20
Max. torque (Nm)	56	56
Chuck capacity (mm)	13	13
Chuck type	Keyless	Keyed
Weight (kg)	2.7	2.7
Supplied in	Kitbox	Kitbox
Article Number	4935447360	4935447370
EAN Code	4002395294152	4002395294169









## SB2E 1100 RV

#### **Features**

- 1100 Watt powerful 2 speed percussion drill
- Anti vibration system for better comfort of use

2-SPEED PERCUSSION DRILL

- · Large metal gear case for maximum durability
- Ergonomic soft-grip design for comfort



#### **Specifications**

	SB2E 1100 RV	SB2E 1100 RVZ
Power input (W)	1100	1100
No load speed (rpm)	0 - 1000/0 - 3200	0 - 1000/0 - 3200
Max. drilling wood/ steel/ masonry/ concrete (mm)	40/13/24/22	40/13/24/22
Max. torque (Nm)	60	60
Chuck capacity (mm)	13	13
Chuck type	Keyless	Keyed
Weight (kg)	2.9	2.9
Supplied in	Kitbox	Kitbox
Article Number	4935447375	4935447385
EAN Code	4002395294176	4002395294183

For further technical specifications, including noise and vibration data, please visit our website: www.aeg-powertools.com














**DRILLING SYSTEMS** 79 **78 DRILLING SYSTEMS** 

#### **DRY DIAMOND DRILL**

DB 1500-2 XE

#### **Features**

- Powerful 1500 watt motor
- High performance 2-speed dry diamond drill
- Dual protection with interlinked mechanical and electronic clutches for safety
- Robust construction and full metal gearbox for durability
- 2-speed gear box
- Electronics with soft start for precision drilling and motor overload protection
- Soft hammer mode
- Supplied with a handle



#### **Specifications**

DB 1500-2XE
1500
0 - 1500/0 - 3000
M 18 x 2.5
162
4.2
Kitbox
4935412475
4002395198955





MFE 1500







# **WALL CHASER**

#### **Features**

- Powerful 1500 watt motor
- Electronics with thermal overload protection and soft start
- Variable and adjustable cutting depth for accurate results
- Variable cutting width for versatility
- Bayonet adaptor for dust extraction
- Supplied with a 4 m cable, special break out chisel, front handle, suction adaptor and a spanner



#### **Specifications**

	MFE 1500
Power input (W)	1500
Disc diameter (mm)	125
No load speed (rpm)	0 - 9500
Cutting width (mm)	8-26
Weight (kg)	4.1
Supplied in	Kitbox
Article Number	4935413605
EAN Code	4002395192809











#### **DRYWALL SCREWDRIVER**

#### **Features**

- Powerful 720 watt motor for increased productivity
- Compact high speed screwdriver for drywall applications
- Full metal gearbox for durability
- Easily adjustable depth-setting nosepiece for consistent fastener depth
- Forward and reverse mechanism
- Ergonomic design and soft-grip for comfortable handling
- 1/4" Hex bit reception
- Belt clip
- Supplied with a depth gauge, bit holder, PH 2 bit, belt clip and a 4 m cable

#### **Specifications**

	S 4000 E	
	3 4000 E	
Power input (W)	720	
No load speed (rpm)	0 - 4000	
Drywall screws [mm]	5	
Max. torque (Nm)	10	
Tool reception	¹/₄″ Hex	
Weight (kg)	1.4	
Supplied in	-	
Article Number	4935413215	
EAN Code	4002395197637	











S 2500 E

S 4000 E

#### **Features**

Powerful 720 watt motor for increased productivity

**SELF DRILLING SCREWDRIVER** 

- Compact self drilling screwdriver with high torque for self tapping screws
- Full metal gearbox for durability
- Easily adjustable depth-setting nosepiece for consistent fastener depth
- Forward and reverse mechanism
- Ergonomic design and soft grip for comfortable handling
- 1/4" Hex bit reception
- Supplied with a 2 depth gauge, bit holder, PH 2 bit, belt clip, 4 m cable and 3/8" & 5/16" Hex sockets

#### **Specifications**

	S 2500 E	
Power input (W)	720	
No load speed (rpm)	0 - 2500	
Self-tapping [mm]	6	
Wood screws to (mm)	6	
Max. torque (Nm)	14	
Tool reception	¹/₄″ Hex	
Weight (kg)	1.5	
Supplied in	-	
Article Number	4935413225	
EAN Code	4002395197651	

For further technical specifications, including noise and vibration data, please visit our website: www.aeg-powertools.com
















# METAL-WORKING RANGE

**POWER TO PERFORM** 

**AEG POWERTOOLS** offer an extensive range of grinders in a wide variety of power classes for the most diverse professional applications. These high performance tools are equipped with advanced features to ensure comfort and ease of use in the most challenging environments

**AEG** 

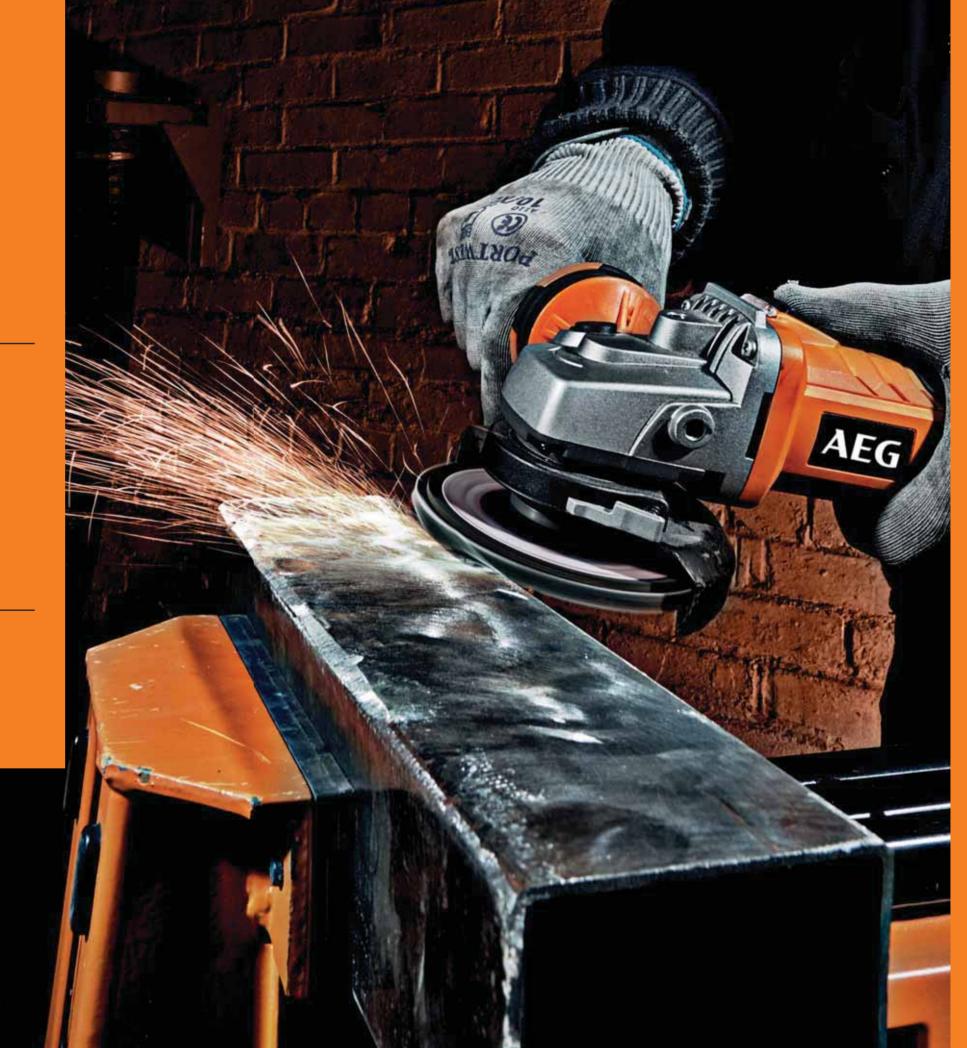

#### **SMALL ANGLE GRINDER**

#### **Features**

- New powerful 800 watt motor
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Metal gearbox for durability
- Directed air exhaust
- Gear head rotates at 90° intervals for added versatility
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
- Protected air inlets
- Spindle lock
- Supplied with an additional handle, flange, flange nut and spanner



#### **Specifications**

	WS8-115S
Power input (W)	800
No load speed (rpm)	12.000
Max. cutting depth (mm)	35
Disc diameter (mm)	115
Spindle size	M14
Weight (kg)	1.9
Supplied in	-
Article Number	4935451293
EAN Code	4002395150519











#### **SMALL ANGLE GRINDER**

#### **Features**

- New powerful 800 watt motor
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Metal gearbox for durability
- Directed air exhaust
- Gear head rotates at 90° intervals for added versatility
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
- Spindle lock
- Supplied with an additional handle, flange, flange nut and spanner



#### **Specifications**

	WS8-125SK	WS8-125S
Power input (W)	800	800
No load speed (rpm)	12.000	12.000
Max. cutting depth (mm)	40	40
Disc diameter (mm)	125	125
Spindle size	M14	M14
Weight (kg)	1,9	1,9
Supplied in	Kitbox	-
Article Number	4935451298	4935451296
EAN Code	4002395150564	4002395150540









#### **SMALL ANGLE GRINDER**

- New powerful 1000 watt motor with outstanding performance
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment

**Features** 

• Supplied with a AVS side handle, keyless safety guard, flange, flange nut and spanner



#### **Specifications**

	WS 10-115 S
Power input (W)	1000
No load speed (rpm)	11.500
Max. cutting depth (mm)	35
Disc diameter (mm)	115
Spindle size	M14
Weight (kg)	2,3
Supplied in	-
Article Number	4935451300
EAN Code	4002395150588









11000





#### **Features**

- New powerful 1000 watt motor with outstanding performance
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- · Machined metal gears for best durability

**SMALL ANGLE GRINDER** 

- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Spindle lock
- Supplied with a AVS side handle, keyless safety guard, flange, flange nut and spanner



	WS 10-125 S	WS 10-125 SK	
Power input (W)	1000	1000	
No load speed (rpm)	11.500	11.500	
Max. cutting depth (mm)	40	40	
Disc diameter (mm)	125	125	
Spindle size	M14	M14	
Weight (kg)	2,3	2.3	
Supplied in	-	Kitbox	
Article Number	4935451302	4935451303	
EAN Code	4002395151202	4002395151219	














#### **SMALL ANGLE GRINDER**

#### **Features**

- New powerful 1200 watt motor with outstanding performance
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Supplied with an AVS side handle, keyless safety guard, flange, flange nut and spanner



#### **Specifications**

WS 12-125 SK	WS 12-125 S	
1200	1200	
11.500	11.500	
40	40	
125	125	
M14	M14	
2,4	2,4	
Kitbox	-	
4935451307	4935451306	
4002395151257	4002395151240	
	1200 11.500 40 125 M14 2,4 Kitbox 4935451307	1200 1200 11.500 11.500 40 40 125 125 M14 M14 2,4 2,4 Kitbox - 4935451307 4935451306















#### **SMALL ANGLE GRINDER**

#### **Features**

- New powerful 1300 W motor with outstanding performance
- Line lock out (LLO)-function to prevent automatic start up after power breakdown
- Variable speed electronics for lower speed setting especially in finishing applications
- Constant speed for best performance and high torque, even in lower speed applications
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Supplied with an AVS side handle, keyless safety guard, flange, flange nut and spanner



11000 RPM

	WS13-125 SXE	WS13-125 SXEK
Power input (W)	1300	1300
No load speed (rpm)	2.800 - 11.500	2.800 - 11.500
Max. cutting depth (mm)	40	40
Disc diameter (mm)	125	125
Spindle size	M14	M14
Weight (kg)	2,4	2,4
Supplied in	-	Kitbox
Article Number	4935451309	4935451310
EAN Code	4002395151271	4002395151288













#### **LARGE ANGLE GRINDER**

#### **Features**

- New powerful 1520 watt motor
- DIGITRONIC with constant speed electronics, soft start, motor overload protection and no load speed
- FIXTEC patented nut for fast and easy disc changing
- Automatic cut-off, easy change carbon brushes
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
- Epoxy coating field and armature combat abrasive dust to increase tool lifetime
- New "snap-in" safety guard for keyless adjustment
- Spindle lock, with safety mechanism
- Large surface safety switch



#### **LARGE ANGLE GRINDER**

#### **Features**

- Powerful 2400 watt motor
- AVS: additional handle for more comfort handling and less strain on body joints
- Epoxy-coated field windings and armature prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection
- New "snap-in" safety guard for keyless adjustment
- · Convenient three-finger switch with soft start
- Soft start for smooth startup
- Supplied with a 4 m cable, wrench, flange, flange nut, anti-vibration additional handle, safety guard



#### **Specifications**

WS 15-125 SX
1520
11.000
35
125
M14
2.5
-
4935455100
4002395247264













#### **Specifications**

	WS 24-180 V
Power input (W)	2400
No load speed (rpm)	8,500
Max. cutting depth (mm)	44
Disc diameter (mm)	180
Spindle size	M14
Weight (kg)	5.3
Supplied in	-
Article Number	4935446490
EAN Code	4002395136285











#### LARGE ANGLE GRINDER

#### **Features**

- Powerful 2200 W motor with powder field coating for long life time and outstanding performance in all
- Extreme compact design with an overall short length of 485 mm and 5.1 kg for most comfortable handling
- Line lock out function to prevent automatic start up after power loss
- Soft start for smooth start up
- Burst resistant keyed safty guard
- External brush doors for easy access to the brushes for fast servicing
- Supplied with a cable, wrench, flange, flange nut, anti-vibration addition handle and a safety guard



#### **Specifications**

	WS 22-180 E	WS 22-180 DMS
Power input (W)	2200	2200
No load speed (rpm)	8,500	8,500
Max. cutting depth (mm)	45	45
Disc diameter (mm)	180	180
Spindle size	M14	M14
Deadman switch	No	Yes
Weight (kg)	5.1	5.1
Supplied in	-	-
Article Number	4935431690	4935431700
EAN Code	4002395194858	4002395194865











#### **LARGE ANGLE GRINDER**

WS 22-230

#### **Features**

- Powerful 2200 watt motor with powder field coating for long life time and outstanding performance in all
- Extreme compact design with an overall short length of 485 mm and 5.1 kg for most comfortable handling
- Line lock out function to prevent automatic startup after power loss
- Soft start for smooth start up
- Burst resistant keyed safety guard
- External brush doors for easy access to the brushes for fast servicing
- Supplied with a cable, wrench, flange, fange nut, anti-vibration additional handle and a safety guard



	WS 22-230 E	WS 22-230 DMS
Power input (W)	2200	2200
No load speed (rpm)	6,600	6,600
Max. cutting depth (mm)	68	68
Disc diameter (mm)	230	230
Spindle size	M14	M14
Deadman switch	No	Yes
Weight (kg)	5.2	5.2
Supplied in	-	-
Article Number	4935431720	4935431730
EAN Code	4002395194889	4002395194902









#### **LARGE ANGLE GRINDER**

#### **Features**

- Powerful 2400 watt motor
- AVS: additional handle for more comfort handling and less strain on body joints
- Epoxy-coated field windings and armature prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection
- New "snap-in" safety guard for keyless adjustment
- Convenient three-finger switch with soft start
- Soft start for smooth startup
- Supplied with a 4 m cable, wrench, flange, flange nut, anti-vibration handle and a safety guard



#### **Specifications**

	WS 24-230 V
Power input (W)	2400
No load speed (rpm)	6,600
Max. cutting depth (mm)	68
Disc diameter (mm)	230
Spindle size	M14
Weight (kg)	5.4
Supplied in	-
Article Number	4935446500
EAN Code	4002395136292











#### **LARGE ANGLE GRINDER**

WS 24-230 GEV

#### **Features**

- Powerful 2400 watt motor with powder field coating for long life time and outstanding performance in all applications
- Extreme compact design with an overall short length of 515 mm and 5.6 kg for most comfortable handling
- Line lock out function to prevent automatic start up after power loss
- Soft start for smooth start up
- Burst resistant quick release safety guard for easy adjustment
- AVS equipped motor housing and 2-positions Anti-vibration side handle for less vibrations
- 7 step rotating main handle and large soft grip area for most comfortable handling
- External brush doors for easy access to the brushes for fast servicing
- 4 m rubber cable
- Supplied with a wrench, flange, flange nut, anti-vibration additional handle and a safety guard



#### **Specifications**

	WS 24-230 GEV	WS 24-230 GV DMS
Power input (W)	2400	2400
No load speed (rpm)	0 - 6,600	0 - 6,600
Max. cutting depth (mm)	68	68
Disc diameter (mm)	230	230
Spindle size	M14	M14
Deadman switch	No	Yes
Weight (kg)	5.6	5.6
Supplied in	Kitbox	-
Article Number	4935431765	4935431775
FAN Code	4002395194964	4002395194971















#### **FIXTEC NUTS**











GS 500 E





#### **DIE GRINDER**

#### **Features**

- High speed, one handed die grinder
- Variable speed electronic
- · Automatic cut-off carbon brushes
- High rotation precision metal gearbox
- Weight only 1.3 kg
- Ergonomic switch
- Supplied with a key, 6 mm collect and a 4 m cable



	GS 500 E
Power input (W)	500
No load speed (rpm)	10,000 - 29,000
Collet capacity (mm)	6
Max. grinding wheel diameter (mm)	40
Max. grinding pin diameter (mm)	20
Weight (kg)	1.3
Supplied in	-
Article Number	4935412985
EAN Code	4002395192939











GSL 600 E **DIE GRINDER** 

#### **Features**

- Variable speed electronics
- Long spindle for easy access to awkward places
- Double bearing spindle seating for smooth rotation
- Automatic cut-off carbon brushes
- High rotation precision metal gearbox
- Weight only 1.9 kg
- Ergonomic switch
- Supplied with a key, 6 mm collect and a 4 m cable



# **Specifications**

	GSL 600 E
Power input (W)	600
No load speed (rpm)	10,000 - 29,000
Collet capacity (mm)	6
Max. grinding wheel diameter (mm)	40
Max. grinding pin diameter (mm)	20
Weight (kg)	1.9
Supplied in	-
Article Number	4935412965
EAN Code	4002395192946











# **POLISHER**

#### **Features**

- Variable speed electronics for various materials and finishes Special gearing for high spindle torque and ideal polishing speed
- Automatic cut-off carbon brushes
- Externally accessible brushes for easy replacement
- Spindle lock Large 3 finger switch
- Supplied with a 4 m cable, additional handle, cap and a backing pad



#### **Specifications**

	PE 150
Power input (W)	1200
No load speed (rpm)	900 - 2,500
Disc diameter (mm)	150
Spindle size	M14
Weight (kg)	2.1
Supplied in	-
Article Number	4935412266
EAN Code	4002395198443











#### **RIGHT ANGLE SANDER**

#### **Features**

- 1200 watt sander with full wave electronics
- Variable speed electronics for various materials and finishing
- High motor torque and optimum speed range for sanding, especially for fine surface work
- · Automatic cut-off carbon brushes
- Externally accessible brushes for easy replacement
- Spindle lock
- Large 3 finger switch
- Supplied with a 4 m cable, additional handle with guard, flange nut and a flexible backing pad



#### **Specifications**

	SE 12-180
Power input (W)	1200
No load speed (rpm)	1,800 - 4,800
Disc diameter (mm)	180
Spindle size	M14
Weight (kg)	2.5
Supplied in	-
Article Number	4935412279
EAN Code	4002395198481











#### **METAL CHOPSAW**

#### **Features**

- Powerful 2300 watt motor
- - 45°/0°/45° mitre capacity with quick release mitre clamp
- Spindle lock for easy wheel and accessory changing
- Deflector protects the user from sparks
- Oversize guard for added safety
- On board wrench storage
- Rubber feet for greater stability
- Replaceable carbon brushes
- Supplied with a 4 m cable, 355 mm cutting disc and a spanner

#### **Specifications**

	SMT 355
Power input (W)	2300
No load speed (rpm)	3800
Wheel size (mm)	355
Bore size (mm)	25.4
Weight (kg)	16.5
Supplied in	-
Article Number	4935411770
EAN Code	4002395129638

 $For further technical specifications, including \ noise \ and \ vibration \ data, please \ visit \ our \ website: www.aeg-powertools.com$ 













# WOOD-WOORKING RANGE

HIGH PERFORMANCE POWERFUL SOLUTIONS

**AEG POWERTOOLS** woodworking range offers a comprehensive selection of high performance machines to take on the most varied, professional applications. All of these tools offer ease of use, reliability, durability and features to ensure professional efficiency and best results.

**AEG** 



**WOODWORKING SYSTEMS** 95 94 WOODWORKING SYSTEMS

#### **66 MM CIRCULAR SAW**

#### **Features**

- Powerful 1600 watt motor
- 0-56 degree bevel capacity with 45 degree positive stop
- Die cast shoe and guard. More durable and stable
- Large action levers for easy operating
- Micro texture grip on front and back handle
- 4 m cable
- Dust port with DEK 26 connection to our AEG dust extractors



#### **Specifications**

	KS 66-2
Power input (W)	1600
No load speed (rpm)	0 - 5800
Mitre capacity (°)	0- 56
Blade diameter/Arbor size (mm)	190/30
Max. cutting depth 45/90° (mm)	47/64
Weight (kg)	4.8
Supplied in	Tool bag
Article Number	4935446675
EAN Code	4002395136339













- Powerful 1200 watt motor
- 0-50° bevel capacity with 45° positive stop

**55 MM CIRCULAR SAW** 

- Magnesium shoe and guards. More durable and stable
- Large action levers for easy operating
- Micro texture grip on front and back handle

**Features** 

Dust port with DEK 26 connection to our AEG dust extractors



#### **Specifications**

	KS 55-2
Power input (W)	1200
No load speed (rpm)	0 - 6,100
Mitre capacity (°)	0 - 50
Blade diameter/Arbor size (mm)	165/20
Max. cutting depth 45/90° (mm)	41/54
Weight (kg)	3.3
Supplied in	Tool bag
Article Number	4935446665
EAN Code	4002395136322











#### **TOPHANDLE JIGSAW**

#### **Features**

- New Tophandle Jigsaw with a new powerful 700 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 6-different speed settings for a better cutting control
- Better ergonomic design with integrated soft-grip
- Dust extraction port

**Specifications** 

Power input (W)

Mitre capacity (°) Stroke length (mm)

Pendulum settings

Weight (kg)

Supplied in

EAN Code

Article Number

No load stroke rate (spm)

- Dust blower keeps cut line clear for accuracy
- Keyless Adjustment of the Base plate for cutting close to edges and for precise Bevel cuts up to 45°

**STEP 100 X** 

1000 - 3200 45°

4935451000

4002395136513

700

20

2.3 Kitbox

• Supplied with a 4m cable, blade, anti-splitering guard and dust cap







STEP 100 X







# STEP 100

#### **TOPHANDLE JIGSAW**

#### **Features**

- New Tophandle Jigsaw with a new powerful 700 watt motor
- 6-different speed settings for a better cutting control

Max. cutting capacity wood/ steel/ aluminium (mm) 100/10/20

- Better ergonomic design with integrated soft-grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Supplied with a 4m cable, blade, anti-splitering guard and dust cap

# **Specifications**

	STEP 100
Power input (W)	700
No load stroke rate (spm)	1000 - 3200
Mitre capacity (°)	45°
Stroke length (mm)	20
Pendulum settings	4
Max. cutting capacity wood/ steel/ aluminium (mm)	100/10/20
Weight (kg)	2.2
Supplied in	-
Article Number	4935451001
EAN Code	4002395136520

For further technical specifications, including noise and vibration data, please visit our website: www.aeg-powertools.com















**WOODWORKING SYSTEMS** 97 96 WOODWORKING SYSTEMS

#### **TOPHANDLE JIGSAW**

#### **Features**

- New Tophandle Jigsaw with a new powerful 700 watt motor
- 6-different speed settings for a better cutting control
- Better ergonomic design with integrated soft-grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Supplied with a 4m cable, blade, anti-splitering guard and dust cap



#### **Specifications**

	STEP 80
Power input (W)	700
No load stroke rate (spm)	1000 - 3200
Mitre capacity (°)	45°
Stroke length (mm)	20
Pendulum settings	4
Max. cutting capacity wood/ steel/ aluminium (mm)	80/10/20
Weight (kg)	2.2
Article Number	4935451002
EAN Code	4002395136537













# PST 500 X

# **Features**

Powerful 440 watt motor

**PALM JIGSAW** 

- Patented FIXTEC system for changing saw blades in seconds
- LED light for cut line visibility
- Pendulum function
- Unique palm design for use in tight spaces and easy handling
- Dust blower keeps cut line clear for accuracy
- Supplied with a clear dust cap, splintering device, 1 saw blade and a 4 m cable



#### **Specifications**

	PST 500 X
Power input (W)	450
No load stroke rate (spm)	3700
Mitre capacity (°)	45°
Stroke length (mm)	15
Pendulum settings	1
Max. cutting capacity wood/ steel/ aluminium (mm)	40/6/10
Weight (kg)	2.3
Supplied in	Tool bag
Article Number	4935428260
EAN Code	4002395194315













#### **BODYGRIP JIGSAW**

#### **Features**

- Powerful 705 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4 stage pendulum adjustment
- · Variable speed electronics for control
- Ergonomic slimline bodygrip design with integrated soft grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Base plate can be moved backwards for cutting close to edges





#### **Specifications**

	ST 800 XE
Power input (W)	705
No load stroke rate (spm)	600 - 2700
Mitre capacity (°)	45°
Stroke length (mm)	26
Pendulum settings	4
Max. cutting capacity wood/ steel/ aluminium (mm)	110/10/25
Weight (kg)	2.3
Supplied in	Kitbox
Article Number	4935412950
EAN Code	4002395192892









ST 800 XE







STEP 1200 BX

#### **TOPHANDLE JIGSAW**

### **Features**

- Powerful 600 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4 stage pendulum adjustment
- Variable speed electronics for control
- Ergonomic top handle design with integrated soft-grip
- Sawdust blower keeps cutting line clear for accuracy
- Base plate can be moved backwards for sawing close to edges and for precise mitre cuts to 45°
- Supplied with a 4 m cable, blade, anti-splintering guard, sliding shoe, dust cap and a suction adaptor



	STEP 1200 BX
Power input (W)	600
No load stroke rate (spm)	500 - 3000
Mitre capacity (°)	45°
Stroke length (mm)	26
Pendulum settings	4
Max. cutting capacity wood/ steel/ aluminium (mm)	110/10/30
Weight (kg)	2.4
Supplied in	Kitbox
Article Number	4935412819
EAN Code	4002395192694
















98 **WOODWORKING SYSTEMS WOODWORKING SYSTEMS** 99

**STEP 1200 XE BODYGRIP JIGSAW** 

#### **Features**

- Powerful 730 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4 stage pendulum adjustment
- Variable speed selection for correct speed to match the material and blade
- Soft start prevents sudden kick back of machine on start up
- Integrated electronics allows constant speed under load
- Ergonomic and very slim body grip design with integrated soft-grip zone
- Dust extraction port
- Sawdust blower keeps cutting line clear for accuracy
- Adjustable dust extraction (front or back) over switch
- Base plate can be moved backwards for cutting close to edges and for precise mitre cuts to 45°
- Supplied with a 4 m cable, 1 saw blade, anti-splintering guard, dust cap and a suction adaptor



#### **Specifications**

	STEP 1200 XE
Power input (W)	730
No load stroke rate (spm)	500 - 3000
Mitre capacity (°)	45°
Stroke length (mm)	26
Pendulum settings	4
Max. cutting capacity wood/ steel/ aluminium (mm)	135/10/30
Weight (kg)	2.4
Supplied in	Kitbox
Article Number	4935412878
EAN Code	4002395192762













MF 1400 KE





#### **COMBO ROUTER**

#### **Features**

- 2 routers in one for maximum flexibility in all kinds of application Soft start to prevent sudden kickback
- Integrated electronics maintain constant speed under load
- Variable speed electronics for optimum control in a wide range of materials
- Large soft-grip handles for decreased vibration and greater comfort
- Flat motor housing with integrated rubber feet for convenient upside down bit change with spindle lock
- Premium collet and shaft design minimises run out
- Built in LED for unparalleled workplace illumination
- Through table depth adjustment for ultimate convenience
- Supplied with 5 guide bushes, 3 dust extraction adaptors, parallel guide, 2 collects (8/12 mm) 2 keys, oval base, round base and a chip shield



#### **Specifications**

	MF 1400 KE	
Power input (W)	1400	
Collet capacity (mm)	8 / 12	
Plunge capacity (mm)	64	
No load speed (rpm)	10.000 - 23.000	
Weight (kg)	5.7	
Supplied in	Tool bag	
Article Number	4935411850	
EAN Code	4002395193295	













#### **ROUTER**

**Features** 

- Powerful 2050 watt motor
- Electronic variable speed control
- Plunge depth set by calibrated dial
- · Micro depth adjustment
- 3-stage depth stop lock
- · Vertical depth adjustment scales
- Supplied with a 4 m cable, 6/8/12 mm collet, spanner, parallel guide, 4 guide bushes, router bit and dust



OF 2050 E

#### **Specifications**

	OF 2050 E
Power input (W)	2050
Collet capacity (mm)	6/ 8/ 12
Plunge capacity (mm)	66
No load speed (rpm)	10,000 - 20,000
Weight (kg)	6.2
Supplied in	-
Article Number	4935403665
EAN Code	4002395125869









#### **PLANER**

**Features** 

• Powerful 750 watt motor

- Left and right chip ejection for greater convenience
- Heel shoe protects the base, blade and work surface
- 0.2 mm stage depth adjustment setting for greater control and accuracy
- Depth scale indicator
- Supplied with 2 blades, edge guide, dust bag and a key



	PL 750
Power input (W)	750
No load speed (rpm)	17,000
Max. cutting depth (mm)	2
Cutting width (mm)	82
Rebate depth (mm)	12
Weight (kg)	2.9
Supplied in	-
Article Number	4935419140
EAN Code	4002395130481













100 WOODWORKING SYSTEMS **WOODWORKING SYSTEMS 101** 

#### **RECIPROCATING SAW**

#### **Features**

- Powerful 900 W motor, for fast cuts in various materials
- Pendulum function with 19 mm stroke length, for more powerful and faster cutting progress
- Speed regulation from 0 3500 spm, especially needed for heat-sensitive materials
- FIXTEC for fast and easy keyless blade change
- 24 % lighter than other saws, for better work control
- One hand blade insertion
- Soft grip handle, for better ergonomics
- Supplied with a 4 m cable and 2 blades



#### **Specifications**

	US 900 XE
Power input (W)	900
No load stroke rate (spm)	0 - 3500
Stroke length (mm)	19
Weight (kg)	2.9
Supplied in	Tool bag
Article Number	4935419610
EAN Code	4002395193806













## US 1300 XE

• Powerful 1300 watt motor

**Features** 

- FIXTEC blade clamp for fast and easy blade changes

**RECIPROCATING SAW** 



#### **PALM DELTA SANDER**

#### **Features**

- Extremely compact 260 watt sheet sander
- Ideal for working in confined spaces and over head
- Delta base for sanding in corners
- Hook & loop and large release tabs for convenient paper changing
- Magnesium base for more stability and less vibration
- Dust extraction with dust bag or absorption system
- Soft-grip on handle
- Supplied with a 4 m cable, 3 sheets (60, 80, 120 grit) sanding pad, delta base plate and dust bag



#### **Specifications**

	FDS 140
Power input (W)	260
No load speed (rpm)	14.000
Oscillation rate (opm)	20.000
Oscillation diameter (mm)	1.6
Sanding pad size (mm)	115 x 140
Weight (kg)	1.5
Supplied in	-
Article Number	4935416090
EAN Code	4002395129768



FDS 140











#### 1/2 SHEET SANDER

#### **Features**

- Powerful 500 watt motor
- Variable speed for optimum control
- · Convenient hook & loop paper fastening
- Dust extraction, with dustbag or absorption system
- Supplied with a 4 m cable, 3 sheets (80, 120, 240 grit) sanding pads, dust bag and a pommel handle



#### **Specifications**

	US 1300 XE
Power input (W)	1300
No load stroke rate (spm)	0 - 2800
Stroke length (mm)	30
Weight (kg)	3.8
Supplied in	Kitbox
Article Number	4935413235
EAN Code	4002395197675













FS 280
500
14.000 - 26.000
115 x 280
3.0
-
4935419280
4002395133116











**WOODWORKING SYSTEMS** 103 **102 WOODWORKING SYSTEMS** 

#### **RANDOM ORBIT SANDER**

#### **Features**

- Dual orbits for control of material removal
- Variable speed for optimum control
- Soft start and pad brake for a gauge free workpiece
- Through-body sealed slide switch for reliability and ease of use
- Convenient hook & loop paper fastening
- Dust extraction, with dust bag or absorption system
- Diecast construction for strength and durability
- Micro texture grip for perfect handling
- Supplied with a 4 m cable, 3 x 80 grit sanding pads, dust bag and a pommel handle



# **BELT SANDER**

#### **Features**

- Powerful 1010 watt motor
- Electronic speed for control and optimum results
- Clamping lever for easy, tool free changing of sanding belt
- Externally accessible brushes for easy replacement
- Control wheel for precise adjustment of sanding belt
- Compact design, ideal for sanding close to edges
- Die-cast construction for high strength and durability Dust extraction, with dust bag or absorption system
- Supplied with a 4 m cable, 1 x 80 grit sanding belt, dust bag and a pommel handle

HBS 1000 E

240 - 450

75 x 145

Kitbox

4935413205

4002395197613

75 5.1

1010 533



HBS 1000 E

#### **Specifications**

	EX 150 ES
Power input (W)	440
No load speed (rpm)	4000-10,000
Oscillation rate (opm)	8000-20,000
Oscillation diameter (mm)	3.2/ 6.4
Sanding pad size (mm)	150
Weight (kg)	2.8
Supplied in	-
Article Number	4935443290
EAN Code	4002395135479













# **BELT SANDER**

**Specifications** 

Power input (W)

Belt length (mm) Belt speed (rpm)

Belt width (mm)

Weight (kg)

Supplied in

EAN Code

Article Number

Sanding surface (mm)

# BBSE 1100

#### **Features**

- Powerful 1100 watt motor
- Extra-large sanding surface 100 x 140 mm
- Full-wave electronics with pre-selection of belt speed
- Control wheel for precise adjustment of belt alignment • Dust extraction, with dust bag or absorption system
- Supplied with a 4 m cable, 1 x 100 grit sanding belt and a dust bag



**©** 

	EX 150 ES
Power input (W)	440
No load speed (rpm)	4000-10,000
Oscillation rate (opm)	8000-20,000
Oscillation diameter (mm)	3.2/ 6.4
Sanding pad size (mm)	150
Weight (kg)	2.8
Supplied in	-
Article Number	4935443290
EAN Code	4002395135479











# **RANDOM ORBIT SANDER**

#### **Features**

- Ergonomic & compact 300 watt random orbit sander
- Ideal for working in confined spaces and over head · Variable speed for optimum control
- Pad brake control: pad brake for a gauge free workpiece
- Convenient hook & loop paper fastening
- Very efficient dust extraction over 8 holes in the base plate • Dust extraction, with dust bag or absorption system
- Soft-grip on handle
- Supplied with a 4 m cable, sheets (80, 120, 180 grit) sanding pads and a dust bag



#### **Specifications**

	EX 125 ES
Power input (W)	300
No load speed (rpm)	7000 - 12,000
Oscillation rate (opm)	14.000 - 24.000
Oscillation diameter (mm)	2,4
Sanding pad size (mm)	125
Weight (kg)	1.7
Supplied in	-
Article Number	4935416100
EAN Code	4002395129799













	BBSE 1100
Power input (W)	1100
Belt speed (rpm)	230 - 400
Belt length (mm)	560
Belt width (mm)	100
Sanding surface (mm)	100 x 140
Weight (kg)	5.0
Supplied in	-
Article Number	4935413530
EAN Code	4002395199037











104 WOODWORKING SYSTEMS **WOODWORKING SYSTEMS** 105

**HEAT GUN** 

#### **Features**

- 2 temperature adjustment modes 300° / 560°
- 253 420 l/min
- Reinforced fan for continuous use
- Extremely light product 0.85 kg
- Rubber overmold on back end for safe stationary use



#### **Specifications**

	HG 560 D
Power input (W)	1500
Air flow (I/min)	253 - 420
Temperature range (°C)	300 / 560
Weight (kg)	0.85
Supplied in	-
Article Number	4935441015
EAN Code	4002395134991







# **Features**

**HEAT GUN** 

- Electronic precise adjustment for temp from 90° up to 600°
- 345 434 l/min
- Reinforced fan for continuous use
- Extremely light product 0.9 kg
- Rubber overmold on back end for safe stationary use



#### **Specifications**

	HG 600 V	HG 600 VK
Power input (W)	2000	2000
Air flow (I/min)	345 - 434	345 - 434
Temperature range (°C)	90 - 600	90 - 600
Weight (kg)	0.9	0.9
Supplied in	-	Kitbox
Article Number	4935441025	4935441035
EAN Code	4002395135011	4002395135035







#### **TABLESAW**

- **Features**
- Powerful 1800 watt motor
- 4800 rpm for effortless accurate cutting
- 90 mm cutting depth (62 mm at 45°)
- Dual clamping parallel fence for high stability and accuracy
- Overload protection ensures durability
- Soft start
- Integrated table side extension up to 645 mm gives huge cutting capacity
- Collapsible stand with wheels and height adjustment for easy transportation and portability
- On board storage for all tools and spare blades
- Supplied with a 36 tooth TCT blade, rip fence, mitre gauge and fence, collapsible stand with wheels, push stick and a wrench



	TS 250 K
Power input (W)	1800
Blade diameter (mm)	254 x 30
No load speed (rpm)	4800
Mitre capacity (°)	45°
Max. cutting depth 45/90° (mm)	62/90
Weight (kg)	41.0
Supplied in	-
Article Number	4935419265
EAN Code	4002395133093









106 WOODWORKING SYSTEMS **WOODWORKING SYSTEMS** 107

#### **SLIDING COMPOUND MITRE SAW**

PS 305 DG

#### **Features**

- Powerful 1800 watt motor delivers 4400 rpm
- $\bullet$  Large cutting capacities include a massive maximum crosscut of 343 x 111 mm at 90  $^{\circ}$
- Double bevel 0-47° left or right
- Mitres 60° left or right, perfect for awkward mitres
- Rugged cast construction with huge table area
- Cam operated mitre lock for fast angle adjustment
- Supplied with a 60 tooth 305 mm blade

#### **Specifications**

	PS 305DG	
Power input (W)	1800	
Blade diameter (mm)	305	
No load speed (rpm)	4400	
Mitre capacity left (°)	60	
Mitre capacity right (°)	60	
Max. cutting depth (mm)	111	
Mitre saw capacity 90° (mm)	343	
Weight (kg)	31.0	
Supplied in	-	
Article Number	4935411570	
EAN Code	4002395126002	

















#### **SLIDE MITRE SAW**

#### **Features**

- Internal fan that removes 80% of the dust
- Cut line visibility Adjustable LED and laser
- Blade depth adjustment. Allows for trenching application
- Mitre lock with detent plate. Mitre: 50 left or right
- Powerful 2.000 watt motor delivers 5.000 RPM
- Supplied with a 48 tooth blade, clamp, hose, bucket cover and a dust bag

#### **Specifications**

	PS 254 L
Power input (W)	2000
Blade diameter (mm)	254
No load speed (rpm)	4500
Mitre capacity left (°)	50
Mitre capacity right (°)	50
Max. cutting depth (mm)	90
Mitre saw capacity 90° (mm)	305
Max. cutting capacity 0 mitre/ 90 bevel [mm]	90 x 305
Max. cutting capacity 45° mitre/ 90° bevel (mm)	90 x 215
Max. cutting capacity 0 mitre/ 45 bevel [mm]	50 x 305
Max. cutting capacity 45° mitre/ 45° bevel (mm)	50 x 215
Weight (kg)	19.5
Supplied in	-
Article Number	4935440670
EAN Code	4002395134687





















PSU 1000



#### • Internal fan that removes 80% of the dust

- Cut line visibility Adjustable LED and laser
- Blade depth adjustment: Allows for trenching applications
- Mitre lock with detent plate

**Features** 

- Mitre: 50° left or right
- Powerful 1500 watt motor delivers 5.000 RPM
- Supplied with a 48 tooth blade, clamp, hose, bucket cover and a dust bag

#### **Specifications**

	PS 216 L
Power input (W)	1500
Blade diameter (mm)	216
No load speed (rpm)	5000
Mitre capacity left (°)	50
Mitre capacity right (°)	50
Max. cutting depth (mm)	65
Mitre saw capacity 90° (mm)	65 x 305
Max. cutting capacity 0 mitre/ 90 bevel [mm]	65 x 305
Max. cutting capacity 45° mitre/ 90° bevel (mm)	65 x 215
Max. cutting capacity 0 mitre/ 45 bevel [mm]	36 x 305
Max. cutting capacity 45° mitre/ 45° bevel (mm)	36 x 215
Weight (kg)	16.5
Supplied in	-
Article Number	4935440650
EAN Code	4002395134656





For further technical specifications, including noise and vibration data, please visit our website: www.aeg-powertools.com













#### **UNIVERSAL MITRE SAW LEGSTAND**

# **Features**

- Extendable to 2,3 m
- Quick release brackets
- Adjustable leg Low weight 14 kg
- 180 Kg maximum load capacity



#### **Specifications**

	PSU1000
Extendable up to (mm)	2.3
Bearing force (kg)	180
Weight (kg)	14.0
Article Number	4935440850
EAN Code	4002395134892

For further technical specifications, including noise and vibration data, please visit our website: www.aeg-powertools.com

108 WOODWORKING SYSTEMS WOODWORKING SYSTEMS 109

#### DUST EXTRACTOR AP2-200 ELG

#### **Features**

- Clear Press filters cleaning system
- "L" industry dust class
- PET Filter, with fleece filter bag
- Wet and dry cleaning
- Wet overfill protection
- Click system easy to change accessories
- Fleece double wall filter bag and disposal bag



#### **Specifications**

	AP2-200 ELCP
Power input (W)	1000
Air volume (I/min)	3600
Max. vacuum (mbar)	210
Container capacity (ml)	20
Hose diameter (mm)	32
Hose length (m)	3.5
Weight (kg)	7.5
Article Number	4935447460
EAN Code	4002395294190



#### **DUST BUSTING POWER!!!**

Clear-press filter cleaning system explained:



#### **AP 300 ECP**

Description	Article Number	EAN Code
Filter cartridge.	4932352304	4002395369638
Filter bags.	4932352307	4002395369669
Extraction hose, anti static. 4 m long 36 mm diameter with tool adaptor.	4932352311	4002395369706
Extraction hose. 3.5 m long 32 mm diameter with tool adaptor.	4932352312	4002395369713

#### **AP2-200 ELCP**

Description	Article Number	EAN Code
Filter cartridge.	4932352303	4002395369621
Filter bags: 5 pcs.	4932352306	4002395369652
Extraction hose. 3.5 m long 32 mm diameter with tool adaptor.	4932352312	4002395369713

# ACCESSORIES RANGE

# WHERE POWER MEETS PERFORMANCE

**AEG POWERTOOLS** offer a complete range of accessories for the professional user. From drill bits to saw blades all these accessories offer reliability ease of use and performance.

**AEG** 



112 ACCESSORIES **ACCESSORIES** 113

#### **BATTERIES**











	L1890RHD	L1850R	L1840R	L1830R	L1820R	L1815G
Battery type	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
Battery pack capacity (Ah)	9.0	5.0	4.0	3.0	2.0	1.5
Charger compatibility	AL 1218G,AL 9618	AL 1218G,AL 9618	AL 1218G,AL 9618	AL 9618,BL 1218	AL 9618,BL 1218	AL 9618,BL 1218
Article Number	4932464231	4932451630	4932430170	4932352655	4932430169	4932459425
EAN Code	4058546221768	4002395140978	4002395378319	4002395373130	4002395378302	4058546010867











	L1430R GEN II	L1420R	L1415R	L1420 G3	L1415 G3
Battery type	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
Battery pack capacity (Ah)	3.0	2.0	1.5	2.0	1.5
Charger compatibility	AL 9618,BL 1218,AL 1218G	AL 9618,BL 1218,AL 1218G	AL 9618,BL 1218,AL 1218G	AL 1214 G3	AL 1214 G3
Article Number	4932352657	4932430167	4932352656	4932451097	4932451096
EAN Code	4002395373154	4002395378289	4002395373147	4002395811236	4002395811229











	L1260	L1240	L1230	L1220	L1215
Battery type	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
Battery pack capacity (Ah)	6.0	4.0	3.0	2.0	1.5
Charger compatibility	LL 1230				
Article Number	4932459180	4932430166	4932352824	4932430165	4932352658
EAN Code	4002395288557	4002395378272	4002395288557	4002395378265	4002395373161









	L1215 G3	L1220 G3	L1215R
Battery type	Li-ion	Li-ion	Li-ion
Battery pack capacity (Ah)	1.5	2.0	1.5
Charger compatibility	-	-	AL 9618,BL 1218
Article Number	4932430365	4932451094	4932451095
EAN Code	4002395380268	4002395811205	4002395811212



SL 3.6	
Li-ion	
1.5	
LA 036	
4932352969	
4002395376278	

#### **CHARGERS**

	Battery type	Charging range	Charging time	Article Number	EAN Code
AL1214G	Li-ion, NiCd, NiMH	12 - 14.4 V	60 min	4932352481	4002395371402
AL1218G	Li-ion, NiCd, NiMH	12 - 18 V	60 min	4932352528	4002395371860
BL 1218 GEN II	Li-ion, NiCd, NiMH	12 - 18 V	30 min	4932352659	4002395373178
AL1214 G3	Li-ion	12 - 14 v	30 min	4932451098	4002395811243
LL1230	Li-ion	12 V	30 min	4932352096	4002395367498
LA 036	Li-ion, NiCd, NiMH	3.6 V	30 min	4932352097	4002395367504

#### **POWER SET SDS-PLUS DRILL BITS**

- High quality 2 cutter carbide top with 130° tip angle
- The carbide tip is set deeper into the head for a more precise fit and better durability
- 2 flute geometry for rapid material removal
- Surface treated flute eliminates binging for faster drilling and high abrasion resistance
- High quality robust and compact power set with secure lock
- Made in Germany

	Article Number	EAN Code
Counter display (12 sets) SDS-Plus	4932352315	4002395369744
Single Power Set SDS-Plus Drill Bits (8pcs) with Ø 5/6/8 x 110 mm and Ø 6 (2pcs)/8/10/12 x 160 mm	4932352236	4002395368952



#### **POWER SET STONE DRILL BITS**

- Extra sharp diamond ground carbide tip with 130 degree angle
- Polished silver and black finish eliminates binding for faster cutting and material removal
- Made from special alloy steel for best precision and robustness
- High quality robust and compact power set with secure lock

	Article Number	EAN Code
Counter display (6 sets) Stone	4932352238	4002395368976
Single Power Set Stone Drill Bits (10pcs)		
Contents:	4932352239	4002395368983
Ø 4/5/5.5/6 (2pcs)/7/8 (2pcs)/9/10 mm		



#### POWER SET HSS-R (DIN 338) METAL DRILL BITS

- HSS-Rollforged metal drill bits manufactured according to DIN 338
- Oxide coating for improved swarf removal
- Normal point cutting tip with 118 degree angle
- Standard type N flute design
- High quality robust and compact power set with secure lock

	Article Number	EAN Code
Counter display (6 x sets) HSS-R	4932352240	4002395368990
Single Power Set HSS-R Drill Bits (19pcs)  Contents: Ø 2 x 49 mm / Ø 2.5 (2pcs) x 57 mm/ Ø 3 (2pcs) x 61 mm/ Ø 3.5 (2pcs) x 70 mm/ Ø 4 (2pcs) x 75 mm/ Ø 4.5 (2pcs) x 80 mm/ Ø 5 (2pcs) x 86 mm/ Ø 6 (2pcs) x 93 mm/ Ø 7 x 109 mm/ Ø 8 x 117 mm/ Ø 9 x 125 mm/ Ø 10 x 133 mm	4932352241	4002395369003



#### **POWER SET HSS-G (DIN 338) METAL DRILL BITS**

- Fully ground drill bits according to DIN 338
- Standard tip for cutting geometry with 118° angle
- Standard type N flute design for faster chip removal and faster cutting
- High quality robust and compact powere set with secure lock

	Article Number	EAN Code
Counter display (6 x sets) HSS-G	4932352242	4002395369010
Single Power Set HSS-G Drill Bits (19pcs)  Contents: Ø 2 x 49 mm / Ø 2.5 (2pcs) x 57 mm/ Ø 3 (2pcs) x 61 mm/ Ø 3.5 (2pcs) x 70 mm/ Ø 4 (2pcs) x 75 mm/ Ø 4.5 (2pcs) x 80 mm/ Ø 5 (2pcs) x 86 mm/ Ø 6 (2pcs) x 93 mm/ Ø 7 x 109 mm/ Ø 8 x 117 mm/ Ø 9 x 125 mm/ Ø 10 x 133 mm	4932352243	4002395369027



114 ACCESSORIES ACCESSORIES 115

#### **POWER SET HSS-G TIN DRILL BITS**

- Metal drill bits ground from high speed steel according to DIN 338
- Normal point cutting tip with 118° angle
- Standard type N flute design
- Titanium nitride coating increases cutting speed by 50% and lifetime by 300%
- High quality robust and compact power set with secure lock

	Article Number	EAN Code
Counter display (6 x sets) HSS-G TiN	4932352244	4002395369034
Single Power Set HSS-G TiN Drill Bits (19pcs)  Contents:  Ø 2 x 49 mm / Ø 2.5 (2pcs) x 57 mm/ Ø 3 (2pcs) x 61 mm/ Ø 3.5 (2pcs) x 70 mm/  Ø 4 (2pcs) x 75 mm/ Ø 4.5 (2pcs) x 80 mm/ Ø 5 (2pcs) x 86 mm/ Ø 6 (2pcs) x 93 mm/  Ø 7 x 109 mm/ Ø 8 x 117 mm/ Ø 9 x 125 mm/ Ø 10 x 133 mm	4932352245	4002395369041



#### POWER SET LIP & SPUR WOOD DRILL BITS

- Manufactured from chrome vanadium steel according to DIN 7487 E
- Center point guarantees precise positioning
- Sharpened shoulders provide for clean holes avoiding splintering
- High quality robust and compact power set with secure lock

	Article Number	EAN Code
Counter display (6x sets) Lip and Spur Wood	4932352246	4002395369058
Single Power Set Lip & Spur Wood Drills Bits (8 pcs)		
Contents: Ø 3 x 60 mm / Ø 4 x 75 mm/ Ø 5 x 85 mm/ Ø 6 x 97 mm/ Ø 7 x 104 mm/ Ø 8 x 117 mm/ Ø 9 x 120 mm/ Ø 10 x 133 mm	4932352247	4002395369065



#### POWER SET HSS-G (DIN 338) METAL DRILL BITS & SCREWDRIVING BITS

- Metal drill bits ground from high speed steel according to DIN 338
- Normal point cutting tip with 118° angle
- Standard type N flute design
- Screwdriving bits are milled from S2 steel
- High quality robust and compact power set with secure lock

	Article Number	EAN Code
Counter Display (6 x sets) HSS-G & Screwdriving Bits	4932352248	4002395369072
Single Power Set HSS-G & Screwdriving Bits (35pcs)  Contents:  Ø 2/ 2.5/ 3/ 3.2/ 3.5/ 4/ 4.5/ 6/ 8/ 10mm  25mm length: PH1 (2pcs)/ PH2 (2pcs)/ PH3 (2pcs)/ PZ1 (2pcs)/ PZ2 (2pcs)/ PZ3 (2pcs)/ TX10 (2pcs)/ TX15 (2pcs)/ TX20 (2pcs)/ TX25 (2pcs)/ TX30/ TX40  50mm length: PH2/ PZ2  ½" Hex magnetic bit holder	4932352249	4002395369089



#### POWER SET JIGSAW BLADES FOR WOOD & METAL

- Wood applications:
- T144D Fast cutting
- T101B Very clean, splinter free cutting
- Metal applicatio
- T118A Cutting of thin sheet material Ø 1.5-4 mm

Power Set 50pcs - jigsaw blades for wood and metal

10 x T 144 D/ 10 x T 101 B/ 15 x T 118 A/ 15 x T 188 B

• T118B - cutting of thicker material 3-6 mm

Counter display (6 x sets) Jigsaw Blades

High quality robust and compact power set with secure lock



Article Number

4932352252

4932352253



#### POWER SET SCREWDRIVING BITS

COLDfire\* is a special hardening treatment for making metal stronger, tougher and more durable. This
cryogenic process is a one-time permanent treatment affecting the entire screwdriving bit and it is not just
a surface coating. The cryogenic process consists of two steps, firstly the bit is hardened by heating it up
to 870° and then freezing the bit down to -148° using a dry nitrogen atmosphere. The result of this process
is a bit with exceptional durability



• + 45% longer life - over the lifetime of a bit one can expect to drive 45% more screws

	Article Number	EAN Code
Counter display (6x sets) Screwdriving Bits	4932352254	4002395369133
Single Power Set Screwdriving Bits (40pcs)		
Contents: 25mm length: PH1 / PH2 (2pcs)/ PH3 / PZ1 (2pcs)/ PZ2 (2pcs)/ PZ3 (2pcs)/ TX6/ TX7 / TX 8/ TX9/ TX10 (2pcs)/ TX15 (2pcs)/ TX20 (2pcs)/ TX25 (2pcs)/ TX30/ TX40/ Hex 3/ Hex 5/ Hex 5/ Hex 6/ SL 0.6 x 4.5/ SL 0.8 x 5.5/ SL 1.0 x 5.5/ SL 1.2 x 6.5 SOmm length: PH1/ PH2/ PZ1/ PZ2/ TX10/ TX15/ TX20 // "Hex magnetic bit holder	4932352255	4002395369140





#### PROFI-BOX HSS-R (DIN 338) METAL DRILL BITS

- HSS-Rollforged metal drill bits manufactured according to DIN 338
- 118° cutting tip angle
- Oxide coating for improved swarf removal
- Robust metal box

	Article Number	EAN Code
Counter display (10 x sets) HSS-R	4932352460	4002395371198
Single Profi-Box HSS-R Drill Bits (19pcs)		
Contents: Ø 1-10 mm in 0.5 mm incrementals	4932352459	4002395371181



#### **MAXI-MIX DRILL BITS**


- Contains a mixed assortment of drill bits for drilling wood, metal and masonry/stone (18 pieces in total)
- Robust metal box

	Article Number	EAN Code
Counter display (10 x sets) Maxi-Mix Drill Bits	4932352464	4002395371235
Single Maxi-Mix Drill Bits (18pcs)		
Contents: Stone drill bits: Ø 3/4/5/6/8/10 mm HSS-R drill bits: Ø 3/4/5/6/8/10 mm Wood drill bits: Ø 3/4/5/6/8/10 mm	4932352463	4002395371228



#### WB1 - SCREWDRIVER ANGLE ATTACHMENT WITH 10 SCREWDRIVING BITS

- Contents: WB1 and crewdriving bits 25 mm PH1/ PH2/ PZ1/ PZ2 (2pcs)/ PZ3/ TX15/ TX20/ Hex 4/ Hex 5
- Being only 30 mm high it is ideally suited to working in confined and limited spaces
- ullet Fits to all machines. The 1/4" Hex shank fits directly into the chuck preventing slippage
- Magnetic ¼" Hex reception. Accepts ¼" Hex screwdriving bits
- Adjustable to working situation. 360° variable thumb lever for extra grip
   Industrial quality up to 11 Nm torque and 400 min-1
- Tough gears made of special hardened steel



Counter display (10 x WB1 Sets)



Single WB1



Screwdriver angle attachment with 10 screwdriving bits



Article Number	EAN Code
4932430174	4002395378357
4932430173	4002395378340



116 ACCESSORIES **ACCESSORIES** 117

#### **MAXI-BIT SCREWDRIVING SET**

	Article Number	EAN Code
Counter display (20 x sets) & Screwdriving Bits	4932399494	4002395361144
Single Maxi-Bit Set Screwdriving Bits (10pcs)		
Contents: SL 0.6 x 4.5/ SL 0.8 x 5.5/ SL 1.5 x 6.5/ PH1/ PH2/ PH3/ PZ1/ PZ2/ PZ3 $1/4$ " Hex magnetic bit holder	4932399493	4002395361151



#### **PROFI-BIT SCREWDRIVING SET**

	Article Number	EAN Code
Counter Display (17 x Sets) Screwdriving Bits	4932399496	4002395361168
Single Profi-Bit Set Screwdriving Bits (17pcs)  Contents: SL 0.8 x 5.5/ SL 1.2 x 6.5/ PH1/ PH2 (2pcs)/ PH3/ PZ1/ PZ2 (2pcs)/ PZ3/ TX10/ TX15/ TX20/ TX25/ TX30/ TX40  ½" Hex magnetic bit holder	4932399495	4002395361175



#### **FIXTEC NUTS**

- FIXTEC: Disc changing in seconds, no extra tools required
- 12 seconds from removing the worn disc to fixing a new disc
- Only 8 mm thin, enabling more surface of sic on the material
- Compatible to all manufactures angle grinders up to 150 mm with standard M14 spindle thread
- With integrated keyholes, for removal of the nut with a standard pin spanner in the event of the nut


















	Article Number	EAN Code
Counter display ( 12 x FIXTEC Nut)	4932358936	4002395326693
Single FIXTEC Nut	4932358225	4002395325528

#### SDS-PLUS DRILL BITS - 2 CUT / 10 PIECE POWER PACKS

- High quality 2 cutter carbide tip with 130 degree tip angle
- The carbide tip is set deeper into the head for a more precise fit and better durability
- 2 flute geometry for rapid material removal
- Surface treated eliminates binding for faster drilling and high abrasion resistance


Ø (mm)	Total length A (mm)	Working length B (mm)	Quantity	Article Number	EAN Code
5	110	50	10	4932352256	4002395369157
5.5	110	50	10	4932352257	4002395369164
6	110	50	10	4932352258	4002395369171
6	160	100	10	4932352259	4002395369188
7	160	100	10	4932352260	4002395369195
8	110	50	10	4932352261	4002395369201
8	160	100	10	4932352262	4002395369218
8	210	150	10	4932352263	4002395369225
10	160	100	10	4932352264	4002395369232
10	210	150	10	4932352265	4002395369249
10	260	200	10	4932352266	4002395369256
12	160	100	10	4932352267	4002395369263
12	210	150	10	4932352268	4002395369270
-	Plus Drill Bits (8pcs) and Ø 6 (2pcs)/8/10/12 x 160	mm		4932352236	4002395368952
DS-plus Starter Set	and 20 0 (2pc3//0/10/12 X 100	11111			
vith Ø 6/8/10 x 160mm	, point chisel and flat chisel			4932352653	4002395373116






#### **SDS MAX DRILLS - 2 CUT**

Total length A (mm)	Working length B (mm)	Quantity	Article Number	EAN Code
540	400	1	4932352687	4002395373451
540	400	1	4932352688	4002395373468
520	400	1	4932352689	4002395373475
520	400	1	4932352690	4002395373482
520	400	1	4932352691	4002395373499
570	450	1	4932352692	4002395373505
570	450	1	4932352693	4002395373512
570	450	1	4932352694	4002395373529
	540 540 520 520 520 570 570	540     400       540     400       520     400       520     400       520     400       570     450       570     450	540     400     1       540     400     1       520     400     1       520     400     1       520     400     1       570     450     1       570     450     1	540     400     1     4932352687       540     400     1     4932352688       520     400     1     4932352689       520     400     1     4932352690       520     400     1     4932352691       570     450     1     4932352692       570     450     1     4932352693




#### **SDS-PLUS CHISELS**

Description	Length (mm)	Width (mm)	Quantity	Article Number	EAN Code
Point chisel	200	-	1	4932352269	4002395369287
Flat chisel	200	20	1	4932352270	4002395369294
Wide chisel	200	35	1	4932352271	4002395369300
Set of 3 SDS-plus	chisels			4932352272	4002395369317
with 1 pointed, 1 fla	at, 1 wide chisel				



#### **SDS MAX CHISELS**

Description	Length (mm)	Width (mm)	Quantity	Article Number	EAN Code
Point chisel	400	-	1	4932352685	4002395373437
Flat chisel	400	25	1	4932352686	4002395373444



#### **ROUTER BIT SET**

Description	Quantity	Article Number	EAN Code
8 mm shank	12	4932354236	4002395320639



118 ACCESSORIES 119

#### **MULTIMIX SET 75 PCS - DRILLING AND SCREWDRIVING SET**

	Article Number	EAN Code
Contents: Scewdriving bits 25 mm length 1x PH 0/1x PH 1/3 x PH 2/1x PH 3/1 x PZ 0/1 xPZ 1/3 x PZ 2/1 x PZ 3/ 1x SQ 1/1 x SQ 2/1 x SQ 3/1 x TX 10/1 x TX 15/1 x TX 20/1 x TX 25/1 x TX 30/ 1x TX 40/1 x Hex 4/1 x Hex 5/1 x Hex 6/1 x SL 3/1 x SL 4/1 x SL 5/1 x SL 5/1 x SL 6/ 1x SL7/1 x SL 8 %* Hex magnetic bit holder		
Screwdriving bits 50 mm length 1 x PH 2/1 x PZ 2/1 x SL 4/1 x SL 6/1 x SL8		
Nut drivers 1 x 5 mm/1 x 6 mm/1 x 7 mm/1 x 8 mm/1 x 10 mm/1 x 12 mm	4932352670	4002395373284
Metal drill bits HSS-R DIN 338 2 x 1 mm/ 1 x 1.5 mm/ 1 x 2.5 mm/ 1 x 3.5 mm/ 1 x 3.5 mm/ 1 x 4 mm		
Lip & Spur wood drill bits $3 \times 3 \text{ mm}/ 3 \times 4 \text{ mm}/ 2 \times 5 \text{ mm}/ 1 \times 6 \text{ mm}/ 1 \times 7 \text{ mm}/ 1 \times 8 \text{ mm}/ 1 \times 10 \text{ mm}/$		
Countersink with $\frac{1}{4}$ Hex reception 45°		
Masonry drill bits 1 x 4 mm/1 x 5.5 mm/1 x 5.5 mm/3 x 6 mm/1 x 6.5 mm/2 x 7 mm/1 x 8 mm/1 x 10 mm/1 x 12 mm		



#### **DRILL AND DRIVE 50PCS SET**

	Article Number	EAN Code
HSS-Ground Metal Drill Bits 1 x 2 mm/1 x 2.5 mm/1 x 3 mm/1 x 3.5 mm/1 x 4 mm/1 x 4.5 mm/1 x 5.5 mm/1 x 6 mm		
Stone Drill Bits 1 x 5 mm/1 x 5.5 mm/1 x 6 mm/1 x 7 mm/1 x 8 mm/1 x 8 mm/1 x 9 mm/1 x 10 mm		
Nut Drivers 1 x Hex 6/1 x Hex 8/1 x Hex 10		
Lip & Spur Wood Drill Bits 1 x 4 mm/1 x 5 mm/1 x 6 mm/1 x 7 mm/1 x 8 mm	4932430411	4002395380725
Flat Boring Bits 1 x 16 mm/ 1 x 18 mm		
Screwdriving bits 25 mm bits (1 of each) SL 0.6 x 4.5/ SL 0.8 x 5.5/ PH 1/ PH 2/ PH 3/ PZ 1/ PZ 2/ PZ 3/ TX 10/ TX 15/ TX 20/ TX 25/ TX 30/ TX 35/ TX 40/ Hex 4/ Hex 5/ Hex 6 50 mm bits PH 1/ PZ 2		
Magnetic bit holder		



#### **METAL DRILL BITS HSS-G COBALT (DIN 338)**

- Metal drill bits ground from solid extremely heat resistant cobalt-alloyed high speed steel produced according to DIN 338. Polished finish. Split point shaped cutting tip with 135° angle for improved centering - no center punched required.
- 5% Cobalt content. Withstands high drilling heat.
- Type N flute normal angle.
- Suitable for drilling high alloy content steels and metals with tensile strengths of over 1000 N/mm like heat and acid proof steels and stainless steel.
- Colour: bronze.


Ø (mm)	Total length A (mm)	Working length B (mm)	Quantity	Article Number	EAN Code
2.0	49	24	2	4932430416	4002395380770
3.0	61	33	2	4932430417	4002395380787
3.2	65	36	2	4932430418	4002395380794
4.0	75	43	2	4932430419	4002395380800
4.8	86	52	1	4932430420	4002395380817
5.0	86	52	1	4932430421	4002395380824
6.0	93	57	1	4932430422	4002395380831
7.0	109	69	1	4932430423	4002395380848
8.0	117	75	1	4932430424	4002395380855
9.0	125	81	1	4932430425	4002395380862
10.0	133	87	1	4932430426	4002395380879
11.0	142	94	1	4932430427	4002395380886
12.0	151	101	1	4932430428	4002395380893
13.0	151	101	1	4932430429	4002395380909



#### **MASONRY DRILL BITS**

• Carbide tip with diamond ground cutting edges with 130° angle - For drilling in brick and aerated conret blocks

Ø (mm)	Total length A (mm)	Working length B (mm)	Quantity	Article Number	EAN Code
4	75	40	1	4932363591	4002395332410
5	85	50	1	4932363593	4002395332434
5.5	85	50	1	4932363595	4002395332458
6	100	60	1	4932363597	4002395332472
6	150	85	1	4932367032	4002395333967
7	100	60	1	4932363599	4002395332496
8	120	80	1	4932363600	4002395332502
8	200	135	1	4932363612	4002395332366
10	120	80	1	4932363602	4002395332526
10	200	135	1	4932363613	4002395332373
12	150	85	1	4932363604	4002395332540
ingle Power Set Sto	ne Drill Bits (10pcs)			(072752270	/ 00370574 0007
Contents: Ø 4/5/5.5/6 (2pcs)/7/8	(2pcs)/9/10 mm			4932352239	4002395368983





#### HIGH PERFORMANCE BI-METAL HOLESAWS / SYSTEM ACCESSORIES

Ø (mm)	Ø (inch)	Article Number	EAN Code	Ø (mm)	Ø (inch)	Article Number	EAN Code
14	9/16	4932367244	4002395335947	57	2 1/4	4932367266	4002395336173
16	5/8	4932367245	4002395335954	60	2 <sup>3</sup> / <sub>8</sub>	4932367267	4002395336180
19	3/4	4932367247	4002395335978	64	2 1/2	4932367268	4002395336197
20	<sup>25</sup> / <sub>32</sub>	4932367248	4002395335985	65	2 %16	4932367269	4002395336203
21	<sup>13</sup> / <sub>16</sub>	4932367249	4002395335992	68	2 11/16	4932371580	4002395345250
22	<sup>7</sup> /8	4932367250	4002395336005	70	2 3/4	4932367271	4002395336227
24	<sup>15</sup> / <sub>16</sub>	4932367251	4002395336012	73	2 7/8	4932367272	4002395336234
25	1	4932367252	4002395336029	76	3	4932367273	4002395336241
27	1 1/16	4932367253	4002395336036	79	3 ½	4932367274	4002395336258
29	1 1//s	4932367289	4002395336043	83	3 1/4	4932367275	4002395336265
30	1 <sup>3</sup> /16	4932367254	4002395336050	89	3 ½	4932367277	4002395336289
32	11/4	4932367255	4002395336067	92	3 5/8	4932367278	4002395336296
35	1 <sup>3</sup> / <sub>8</sub>	4932367256	4002395336074	98	3 7/8	4932367280	4002395336319
38	1½	4932367257	4002395336081	102	4	4932367281	4002395336326
40	1 %	4932367258	4002395336098	105	4 ½	4932367282	4002395336333
43	1 11/16	4932367259	4002395336104	114	4 1/2	4932367284	4002395336357
44	1 <sup>3</sup> / <sub>4</sub>	4932367260	4002395336111	121	4 3/4	4932367285	4002395336364
48	1 <sup>7</sup> /s	4932367262	4002395336135	127	5	4932367286	4002395336371
51	2	4932367263	4002395336142	152	6	4932367288	4002395336395
54	2 1/4	4932367265	4002395336166				

		Article Number	EAN Code
Arbor Hex 11 -5/8" x 18 - 1pc	FIXTEC arbor <sup>5</sup> ½" x 18 11 mm Hex for holesaws Ø 32 - 152 mm	4932367421	4002395337422
Arbor Hex 9 -1/2"x20 - 1pc	Arbor 1/2" x 20 Light duty arbor 1/2" x 20 Hex 9 for holesaws Ø 14 - 30 mm	4932367422	4002395337439
Pilot Drill - Long - 1pc	Pilot drill bit long For use with arbor <b>4932367421</b>	4932367423	4002395337446
Pilot Drill - Short - 1pc	Pilot drill bit short For use with arbor <b>4932367422</b>	4932367424	4002395337453



120 ACCESSORIES 121

#### JIGSAW BLADES FOR WOOD / PLASTICS / METAL

Blade length (mm)	pitch	Ref. No.	Quantity	Description	Max. cutting capacity wood (mm)	Max. cutting capacity laminated chipboard (mm)	Max. cutting capcity parquet laminate (mm)	Max. cutting capacity PVC (mm)	Max. cutting capacity non- ferrous metals (mm)	Max. cutting capacity metal pipe Ø (mm)	Max. cutting capacity aluminium (mm)	Article Number	EAN Code
75	3	T 111 C	5	For rough cutting	5-60			< 40				4932352144	4002395367979
/3	<u> </u>	TITIC		Poi Tought Curning	3-00			\ 40				4732332144	4002393307979
50	1.35	T 101 AO	5	For fast, clean, curve cutting	< 20		< 20	<15				4932352145	4002395367986
75	4	T 244 D	5	For rough, curve cutting	< 60							4932352146	4002395367993
75	4	T 144 D	5	For fast, rough cutting	< 60							4932352147	4002395368006
3521 4	a .570	A	EG										
75	2.5	T 101 B	5	For very clean, splinter free cutting	< 30	< 60		< 30				4932352148	4002395368013
3521 4	9 550		EG										
75	4	T 101 D	5	For fast, clean, splinter free cutting	< 60	< 60		< 45				4932352149	4002395368020
55	1.2	T 118 A	5	For thin sheet metal					1.5-4	1.5-4		4932352150	4002395368037
THE STATE OF		AEG											
55	2	T 118B	5	Rougher cuts in metal					3-6	3-6	3-10	4932352151	4002395368044
			12 piece set	in container									
			Suitable for	applications in wood, cutting workto	ps and lam	inate flooring a	nd metals					4932373494	4002395349944
	Power Set 50pcs - jigsaw blades for wood and metal												
			10 x T 144 I	D/ 10 x T 101 B/ 15 x T 118 A/ 15 x T 1	88 B							4932352253	4002395369126

#### **CIRCULAR SAW BLADES FOR PORTABLE TOOLS**

Total length (mm)	Work-ing length (mm)	No. of teeth	Cutting width (kerf) (mm)	Fibre cement board	Chip- board	MDF and fibre- board	Lami- nated chip- board	Plyywood & OSB boards	Plastics	Plaster- board	Non ferrous metals profiles alu	Fine cut	Article Number	EAN Code
127	20	6	1.8	<b>✓</b>						<b>✓</b>		<b>V</b>	4932352534	4002395371921
127	20	40	1.8		~	<b>V</b>	~	<b>V</b>	~			~	4932352535	4002395371938
160	20	48	2.2		~	<b>V</b>	<b>V</b>	<b>V</b>	~			<b>✓</b>	4932352868	4002395375264
160	20	48	2.2						~		~	~	4932352869	4002395375271
165	20	24	2.6		~	<b>V</b>	<b>V</b>	<b>V</b>	~				4932430311	4002395379729
165	20	52	2.8		~	<b>V</b>	<b>V</b>	<b>V</b>	~			~	4932430312	4002395379736
184	30	24	1.8		~	<b>V</b>	<b>V</b>	<b>V</b>	~			~	4932352874	4002395375325
190	30	24	2.2		<b>V</b>	<b>V</b>	<b>V</b>	<b>V</b>	~				4932430469	4002395381302
190	30	48	2.8		<b>V</b>	V	<b>V</b>	<b>V</b>	<b>V</b>		·	<b>V</b>	4932430470	4002395381319

#### CIRCULAR SAW BLADES FOR CORDLESS TOOLS

Total length (mm)	Work-ing length (mm)	No. of teeth	Cutting width (kerf) (mm)	Fibre cement board	Chip- board	MDF and fibre- board	Lami- nated chip- board	Plyywood & OSB boards	Plastics	Plaster- board	Non ferrous metals profiles alu	Fine cut	Article Number	EAN Code
165	15.8	18	1.5		~	<b>✓</b>	~	~	~			~	4932430366	4002395380275

#### MITRE SAW BLADES

Total length (mm)	Work-ing length (mm)	No. of teeth	Cutting width (kerf) (mm)	Fibre cement board	Chip- board	MDF and fibre- board	Lami- nated chip- board	Plyywood & OSB boards	Plastics	Plaster- board	Non ferrous metals profiles alu	Fine cut	Article Number	EAN Code
216	30	48	2.4		<b>V</b>	V	<b>V</b>	V	~				4932430721	4002395383825
254	30	48	3.2		V	~	V	V	~				4932430471	4002395381326
254	30	80	3.2								~	V	4932430472	4002395381333
305	30	60	3.2		<b>V</b>	~	<b>V</b>	V	~			<b>V</b>	4932430473	4002395381340
305	30	96	3.2								<b>V</b>	V	4932430474	4002395381357

ACCESSORIES 123 122 ACCESSORIES

#### **RECIPROCATING SAW BLADES FOR WOOD / PLASTICS / METAL**

Blade length (mm)	Tooth pitch (mm)	Ref. No.	Quantity	Description	Article Number	EAN Code
AEG						
150	2.5	S811H	3	For all woods, nail embedded wood, plaster board 3-100 mm, non-ferrous metals, aluminium 3-10 mm, plastic pipes	4932318127	4002395301959
AEG.		1/	100000000000000000000000000000000000000			
150	4.2	S744D	2	For fast scroll cutting 6-100 mm	4932323801	4002395304240
AEG AEG		20 20 20 20 2	·	>		
150	4	S644D	2	For fast cutting of wood and plastic, plunge cutting, 6-100 mm	4932323800	4002395304233
A66	200000	20000	20000	mmm		
240	8.5	S1542K	2 2	Special hardened teeth design, for fast coarse cut, as well for green and fire wood, 20-180mm	4932323804	4002395304271
AEG						
300	4.2	51344D		For cutting large timbers and plastic, clean cut, 6-250 mm	4932323802	4002395304257
O AEG						7000010001
150	1.4	S922EF		For all metals with a wall thickness between 15-4 mm	4932354792	4002395324477
O AEG		J7ZZLI		1 Of all filerals will a wait filexness between 1.5°4 fillil	4732334772	40023733244//
mm	***************************************					
150	1.8	S922BF	3	For all metals with a wall thickness between 3-10 mm	4932354789	4002395324446
	EG					
230	Coarse grit	S1130R	2	For abrasive materials, fibreglass materials (polyesters, expoxies, melamines), cast iron pipes	4932373386	4002395348817
-7						
450	17	-	1	For abrasive materials ie. bricks, soft abrasive blocks	4932430447	4002395381081
0		~~~				
300	4.2	-	1	For cutting of frozen materials	4932430448	4002395381098
400	4.2	-	1	For cutting of frozen materials	4932430449	4002395381104

#### **ATTACHMENTS**

Description	Article Number	EAN Code	
Xtractor - 1pc  The ideal dust extraction solution.  The Xtractor can be used with all household and industrial dust extraction units with a hose diameter from 26-41 mm.	4932373501	4002395351862	X

#### **BLADES FOR OSCILLATING TOOL**


- Universal blade reception make AEG blades compatible with most popular oscillating tools
- Every blade pack contains both washers






Description	Cutting width (mm)	Max. cutting depth (mm)	Quantity	Article Number	EAN Code
Bi-Metal plunge cutting blade Application:  Wood, metal, PVC Plunge cutting in wood/ steel/ copper/ aluminium	28	40	1	4932430315	4002395379767
Plunge cutting blade Application:  Wood, PVC Plunge cutting in soft and hard wood, PVC Recess cutting in wood. Flush cutting to length in wood	28	40	1	4932430316	4002395379774
Plunge cutting blade Application: Wood, PVC Plunge cutting in soft and hard wood, PVC Blade sits flush when cutting in door jambs Recess cutting in wood	9	40	1	4932430317	4002395379781
Bi-Metal flush cutting blade Application: Wood, metal, PVC  Plunge cutting in solid wood Flush cutting in wood Cutting steel. copper/ aluminium/ metal pipes and profiles with small dimensions. Cutting PVC pipes to length	88 C	20	1	4932430319	4002395379804
Grout removal blade Application: Grout, mortar, soft tiles Routing grout joints on wall and floor tiles	85	20	1	4932430318	4002395379798
9pc Set 2 x bi-metal plunge cutting blades 2 x plunge cutting blades 28 mm (a) 2 x plunge cutting blades 9 mm 1 x bi-metal flush cutting blade 1 x scraper 1 x grout blade			9	4932430314	4002395379750
Washer Set  To fit Bosch keyless oscillating tool To fit Dremel keyless oscillating tool			2	4931441298	4002395872541

















#### SANDING ACCESSORIES FOR OSCILLATING TOOL

Description	Grit	Dimensions (mm)	Quantity	Article Number	EAN Code	_
(8) Sanding Pad		93x93	1	4932430320	4002395379811	
10pc Set Sanding paper Hook & Loop 4 x Grit 60 3 x Grit 80 3 x Grit 120 (a) Application: Wood, PVC For sanding small areas, e.g. in corners, along edges, in restricted areas and tight spaces, sanding down of surface blemishes.	6080120	93x93	10	4932430321	4002395379828	








124 ACCESSORIES 125

#### **ABRASIVE PAPER- HOOK & LOOP FOR FDS 140**

- Perforated sanding discs for wood, metal, paint, lacquer, plaster
- Grit type: fused alumina, half-open
- Artifical resin-bonded on special tear-resistant paper


Grit	Dimensions (mm)	Quantity	Article Number	EAN Code
60	115 x 107	10	4932352420	4002395370795
80	115 x 107	10	4932352421	4002395370801
120	115 x 107	10	4932352422	4002395370818
240	115 x 107	10	4932352423	4002395370825



#### **ABRASIVE PAPER- CLAMP TYPE FOR FDS 140**


- Perforated sanding discs for wood, metal, paint, lacquer, plaster
- Grit type: fused alumina, half-open
- Artificial resin-bonded on special tear-resistant paper

Grit	Dimensions (mm)	Quantity	Article Number	EAN Code
60	115 x 140	10	4932352424	4002395370832
80	115 x 140	10	4932352425	4002395370849
120	115 x 140	10	4932352426	4002395370856
240	115 x 140	10	4932352427	4002395370863



#### **ABRASIVE DELTA PAPER- HOOK & LOOP FOR FDS 140**

Grit	Dimensions (mm)	Quantity	Article Number	EAN Code
60	110 x 88	10	4932352925	4002395375837
80	110 x 88	10	4932352926	4002395375844
120	110 x 88	10	4932352927	4002395375851
240	110 x 88	10	4932352928	4002395375868



#### **ABRASIVE DISCS- HOOK & LOOP- 6 HOLES**

- Perforated sanding discs for wood, metal, paint, lacquer, plaster
- Grit type: fused alumina, half-open
- Artificial resin-bonded on special tear-resistant paper

Grit	Ø (mm)	Quantity	Article Number	EAN Code
40	150	5	4932430454	4002395381159
60	150	5	4932430455	4002395381166
80	150	5	4932430456	4002395381173
120	150	5	4932430457	4002395381180
180	150	5	4932430458	4002395381197
240	150	5	4932430459	4002395381203



#### **POLISHING ACCESSORIES- HOOK & LOOP**

Description	Ø (mm)	Height (mm)	Quantity	Article Number	EAN Code
Polishing backing pad Application: Reception of felt- / lambswool polishing discs and polishing sponges Characteristics: M14 thread, break resistant with integrated soft and flexible foam layer, Hook & Loop fixation	150	25	1	4932430450	4002395381111
Lambswool polishing disc Application: Finishing high gloss polishing Requires polishing backing pad Characteristics: Natural lambs wool, very soft and adaptable Hook & Loop fixation	150		1	4932430453	4002395381142
Polishing sponge - hard Application: Polish up of weather-beaten lacquer, lacquer reconditioning Requires polishing backing pad Characteristics: Medium hard, fine pored, with rounded edge, Hook & Loop fixation	150	50	1	4932430452	4002395381135
Polishing sponge- soft Application: Second polish of lacquer, lacquer care Requires polishing backing pad Characteristics: Super-soft, fine pored, with rounded edge, Hook & Loop fixation	150	50	1	4932430451	4002395381128









#### **BASE PLATES**

Description	Ø (mm)	No. of holes	Article Number	EAN Code
Base plate for EX 125 ES Complete with rubber ring as spare	125	8	4932352870	4002395375288
Base plate for EX 150 E Complete with rubber ring as spare	150	6	4932352871	4002395375295





120 NOTES	NOTES	IZ



# CORDLESS/HAMMERS/DRILLING/ METALWORKING/WOODWORKING/ ACCESSORIES

AEG POWERTOOLS promises to draw upon its heritage and deliver exciting, high performance, innovative working solutions for the professional tradesmen of today and the future.

#### AEG POWER TOOLS

P.O. Box 320 D-71361 Winnenden Germany

Tel.: +49 71 95 12-0 Fax: +49 71 95 12-666

www.aeg-powertools.com



© AEG POWERTO

AEG POWERTOOLS reserve the right to change all data including images, specification and service and warranty information without notice. AEG POWERTOOLS will hold no liability for printing errors or mistakes.

4939 6290 00